

PLANNING & ZONING COMMISSION



Dennis Wilson
Commission Chair
P&Z@ci.moscow.id.us

Regular Meeting
~Agenda~

Mike Ray
Staff Liaison
208.883.7008

<https://www.ci.moscow.id.us/581/Agendas-and-Minutes>

Wednesday
August 28, 2024

7:00 PM

Council Chambers
206 E Third Street

WELCOME AND ATTENDANCE

REGULAR AGENDA

1. Approval of August 14, 2024 Minutes (ACTION ITEM)

PROPOSED ACTIONS: Approve minutes as presented; approve minutes with amendments; or provide staff further direction.

2. Public Comment

Time limit 15 minutes. Members of the Public may speak to the Commission regarding matters NOT on the Agenda nor currently pending before the Planning and Zoning Commission. Please state your name and resident city for the record and limit your remarks to three (3) minutes.

3. Proposed Final Subdivision Plat for the Replat of Lot 12 and Lot 13, Block 3 of the Quail Run Addition (ACTION ITEM)

Proposed Final Replat of a 2.08-acre property to create seven (7) lots with an average lot size of 12,931 square feet, referred to as the Replat of Lot 12 and Lot 13, Block 3 of the Quail Run Addition.

PROPOSED ACTIONS: Review the Replat of Lot 12 and Lot 13, Block 3 of the Quail Run Addition final plat and recommend approval to City Council; or recommend approval of the final plat with conditions; or recommend denial of the final plat; or provide Staff further direction as deemed necessary.

4. Proposed Final Subdivision Plat and Final PUD for the Wildrose Court Addition (ACTION ITEM)

Proposed Final Plat and Final Planned Unit Development (PUD) of the 2.53-acre area to create 16 lots ranging from 3,000 square feet to 10,666 square feet in size, referred to as Wildrose Court.

PROPOSED ACTIONS: Review the Wildrose Court Addition final plat and final PUD and recommend approval to City Council; or recommend approval of the final plat and final PUD with conditions; or recommend denial of the final plat and final PUD; or provide Staff further direction as deemed necessary.

NOTICE: It is the policy of the City of Moscow that all City-sponsored public meetings and events are accessible to all people. If you need assistance in participating in this meeting or event due to a disability under the ADA, please contact the City's ADA Coordinator by phone at (208) 883-7600, TDD (208) 883-7019, or by email at adacoordinator@ci.moscow.id.us at least 48 hours prior to the scheduled meeting or event to request an accommodation. The City of Moscow is committed to ensuring that all reasonable accommodation requests are fulfilled.

REPORTS

1. Transportation Commission meeting report.

ANNOUNCEMENTS**UPCOMING EVENTS/MEETINGS**

The next Planning & Zoning Commission regular meeting is scheduled for September 11, 2024.

ADJOURN

NOTICE: It is the policy of the City of Moscow that all City-sponsored public meetings and events are accessible to all people. If you need assistance in participating in this meeting or event due to a disability under the ADA, please contact the City's ADA Coordinator by phone at (208) 883-7600, TDD (208) 883-7019, or by email at adacoordinator@ci.moscow.id.us at least 48 hours prior to the scheduled meeting or event to request an accommodation. The City of Moscow is committed to ensuring that all reasonable accommodation requests are fulfilled.

PLANNING & ZONING COMMISSION



Dennis Wilson
Commission Chair
P&Z@ci.moscow.id.us

Regular Meeting
~Minutes~

Mike Ray
Staff Liaison
208.883.7008

<https://www.ci.moscow.id.us/457/Planning-Zoning-Commission>

Wednesday
August 14, 2024

7:00 PM

Council Chambers
206 E Third Street

Wilson called the meeting to order at 7:00 PM

MEMBERS PRESENT: Dennis Wilson, Chair; Joel Hamilton, Robb Parish, Nels Reese, Sue Scott, Victoria Seever
MEMBERS ABSENT: Rich Beebe, Scott Gropp, Cole Mize
OTHERS: Bryce Blankenship
STAFF: Jennifer Fleischman, Mike Ray

REGULAR AGENDA

1. Approval of July 10, 2024 Minutes (ACTION ITEM)

Hamilton moved for approval of the minutes as written, seconded by Parish. Roll Call Vote; Ayes: Unanimous (6). Nays: None. Abstentions: None. Motion carried.

2. Public Comment

Time limit 15 minutes. Members of the Public may speak to the Commission regarding matters NOT on the Agenda nor currently pending before the Planning and Zoning Commission. Please state your name and resident city for the record and limit your remarks to three (3) minutes.

None.

3. Public Hearing: Legislative Hearing Providing for the Repeal of Title 5, Chapter 1; Providing for the Amendment of Title 4, Chapter 1, Chapter 4, and the Addition of Chapter 12 of Moscow City Code Regarding Amendments to the Subdivision Code (ACTION ITEM)

The Commission worked on updating the City's subdivision code in 2019 and 2020, including the lot division and lot line adjustment processes. There was a public hearing for the proposed code amendment on June 24, 2020 and it was recommended for approval to City Council. A new streets chapter, which is intended to replace the previous location of the subdivision code, Title 5 – Chapter 1, was concurrently in the process of being drafted by the Engineering Department. The new streets chapter largely contained items that are under the duties of the Engineering Department which were previously located in the zoning and subdivision codes, but had been removed in anticipation of the new subdivision code. The streets chapter was nearing completion in 2023, so the Planning and Zoning Commission conducted a second public hearing on the subdivision code on April 12, 2023. Prior to advancing on to City Council, it was determined that a joint meeting between City Council and the Planning and Zoning Commission should be conducted in case any further code amendments were needed. On March 25, 2024, the joint meeting was conducted and no further direction regarding the subdivision ordinance was given to staff. Since more than a year has passed since the last public hearing, the Planning and Zoning Commission will conduct an additional public hearing before advancing to City Council.

Ray presented the proposed Code Amendments as described above, and recommended the Commission approve and put before City Council. Graphics and images are not included in legislative code. There was a

brief conversation about the differences between R-1 and R-2 zones and the lot requirements for each type. There is a 15-day appeal period following a decision regarding Lot Line Adjustments and Lot Divisions where an affected person can file an appeal. Stormwater detention ponds are built by the developers but maintained by the City when they are part of a subdivision. Staff clarified how a dwelling unit is defined, according to code.

Public Hearing opened at 7:38 PM

No comments.

Public Hearing closed at 7:39 PM

Parish moved to recommend approval of the Code Amendments regarding the Subdivision Code, as written. The motion was seconded by Seever. Roll Call Vote; Ayes: Unanimous (6). Nays: None. Abstentions: None. Motion carried.

REPORTS

1. Transportation Commission meeting report.

The last meeting was July 11, 2024 and there was a discussion about the draft 2025-2034 Capital Improvement Plan. Staff will send out a link to the City website where the document is and will also add an agenda item for discussion at an upcoming meeting. The Commission had a conversation about plans for the old Hwy 95, when it is turned over to the City. There will be updated Comprehensive Sewer and Water Plans soon. A Commissioner suggested that a 4-way stop be added to the intersection at Third Street and Hayes Street.

ANNOUNCEMENTS

The Idaho APA annual conference is scheduled to occur in Moscow from October 2-4. The Commission budget can pay for registration costs.

UPCOMING EVENTS/MEETINGS

The next Planning & Zoning Commission regular meeting is scheduled for August 28, 2024.

Staff has received several applications that will be presented at the next meeting.

Wilson declared the meeting adjourned at 7:56 PM

Dennis Wilson, Chair

Date

Memo

To: Planning and Zoning Commission

From: Mike Ray, AICP - Planning Manager

Date: August 22, 2024

Re: Replat of Lot 12 and Lot 13, Block 3 of the Quail Run Addition Final Plat Review

The Planning & Zoning Commission conducted a public hearing on September 27, 2023 to consider the request of RMR Construction LLC for a Preliminary Plat of a 2.08-acre property to create seven (7) lots with an average lot size of 12,931 square feet, referred to as the Replat of Lot 12 and Lot 13, Block 3 of the Quail Run Addition. After considering public testimony and the relevant criteria and standards, the Planning and Zoning Commission recommended approval of the preliminary subdivision plat with no conditions.

City Council then conducted a public hearing on November 6, 2023 and approved the Replat of Lot 12 and Lot 13, Block 3 of the Quail Run Addition preliminary plat with no conditions.

On August 14, 2024 the applicant submitted the final subdivision plat to be reviewed by the Planning and Zoning Commission and City Council. Staff has reviewed the final plat for conformance with City and State Code requirements and found it to be in conformance.



**CITY OF MOSCOW
COMMUNITY DEVELOPMENT**
Ph.: 208-883-7035
504 S. Washington Street
jfleischman@ci.moscow.id.us
mray@ci.moscow.id.us

For City Use Only			
Date Received			
Dept	Fee Type	Fees	Paid
CDV	Application Fee	\$474.00 plus \$28.50/lot	
Receipt Number			

APPLICATION FOR FINAL SUBDIVISION PLAT

(Please type or print plainly with blue ink.)

APPLICANT:

Name: RMR Construction LLC Phone: 208-859-4941
Address: P.O. Box 10001 Moscow, ID 83843 Email: smisek@moscow.com

OWNER: (if other than applicant)

Name: _____ Phone: _____
Address: _____ Email: _____

ENGINEER/SURVEYOR:

Name: Nuri Nimmer / Michael Dahlin Phone: 208-882-3520 / 208-883-5339
Address: 405 S Washington St Moscow, ID 83843 Email: nurinimmer@moscow.com

Primary point of contact (select one): Applicant ☐ Owner ☐ Engineer/Surveyor ☒

PROPERTY:

- Proposed Subdivision Name: Replat of Lot 12 and Lot 13 of Block 3 Quail Run Addition
- Address(es) or Parcel Number(s): RPM080250030130A and RPM08250030120A
- Legal Description: Please attach copy of full description.
- Gross Area of all land involved: 2.08± acres, and/or _____ sq. ft.
- Total Net Area of land area, exclusive of proposed or existing public street and/or other public lands:
2.08± acres, and/or _____ square feet.
- Total number of lots: 7 Average lot size: 12,931 sq. ft.

SEWER AND WATER MAIN OVERSIZING REIMBURSEMENT POLICY:

Oversizing of utilities will not be eligible for reimbursement from the City unless a written request is submitted to the City Engineer prior to approval of the project construction drawings and a written approval of such request is issued by the City Engineer.

FINAL PLAT CHECKLIST:

All final plats, including the legal description of the exterior boundary, shall be prepared in accordance with the Idaho Code. Final plats shall be drawn to a scale no larger than 1"=100' unless pre-approved by the city engineer. The final plat drawing shall not be substantially different than the approved preliminary plat for the subdivision and shall contain the following information:

- ☒ 1. Name of subdivision and its location by section, township, range, and county, with drawing scale, date of submission, and north arrow.
- ☒ 2. Name, address, phone number, registration number and seal of the professional land surveyor preparing the plat, and name of subdivider and owners of property being platted.
- ☒ 3. Boundary lines of property being platted including bearings, distances and curve data based on an accurate survey in the field closing within the tolerances prescribed by Idaho Code; lines of departure and owners of unplatted adjoining property; and lots, blocks and names of adjoining subdivisions. Adjoining subdivision lots shall be shown with dashed lines.
- ☒ 4. Names and widths of all proposed streets; bearings, distances, and curve data of all street centerlines; location, width, purpose, and dimensions of easements; location and description of all property being dedicated for public use. All curves shall be described by central angle, radius, arc length, and chord bearing and distance.
- ☒ 5. Location, name, and widths of adjacent street rights-of-way, the location and width of adjacent public easements, and the location and purpose of any adjacent property previously dedicated for public use.
- ☒ 6. Lots and blocks with lots numbered consecutively within each block; bearings, distances, and curve data for each lot; the square footage of lots less than one acre in size or acreage of lots one acre or greater. Blocks shall be labeled consecutively. All curves shall be described by central angle, radius, arc length, and chord bearing and distance.
- ☒ 7. Location and description of all monuments, including found monuments. If interior monuments are not set at the time the plat is recorded (as allowed by Idaho Code), include a statement indicating the date which they shall be set. Said date shall be approved by the City Engineer.
- ☒ 8. Basis of bearing used to determine bearings shown on plat.
- ☒ 9. Point of beginning of the subdivision with ties to the point of beginning from a minimum of two established corners of the Public Land Survey System (PLSS) in one or more of the sections containing the subdivision. List the recording numbers of the corner perpetuation and filing forms of the PLSS monuments. List horizontal coordinates for each PLSS monument and the point of beginning based on the Idaho Coordinate System West Zone. All coordinates values shall be grid coordinates based on the North American Datum of 1983 (NAD83) and specified as such.
- ☒ 10. Street centerline monuments at each intersection, point of curvature, and point of tangency. Street monuments shall be constructed in accordance with City of Moscow standard specifications for street monuments. All other monuments shall be as prescribed by Idaho Code.
- ☒ 11. Signed certificate by the owners of the land containing a correct legal description of the land, with the statement containing their intentions to include the same in the plat, and make a dedication of all

public rights-of-way, easements, and parkland. The owners' signatures upon the certificate shall be notarized upon the plat by an officer duly authorized to take acknowledgements. If the property being mortgaged, the signature of the mortgagee's representative is also required.

- ✓ 12. Signed certificate by the land surveyor, stating that the plat is correct and accurate, the land survey of the platted property was performed by him/her or under his/her direct supervision, the monuments indicated on the plat have been located as described, and the surveying and platting was done in accordance with Idaho Code. The statement shall be accompanied by the seal of the registered professional land surveyor, signed and dated. The surveyor shall in every case have a valid certificate of registration with the Idaho Board of Registration of Professional Engineers and Professional Land Surveyors.
- ✓ 13. Signed certificate by the City of Moscow Planning and Zoning Commission with date of approval.
- ✓ 14. Certificate stating that the City Council has approved the plat and accepts all public dedications as shown thereon. The certificate shall be signed by the Mayor and attested to by the City Clerk.
- ✓ 15. Certificate by the City Engineer that the plat conforms to the requirements of Title 50, Chapter 13, Idaho Code, and with the requirements of this chapter.
- ✓ 16. Signed certification by the subdivider stating the City of Moscow has agreed in writing to supply water to all the lots in the subdivision from the municipal water system.
- ✓ 17. Certificate signed and sealed by the Latah County Surveyor stating the plat and computations have been checked and the plat meets the requirements of Title 50, Chapter 13, Idaho Code.
- ✓ 18. Certificate of satisfaction of the sanitary restrictions, to be endorsed by the Latah County Recorder at the time of filing if the sanitary restrictions have been satisfied according to Idaho Code, Section 50-1326.
- ✓ 19. Certificate that taxes have been paid to date on the property to be signed by the Latah County Treasurer at the time of filing.
- ✓ 20. Certificate of recording, to be signed by the Latah County Recorder at the time of filing.

The following items must be submitted with this application before it will be processed:

- 1. Application fees
- 2. One full-sized Final Plat Map and one electronic copy.

I understand this information is a public record and may be posted to a public website. I certify under penalty of perjury pursuant to the law of the State of Idaho that the foregoing is true and correct.

Stacy Smisek , member

7/24/24

Signature of Applicant

Date

Stacy Smisek, member

7/24/24

Signature of Property Owner (if different)

Date

Section 5, T39N, R5W, BM

LEGAL DESCRIPTION

A parcel of land, being Lots 12 & 13 of Block 3 of Quail Run Addition to the City of Moscow, Instrument #626554, Latah County Records, located in the Southwest Quarter of the Southwest Quarter of Section 5, Township 39 North, Range 5 West, Boise Meridian, Latah County, Idaho, described as follows:

Beginning at the northwest corner of Quail Run Addition to the City of Moscow, Instrument #414835, Latah County Records, Thence along the north line thereof the following two courses:
S89°18'40"E, 269.02 feet to the northwest corner of Lot 12 of Block 3 of said Quail Run Addition;
Thence S89°18'40"E, 100.23 feet to the northeast corner of Lot 12 of Block 3 of said Quail Run Addition;
Thence along the east boundary of said Lot 12 the following two courses:
S23°27'24"W, 327.40 feet;
Thence S61°49'36"W, 104.90 feet to the north right-of-way line of Pintail Lane;
Thence along said north right-of-way line the following two courses:
64.92 feet along a curve to the left, said curve having a Delta = 16°31'57", Radius = 225.00 feet, Chord = 64.70 feet and a Chord Bearing = N41°41'26"W to the southeast corner of Lot 13 of Block 3 of Quail Addition;
Thence 108.49 feet along a curve to the left, said curve having a Delta = 27°37'36", Radius = 225.00 feet, Chord = 107.44 feet and a Chord Bearing = N63°46'13"W to the southwest corner of Block 3 of Quail Addition and a point on the east right-of-way line of State Highway 95;
Thence along said east right-of-way line and along the west boundary of said Block 3 the following three courses:
N00°39'36"E, 239.30;
Thence S84°15'15"W, 10.06 feet;
Thence N00°39'36"E, 20.24 feet to the Point of Beginning.

Parcel contains 2.08 Acres, more or less.

DEDICATION

Know all persons by these presents, that RMR Construction LLC, owner of the land and premises described above, has caused said land to be subdivided and platted as shown hereon as an addition to the City of Moscow, Latah County, Idaho, to be known as the Replat of Lots 12 & 13 of Block 3 of Quail Run Addition to the City of Moscow, Latah County, Idaho. The easements as shown on this plat are hereby reserved for public access and utility purposes as designated hereon and no permanent structures are to be erected within the lines of said easements. The owner certifies that all lots within this plat will be eligible to receive water service from an existing water system, be the water system municipal, a water district, a public utility subject to the regulation of the Idaho public utilities commission, or a mutual or nonprofit water company, and the existing water distribution system has agreed in writing to serve all of the lots in the subdivision (Section 50-1334, Idaho Code). The owner does herewith dedicate the southwesterly 5.00 feet of this land, adjacent to Pintail Lane, as public right-of-way.
In witness thereof, the undersigned have set their hands.


Stacy Smisek,
Member, RME Construction, LLC

State of _____
County of _____

On this _____ day of _____, 2024, before me, the undersigned Notary Public in and for the State of _____, personally appeared Stacy Smisek, known or identified to me to be the a member of the corporation that executed the instrument or the person who executed the instrument on behalf of said corporation, and acknowledged to me that such corporation executed the same.

In witness whereof, I hereunto set my hand and official seal.

Notary Public, _____
Residing in _____
My Commission Expires _____



APPROVALS

Moscow Planning and Zoning Commission

Approval of this plat by the City of Moscow certifies agreement to allow connection of the above described property to the municipal water system and satisfies Section 50-1334, Idaho Code. Examined and approved by action of the Moscow Planning and Zoning Commission at a regular meeting with a quorum present this _____ day of _____, 2024.

Chairman, Planning and Zoning Commission

Moscow City Council

Examined and approved by action of the Moscow City Council at a regular meeting with a quorum present this _____ day of _____, 2024.
Dedication of all public streets, easements, and parkland described on this plat is hereby accepted in accordance with Section 50-1313, Idaho Code.

Clerk _____ Mayor, City of Moscow

City Engineer, City of Moscow

Examined and approved by the City Engineer this _____ day of _____, 2024.

City Engineer, City of Moscow

Latah County Surveyor

Examined and approved by the Latah County Surveyor this _____ day of _____, 2024.

Latah County Surveyor

Latah County Treasurer


I hereby certify that taxes and assessments on property shown hereon have been paid for 2023 and preceding years as of this _____ day of _____, 2024.

Latah County Treasurer

Public Health - Idaho North Central Health District

Sanitary restrictions as required by Idaho Code, Title 50, Chapter 13 have been satisfied. Sanitary restrictions may be reimposed, in accordance with Section 50-1326, Idaho Code, by the issuance of a certificate of disapproval.


Public Health - Idaho North Central District, _____ Date _____
Senior Environmental Health Specialist

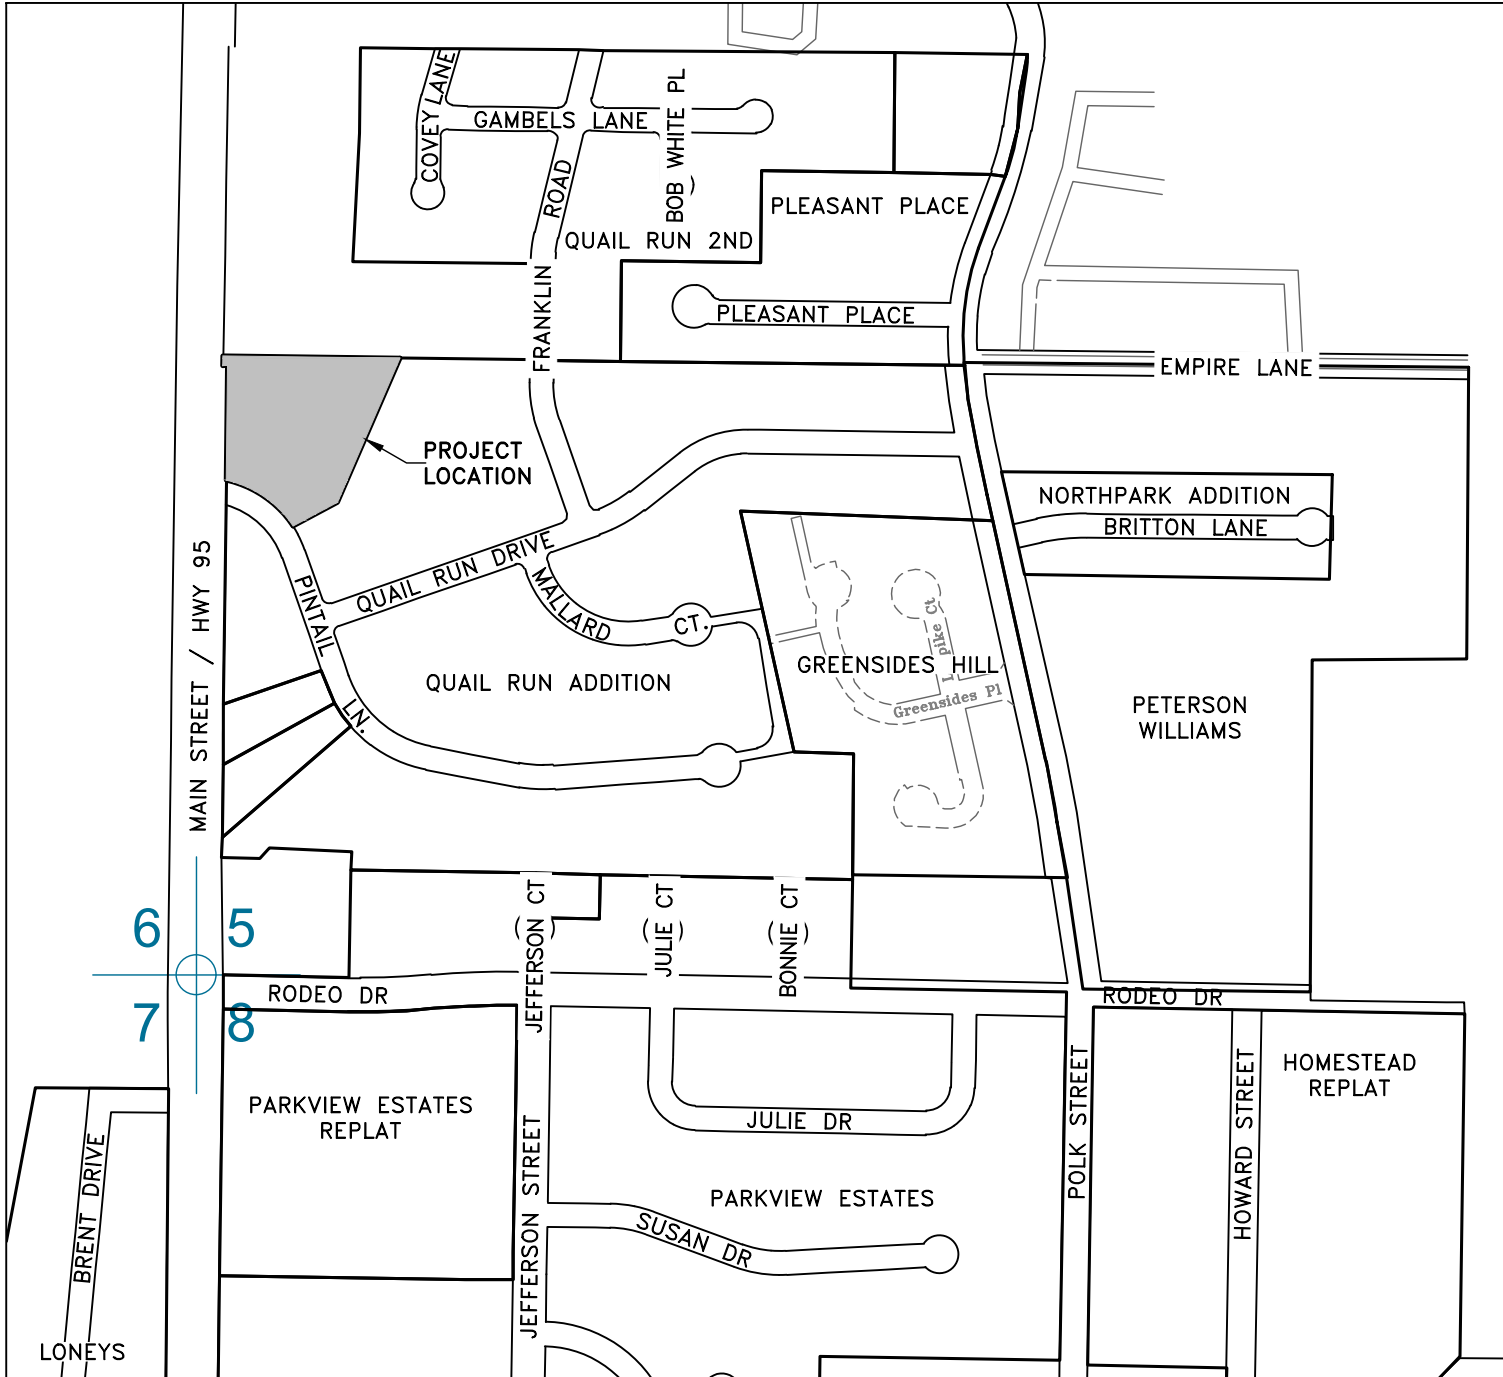

VICINITY MAP

SURVEYOR'S CERTIFICATE

I, Michael E. Dahlin, P.L.S. #17534, State of Idaho, hereby certify that the above platted and described property represents a survey performed by me or under my supervision in accordance with the laws of the State of Idaho, and that the streets, lots, distances, and monuments have been measured and located as shown thereon.
The interior monuments will be set in accordance with Idaho Code 50-1303, on or before 7-01-2025, as referenced on the plat and approved by the City of Moscow.
Witness my hand and seal this _____ day of _____, 2024.




Michael E. Dahlin, PLS #17534

PRELIMINARY
NOT FOR
RECORDING

Replat of Lots 12 & 13 of Block 3
of Quail Run Addition to the City of Moscow
Latah County, Idaho

Drafted by:	SW
Checked by:	MED
File Name:	4643 Replat
Tab:	Sign
Plot Style	Default.ctb
Project:	4643-04-23
Date:	8/20/24

Section 5, T39N, R5W, BM

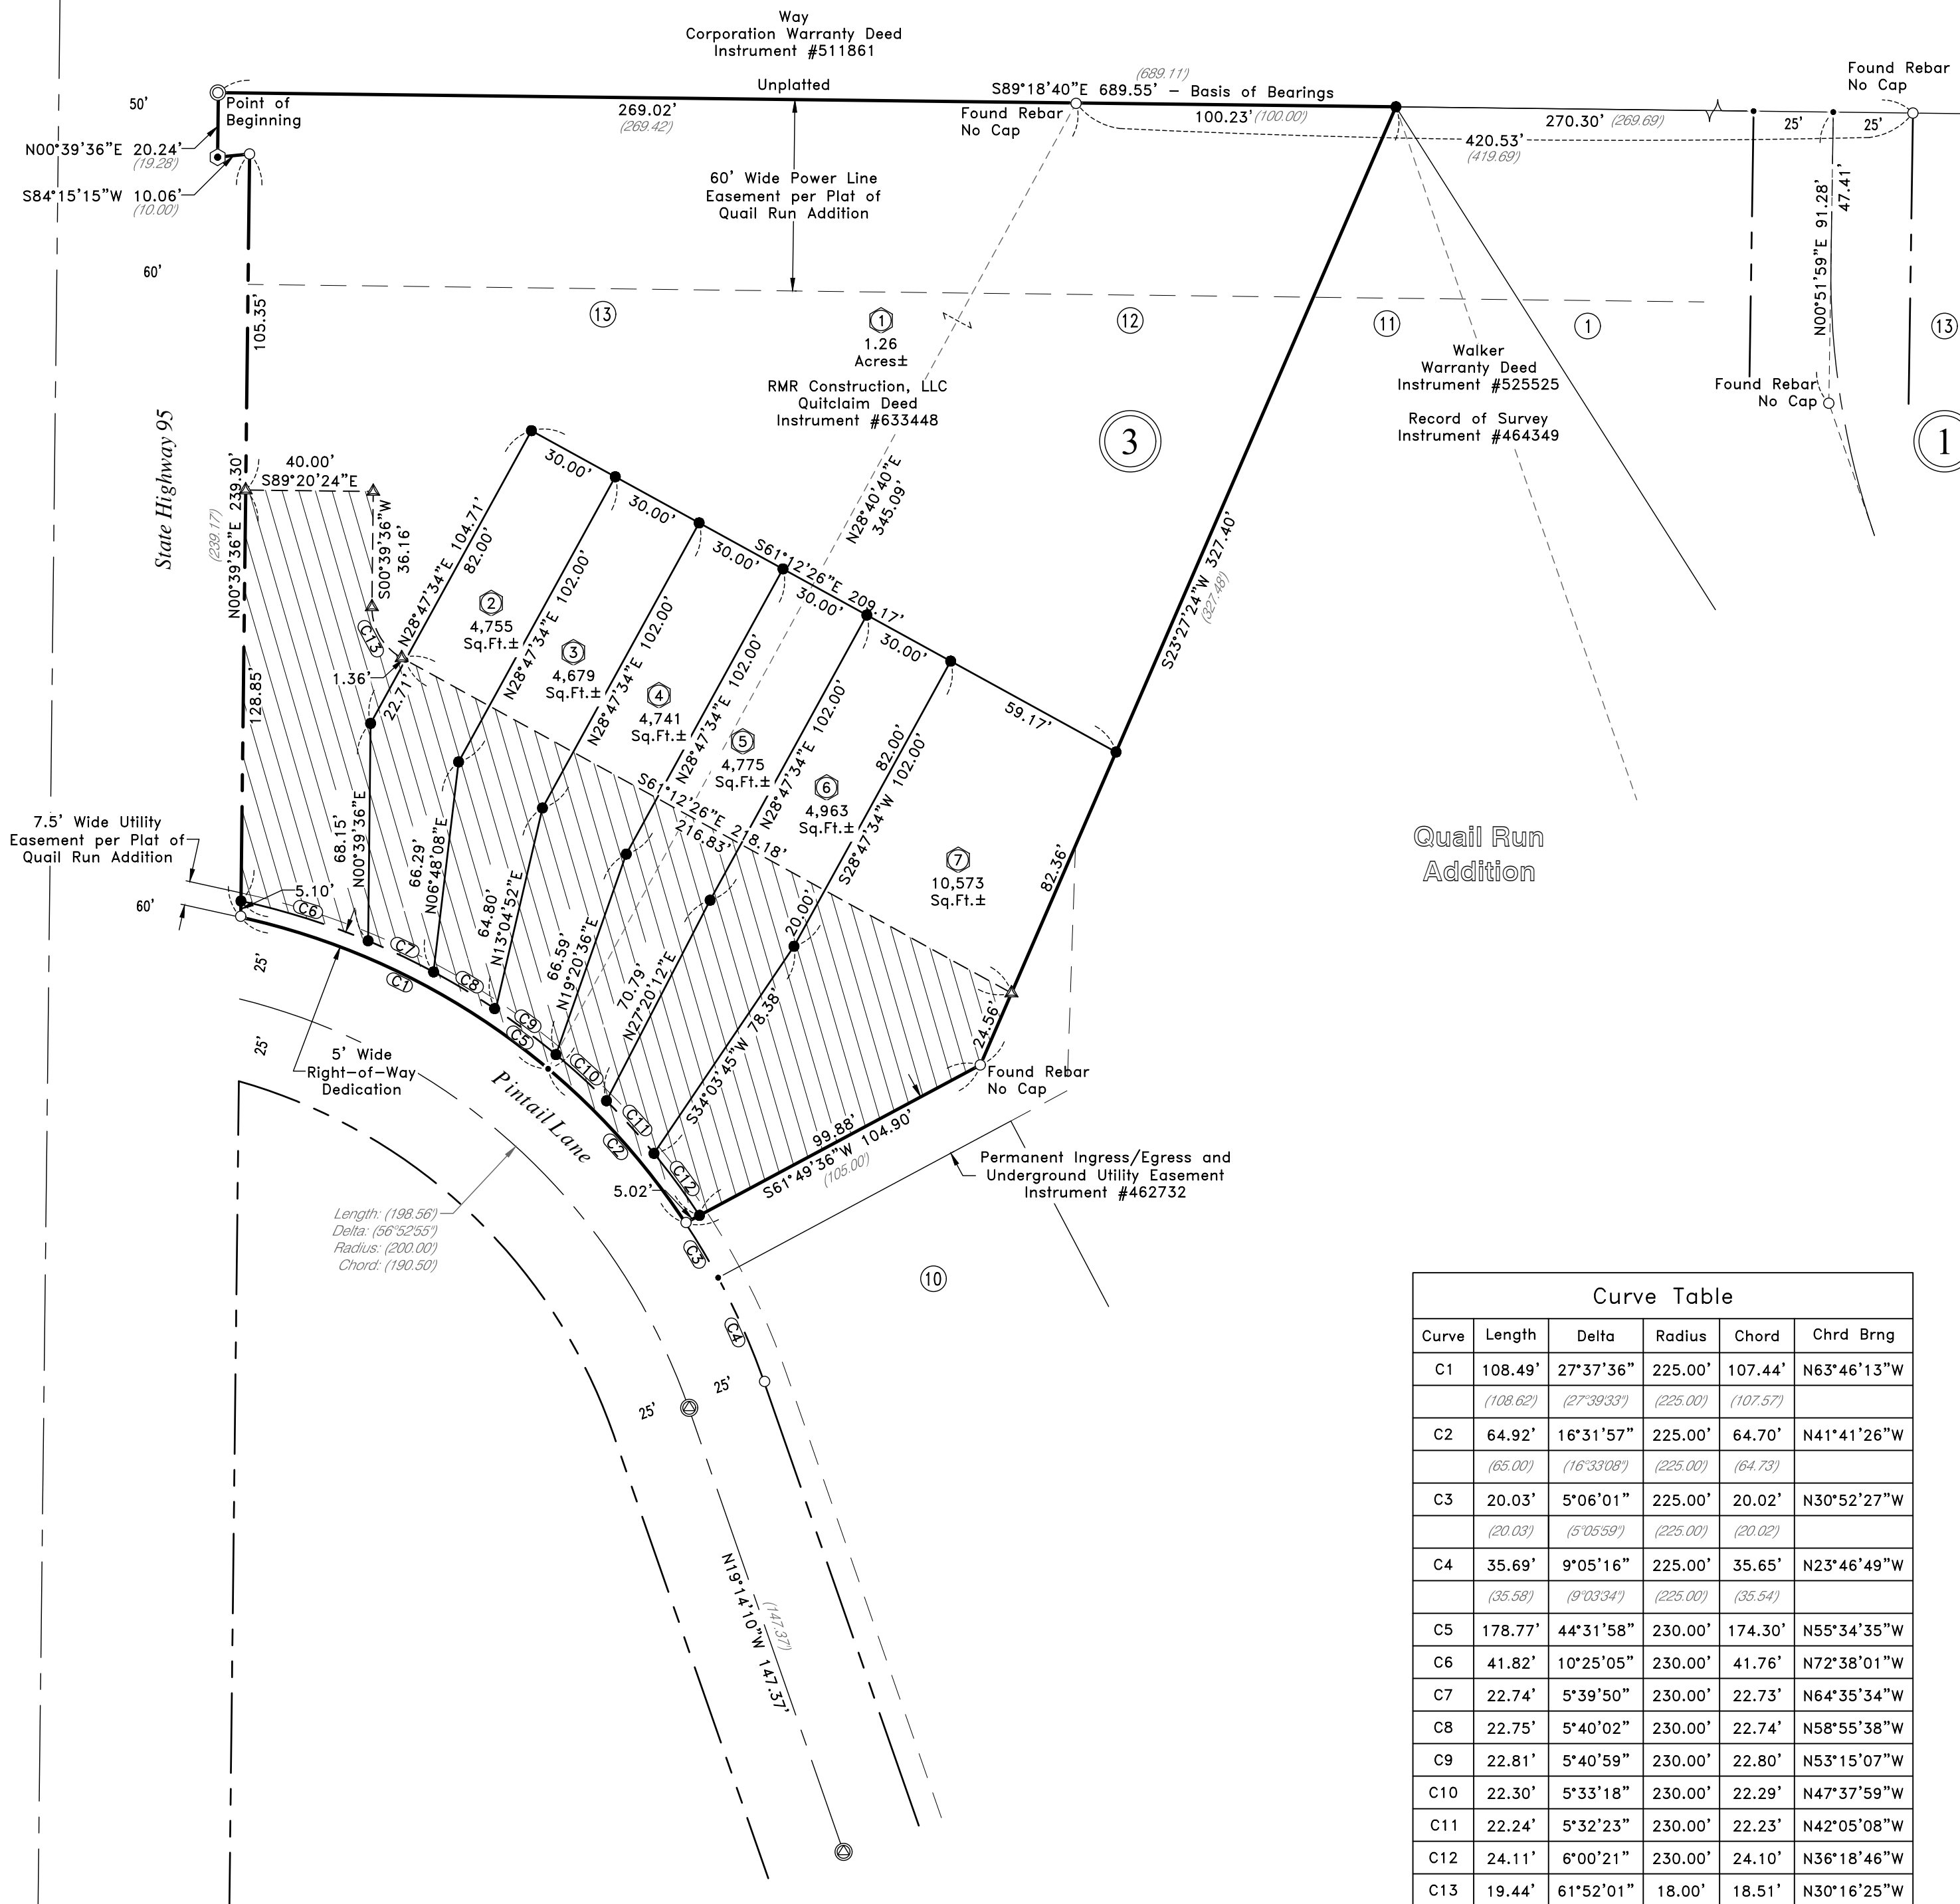

Survey References:

1. Plat of Quail Run Addition to the City of Moscow, Instrument #414835, by L. Hodge PE/LS #3003.
2. Permanent Ingress/Egress and Underground Utilities Easement, Instrument #462732.
3. Record of Survey, Instrument #464349, by L. Hodge PE/LS #3003.
4. Corporation Warranty Deed, Instrument #511861, United Guaranty Residential Insurance Company to Walker.
5. Warranty Deed, Instrument #525525, Friendshuh to Walker.
6. Quitclaim Deed, Instrument #633448 Smisek to RMR Construction, LLC.

Basis of Bearings

The Basis of Bearings for this survey is identical to the Idaho Coordinate System, West Zone, NAD 83 as shown between the found northwest corner of Quail Run Addition and the found northwest corner of Block 1 said Quail Run Addition, said bearing being S89°18'40"E.


Surveyor Narrative

1. The purpose of this survey was to locate, monument and map the boundaries of Lots 12 and 13 of Block 3 of Quail Run Addition, Instrument #464349, and to Replat said Lots into 7 new Lots, as shown hereon.
2. The north line of Quail Run Addition was located to establish the Basis of Bearings and primary boundary control. Lots 1 and 2 of Block 3 of Quail Run Addition were rotated to project basis and located accordingly.

Legend

- Set 5/8" Diameter Rebar w/Aluminum Cap Stamped "PLS 17534"
- ▲ Set 1/2" Diameter Rebar w/Plastic Cap Stamped "Easement PLS 17534"
- ⊙ Found Aluminum Cap Centerline Monument Stamped "Hodge 3003" in Case
- ⊙ Found ITD Brass Cap Right-of-Way Monument
- ⊙ Found 2" Diameter Iron Pipe
- Found 5/8" Diameter Rebar w/ Plastic Cap Stamped "Hodge 3003" or as Described
- Calculated Position
- Ⓢ Curve Data - See Curve Table
- ① Lot Number - This Replatting
- Ⓢ Quail Run Block Number
- ① Quail Run Lot Number
- (100) Record Data - Per Quail Run Addition
- Replat Boundary Line
- Lot Boundary Line - This Replatting
- Existing Lot/Parcel Boundary Line
- - - Original Quail Run Lot Line, No Longer Parcel Boundary
- Centerline
- Right-of-Way
- ▨ Public Access and Utility Easement This Replatting
- - - Existing Easement

Curve Table					
Curve	Length	Delta	Radius	Chord	Chrd Brng
C1	108.49' (108.62')	27°37'36" (27°39'33')	225.00' (225.00')	107.44' (107.57')	N63°46'13"W
C2	64.92' (65.00')	16°31'57" (16°33'08')	225.00' (225.00')	64.70' (64.73')	N41°41'26"W
C3	20.03' (20.03')	5°06'01" (5°05'59')	225.00' (225.00')	20.02' (20.02')	N30°52'27"W
C4	35.69' (35.58')	9°05'16" (9°03'34')	225.00' (225.00')	35.65' (35.54')	N23°46'49"W
C5	178.77'	44°31'58"	230.00'	174.30'	N55°34'35"W
C6	41.82'	10°25'05"	230.00'	41.76'	N72°38'01"W
C7	22.74'	5°39'50"	230.00'	22.73'	N64°35'34"W
C8	22.75'	5°40'02"	230.00'	22.74'	N58°55'38"W
C9	22.81'	5°40'59"	230.00'	22.80'	N53°15'07"W
C10	22.30'	5°33'18"	230.00'	22.29'	N47°37'59"W
C11	22.24'	5°32'23"	230.00'	22.23'	N42°05'08"W
C12	24.11'	6°00'21"	230.00'	24.10'	N36°18'46"W
C13	19.44'	61°52'01"	18.00'	18.51'	N30°16'25"W

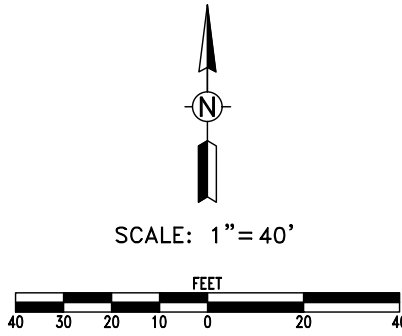

NO. _____ AT THE REQUEST OF: _____
DATE & HOUR: _____ M.
JULIE FRY
LATAH COUNTY RECORDER
FEE \$ _____ BY _____

P.O. Box 8728
405 S. Washington Street
Moscow, ID 83843-8728
(208) 882-3520

RIM ROCK CONSULTING, INC.
Land Surveying
Site Mapping
Photogrammetry

120 WEST 23rd STREET, SUITE 200, MOSCOW, IDAHO 83843-8888 (208) 882-3529 www.rimrockconsulting.com

PRELIMINARY
PROFESSIONAL LAND SURVEYOR
LICENSED SURVEYOR
17534
STATE OF IDAHO
MICHAEL E. DRYDEN

Replat of Lots 12 & 13 of Block 3
of Quail Run Addition to the City of Moscow
Latah County, Idaho

Drafted by: SW
Checked by: MED
File Name: 4643 Replat
Tab: Layout
Plot Style: Default.ctb
Project: 4643-04-23
Date: 8/20/24

Moscow City Council



Regular Meeting ~Minutes~

www.ci.moscow.id.us

Laurie M. Hopkins
City Clerk

208.883.7015

Monday
November 6, 2023

7:00 PM

Council Chambers
206 E. Third St.

The meeting was called to order at 7:00 p.m.

PRESENT: Mayor Art Bettge, Drew Davis, Sandra Kelly, Maureen Laflin, Hailey Lewis, Julia Parker, Gina Taruscio

STAFF: Bill Belknap, Mia Bautista, Cody Riddle, David Schott, Mike Ray, Bob Buvel, Laura Perrigo, Laurie M. Hopkins

PLEDGE OF ALLEGIANCE

In celebration of Day of the Girl on October 11, girl scouts from around the area led the Pledge of Allegiance.

PROCLAMATION

Veterans Day Proclamation

Mayor Bettge read the Veterans Day proclamation.

CONSENT AGENDA

1. All Consent Items (ACTION ITEM)

A. Approval of Moscow City Council October 16, 2023 Minutes - Laurie M. Hopkins

B. Personnel Policy Updates Resolution - Bonnie Dennler

This resolution is to amend and repeal sections within Chapters 5, 7 & 8 of the City of Moscow Personnel Policies as previously approved through Resolution 2022-30. Amendments are based on feedback from the Employee Advisory Committee, as well as to align these policies with current practice. This was reviewed by the Administrative Committee on October 23, 2023 and recommended for approval.

ACTION: Approve the proposed resolution to amend and repeal sections within Chapters 5, 7 & 8 of the City of Moscow Personnel Policies.

Parker moved and Laflin seconded to approve the consent agenda as presented. Roll Call Vote: Ayes: Unanimous. Nays: None. Abstentions: None. Motion carried.

REGULAR AGENDA

2. Mayors Appointments (ACTION ITEM)

Mayor Bettge presented to the City Council for consideration the appointment of Juan Albaitero to the Fair & Affordable Housing Commission and Phillip Blankenship and JT Manning to the Farmers Market Commission. Kelly moved and Taruscio seconded approval of the appointments. Roll Call Vote: Ayes: Unanimous. Nays: None. Abstentions: None. Motion carried.

Albaitero said he has been in Moscow for five years with plans as his forever home. He sees the growth of town and is excited to help.

JT Manning said has been in Moscow since 2004 and is excited to be part of one of his favorite things about of Moscow, the Farmers Market.

3. Public Comment and Mayor's Response Period (limit 15 minutes)

Riya Kumar, (Moscow) is part of XR Palouse, the local chapter of Extinction Rebellion. She recognizes Moscow is in a state of climate and ecological crisis. She believes it is long overdue that Moscow declare a climate and ecological emergency. Pave the way for more adequate address the climate emergency and treat things as severely as they are.

Nick Koenig (Moscow) is also here in the hopes of engaging in conversations. He asked that all developments go through the Sustainable Environment Commission and to change the name of the commission to Sustainable Environment and Climate Commission. XR will be rolling out a call and declaration and rally for community feedback. He wants Moscow to be the first city in Idaho to declare a climate emergency.

Brandon Johnson (Latah Sanitation Inc) said they have established some new programs for rate payors and installing a new scale at the transfer station. The new scale provides separate in/out weighing.

4. Moscow Farmers Market Halloween Costume Contest Presentation

Perrigo said this is the fourth annual contest and had six categories for entries. Categories included sprout, sprout group, junior, adult, pair/duo/couple and group/family. There were 55 entries and 89 participants. They collaborated with Tack and Photography for the photos.

5. Citizen Commission Report – Moscow Tree Commission – David Schott / Ellis Eifert

David Schott introduced Ellis Eifert, chair of the Moscow Tree Commission. Eifert. Eifert provided photos of the commission members and shared the mission statement, structure and duties. The past year the Commission held an Arbor Day Celebration at the Moscow Public Library and the annual seedling giveaway. The City received the 30th Tree City USA award and the 22nd Growth Award. The Commission also provided two articles for the utility billing newsletter and launched the Heritage Tree Program.

6. Public Hearing: Replat of Lot 12 and Lot 13, Block 3 of the Quail Run Addition (ACTION ITEM) - Mike Ray

The applicant, RMR Construction LLC, is proposing to subdivide a 2.08-acre property generally located at the northeast corner of Highway 95 and Pintail Lane to create seven (7) lots with an average lot size of 12,931 square feet, referred to as the Replat of Lot 12 and Lot 13, Block 3 of the Quail Run Addition. The Planning and Zoning Commission conducted a public hearing on this matter on September 27, 2023 and recommended approval of the proposed preliminary plat with no conditions.

PROPOSED ACTIONS:

1. After conducting the public hearing and upon consideration of testimony received, approve the preliminary plat with no conditions; or approve the preliminary plat with conditions; or reject the preliminary plat; or take other such action deemed appropriate.
2. In accordance with the decision upon the preliminary plat, adopt the Planning and Zoning Commission's Reasoned Statement of Relevant Criteria; or direct Staff to prepare a Reasoned Statement of Relevant Criteria for the Council's consideration at a future meeting.

Mayor Bettge opened the public hearing. Ray introduced the item by providing details regarding the

Comprehensive Plan, zoning, utilities and terrain.

Parker read in the packet that citizens are concerned about traffic from Pintail onto Highway 95. Ray stated 5 additional lots would not rise to the level of a traffic impact study but Idaho Transportation Department (ITD) would determine that since it ties into the highway. ITD did not have any comments. Belknap added site distance is adequate and no concerns have been brought forward. Staff could speak with ITD about low scale mitigation but the intersection won't have enough volume to warrant a signal.

Scott Becker (Hodge and Associates) said they have looked at this property for three years and this seems to be the best use of an infill lot. He quickly looked and found only one accident in the last five years at the intersection.

Mayor Bettge asked for any public testimony. Hearing none, he closed the public hearing at 7:58 p.m.

Lewis said she appreciates infill being developed and moved to approve the preliminary plat with no conditions. Taruscio seconded the motion. Roll Call Vote: Ayes: Unanimous. Nays: None. Abstentions: None. Motion carried.

Lewis moved to adopt the Planning and Zoning Commission's Reasoned Statement of Relevant Criteria. Taruscio seconded. Roll Call Vote: Ayes: Unanimous. Nays: None. Abstentions: None. Motion carried.

7. South US95 Sewer Water Extension Change Order (ACTION ITEM) - Bob Buvel

On August 2nd, 2021, the City Council Approved the Award of the South US95 Sewer Water Extension Contract to M.L. Albright & Sons in the amount of \$1,208,190.40, and authorized staff approval of construction change orders in an amount not to exceed 10% of the contract amount. During construction, three total change orders were requested by the contractor and staff. The first two change orders were within the 10% range authorized by the City Council when the contract award was approved. However, the third change order would exceed that authority limit and is being presented to the Council for approval. After the execution of all of the change orders, the project expenditure amount would increase from \$1,208,190.40 to \$1,724,593.00, or a 42% increase due to unforeseen construction conditions encountered in the project. This item was reviewed by the Administrative Committee on October 23, 2023, and recommended for approval.

PROPOSED ACTIONS: Approve change order #3 with M.L. Albrights & Sons, Inc. in amount of \$402,696.10; or take other action deemed appropriate.

Buvel introduced the item as written above and provided details on the change orders. A layer of fine sand and water was on top of the bedrock. As excavation occurred, the water and sand layer would fall into the trench and undermined the above soil causing cave-ins.

Davis asked about drilling bore samples prior to bidding and using them on projects in the future. Belknap responded to the question and added this is an unusual project as most utilities are 8 feet below and not 20 feet but feel this is a fair resolution to the project.

Lewis moved and Laflin seconded to approve change order #3 with M.L. Albrights & Sons, Inc. in amount of \$402,696.10. Roll Call Vote: Ayes: Unanimous. Nays: None. Abstentions: None. Motion carried.

8. ARPA Allocation Amendment Resolution (ACTION ITEM) - Bill Belknap

President Biden signed the \$1.9 trillion American Rescue Plan Act (HR 1319) (hereinafter "ARPA") into law on March 11, 2021. The measure provides fiscal assistance to state and local governments in need of relief due to the COVID-19 pandemic. The City of Moscow, as a non-entitlement unit of

government (population less than 50,000) was allocated a total of \$5,528,399. The City Council passed Resolution 2021-25, directing the use of the City's ARPA funds for business and non-profit assistance grants, assistance with affordable housing, and stormwater and water infrastructure improvements. On April 1, 2022, the United States Department of the Treasury issued the Final Rule of the Coronavirus State and Local Fiscal Recovery Funds which provided the ability for fund recipients to elect a "standard allowance" of up to \$10 million to spend on governmental services through the period of performance. The City has determined that the Water Capital Fund has the ability to fund necessary water system capital improvements and has determined there are other governmental services in greater financial need, including the construction of additional City shop facilities necessary to meet the demand for increased essential public services. Staff has prepared a Resolution amending the prior ARPA fund allocations to reallocate approximately \$3.7 Million to the General Fund to fund general governmental services through the performance period. This item was reviewed and recommended for approval by the Administrative Committee at their October 23rd meeting.

PROPOSED ACTIONS: Approve the proposed Resolution providing for a reallocation of the City's ARPA funding; or take other action deemed appropriate.

Belknap introduced the item as written above. The existing City shop was constructed in 1968 and is in poor condition and the building's systems are at or beyond their useful life expectancy. As the City's maintenance functions and fleet have grown over the past several decades, the building has reached a point of functional obsolescence. The current Shop is approximately 21,500 SF and the 2016 Study recommended 76,868 SF for the existing uses. The building does not have adequate restrooms, or safe working spaces, and does not provide a professional work environment. The Shop facility is key to the delivery of all of the City's essential services. During the 2017 and 2019 flooding events, floodwaters entered and flowed through the building. Belknap provided a building design concept from 2016 which would phase improvements over time. In 2021, staff determined what would be needed for a new fleet facility and illustrations were provided. The main entrance would move to Polk Street so traffic would be removed from the residential area on Van Buren Street.

ARPA Funds are required to be obligated by the end of 2024 and expended by the end of 2026. The design services were approved within the FY2024 budget and the City recently issued an RFQ for design services. The project cost is estimated at \$5 Million and anticipated that the project can be designed, bid, and contracted by the end of 2024. Construction would occur in 2025 with closeout prior to the end of 2026.

Lewis confirmed this would be the final monies from ARPA with the exception of a little in the affordable housing line item. In answer to a question posed by Lewis regarding the direct loss of revenue during the pandemic, Belknap said a cursory review at that time did not identify enough to justify the work it would take to demonstrate the need. Taruscio appreciates the building design is thought out. Laflin remembers the tour of the shop when first on the Council and pictures from the flood and is fully in support of funding this project. Parker appreciates the inhouse vehicle maintenance saving the City money and that it is ARPA one time money. She also mentioned some discussion of this property being affordable housing but thought remediation of fuels would make that not possible. Belknap said the replacement investment would be too great and not fundable. There are six other buildings and the fuel island on the property. A bond for a shop would be difficult and to accumulate monies would take approximately 30 years of savings.

Taruscio moved to approve the proposed Resolution providing for a reallocation of the City's ARPA funding. Laflin seconded Roll Call Vote: Ayes: Five (5). Nays: None. Abstentions: One(Davis). Motion carried.

REPORTS

City Council

SMART Transit – Lewis said they are talking about cobranding with Joe Vandal to promote use by students.

Mayor

Mayor Bettge said he presented the Orchid Awards; toured the airport terminal where interior walls are being constructed; the airport received funding for the west wing and are adding it to the current construction, which means the completion date is extended.


ADJOURN

It was moved, seconded and mutually agreed upon to adjourn at 8:48 p.m.



Arthur D. Bettge, Mayor

ATTEST:



Laurie M. Hopkins, City Clerk



**BEFORE THE CITY COUNCIL
OF THE CITY OF MOSCOW, COUNTY OF LATAH,
STATE OF IDAHO**

REASONED STATEMENT OF RELEVANT CRITERIA AND STANDARDS

REASONED STATEMENT OF RELEVANT CRITERIA AND STANDARDS REGARDING A REQUEST FOR A PRELIMINARY SUBDIVISION PLAT OF A TWO POINT ZERO EIGHT (2.08) ACRE AREA OF LAND LOCATED AT THE NORTHEAST CORNER OF HIGHWAY 95 AND PINTAIL LANE AND LEGALLY DESCRIBED AS LOT 12 AND LOT 13, BLOCK 3 OF THE QUAIL RUN ADDITION TO THE CITY OF MOSCOW, IDAHO.

WHEREAS, the applicant filed an application for a Preliminary Subdivision Plat on August 16, 2023; and

WHEREAS, this matter came before the Moscow Planning and Zoning Commission during a duly noticed public hearing on September 27, 2023; and

WHEREAS, this matter came before the Moscow City Council during a duly noticed public hearing on November 6, 2023; and

WHEREAS, having reviewed the application, including all exhibits entered, and having considered the issues presented by the applicant and the opponents:

THE CITY COUNCIL OF THE CITY OF MOSCOW, IDAHO, AFTER DUE DELIBERATION AND CONSIDERATION, HEREBY CONCLUDES:

I. RELEVANT FACTS AND CONCLUSIONS

1. The City Council considered the request pursuant to the City of Moscow 2019 Comprehensive Plan, City of Moscow Zoning Ordinance, the Local Land Use Planning Act, and other applicable development regulations.
2. The subject property is a two point zero eight (2.08) acre area of land located at the northeast corner of Highway 95 and Pintail Lane and legally described as Lot 12 and Lot 13, Block 3 of the Quail Run Addition to the City of Moscow.
3. The subject property is currently undeveloped and comprised of two previously platted lots within the Quail Run subdivision which was approved in 1995. The subject property has property frontage on Pintail Lane and Highway 95, but is accessed via a shared driveway from Pintail Lane. North, east, and south of the subject property is developed with a combination of single family and two-family dwellings. Fire Station 3 is located on the south side of Pintail Lane, to the south of the subject property. Across Highway 95 to the west is a single-family dwelling and junk yard and towing business.
4. The subject property contains areas of extreme sloping topography with slopes up to 45% as the property gains elevation to the northeast. There are no drainage ways or natural features that have been identified upon the subject property.
5. The subject property is currently designated as Auto-Urban Residential (AU-R). AU-R designated areas,

“designated areas contain predominantly single-family detached homes on lots ranging from 7,000 to 11,000 square feet in size and are more isolated from surrounding uses which may require residents to rely more on automobile transportation. This designation includes those areas generally anticipated to be developed for low- to moderate-density residential uses at densities between three to six units per acre which could include a mix of detached single-family, twinhome, and townhome residential dwellings. Appropriate current zoning for Auto-Urban Residential designated areas include Low Density Residential (R-1), Moderate Density Single Family Residential (R-2) and Medium Density Residential (R-3) in order to include a mixture of attached and detached dwellings where appropriate.”

6. All surrounding land is currently designated as Auto-Urban Residential, with the exception of the property across Highway 95 to the west which is designated as Auto-Urban Commercial.
7. The subject property is currently designated as the Medium Density Residential (R-3) Zoning District. A large portion of the properties on Pintail Lane are also located within the R-3 Zone until they transition to the Moderate Density Residential (R-2) Zone to the east. Properties on the west side of Highway 95 are designated as Motor Business (MB) and Agriculture Forestry (AF).
8. The Medium Density Residential (R-3) Zoning District provides for an increase over the density allowed by the R-2 zoning district by permitting different types of housing construction. It is appropriate where activity levels are moderate, terrain permits construction of somewhat larger structures, and where public systems and neighborhood facilities can accommodate a greater intensity of land use as guided by the Comprehensive Plan.
9. Uses permitted within the R-3 Zone include single-family dwellings, two family dwellings, twinhomes, townhouses, market and community gardens, group and small child care facilities, and public parks and recreation facilities.
10. The applicant is proposing to subdivide the 2.08-acre property to create seven (7) lots ranging from 4,868 square feet to 1.27 acres in size, referred to as the Replat of Lot 12 and Lot 13, Block 3 of the Quail Run Addition. The proposal includes six (6) twinhome lots and one (1) single family lot.
11. Within the R-3 Zone, single family lots are required to have a minimum lot area of 6,000 square feet in size and a minimum lot width of 60 feet. Twinhome lots are required to have a 3,250 square foot minimum lot size and a 30-foot minimum lot width.
12. Water services are currently extended to the subject property from Pintail Lane. The property is considered developable in the City's Comprehensive Water System Plan dated January 2012. Engineering has determined that the existing system has adequate potable and fire flows to serve the proposed subdivision.
13. It is anticipated that under commonly observed household water use within the City (114 gallons per day per occupant) that the proposed development could be reasonably anticipated to use approximately 655,357 thousand gallons of water per year (20 du x 2.25 occupants/du x 114 gallons/occupant x 365 days/year = 655,357 thousand gallons/year).
14. Sanitary sewer is currently located within Pintail Lane and the proposed lots will connect to the existing sewer main. Engineering has determined that the system has adequate capacity to convey the additional flow from the development. The subject property is considered developable in the Comprehensive Sewer System Plan dated September 2011.
15. The storm sewer for the subdivision is proposed to be detained on-site and then conveyed to the existing storm sewer main within Pintail Lane. The stormwater system of the proposed

development will need to meet Moscow's Stormwater Runoff Control Standards which require the stormwater to be detained to the pre-development rate.

16. The subject property is located adjacent to Pintail Lane which is designated as a local neighborhood street and Highway 95 which is designated as a national highway. Current and proposed access to the proposed lots is via an existing shared driveway on an adjacent lot to the east which contains an access easement. The proposed lots are proposing to continue to utilize the shared driveway, and an access easement is proposed across all of the lots for the continuation of the shared access drive
17. Pintail Lane adjacent to the subject property is constructed to a local residential street standard which includes a 34-foot-wide roadway with two travel lanes and curbing, gutters, and tree lawns on both sides of the street, and a sidewalk on the west side of the street.
18. Highway 95 is constructed to a 30-foot-wide paved roadway with two 12-foot-wide northbound and southbound travel lanes. A designated right-hand turn lane northbound onto Pintail Lane currently exists, as well as gravel shoulders on both sides of the highway
19. The applicant conducted a neighborhood meeting with affected property owners within 600 feet of the subject property on August 10, 2023 to discuss the proposed preliminary plat.

BASED ON THE ABOVE RELEVANT FACTS AND CONCLUSIONS, THE CITY COUNCIL OF THE CITY OF MOSCOW HEREBY FINDS THE FOLLOWING RELEVANT CRITERIA AND STANDARDS:


II. RELEVANT CRITERIA AND STANDARDS

1. **The proposed subdivision is in conformance with all applicable City Code requirements.** The proposed preliminary plat is consistent with and in conformance with the requirements and provisions of the Medium Density Residential (R-3) Zoning District, including lot area, dimensions and other relevant provisions. The proposed preliminary plat is also in conformance with the general requirements of the Moscow Subdivision Ordinance including, but not limited to, the provision of the logical and orderly connection to the City's street network, public utilities, and the provision of public parkland.
2. **The proposed subdivision is in general conformance with the Comprehensive Plan.** The proposed preliminary plat is consistent with the City of Moscow Comprehensive Plan and provides for the logical and orderly infill development within an existing subdivision. The proposed lots sizes and densities are consistent with the Comprehensive Plan Land Use designation of Auto-Urban Residential.
3. **Public Services and utilities are available or can be made available and are adequate to accommodate the proposed subdivision.** The subject property has direct access to Pintail Lane which is a local neighborhood street and is near the intersection with Highway 95. Water and sewer services currently exist in Pintail Lane. The Engineering Department has determined that the existing system has adequate potable and fire flows and sewer capacity to serve the proposed subdivision.
4. **The proposed subdivision will not be detrimental to the public health, safety, or general welfare.** The proposed preliminary plat provides for infill development within an existing subdivision and will not be detrimental to the public health, safety, or general welfare.

III. DECISION

Based on the above Reasoned Statement of Relevant Criteria, the City Council of the City of Moscow approves the preliminary subdivision plat request for the two point zero eight (2.08) acre area of land located at the northeast corner of Highway 95 and Pintail Lane and legally described as Lot 12 and Lot 13, Block 3 of the Quail Run Addition with no conditions.

PASSED BY THE CITY COUNCIL OF THE CITY OF MOSCOW this 7th day of November, 2023.



Arthur D. Bettge, Mayor

Memo

To: Planning and Zoning Commission
From: Mike Ray, AICP - Planning Manager
Date: August 22, 2024
Re: Wildrose Court Final Plat and Final PUD Review

The Planning & Zoning Commission conducted a public hearing on March 27, 2024 to consider the request of Provvidenza, LLC for a Comprehensive Plan land use designation, zoning designation, preliminary subdivision plat, and preliminary planned unit development (PUD) for a 2.53-acre area of land generally located east of the current terminus of Wildrose Drive and south of Flomer Lane and referred to as Wildrose Court Addition. After considering public testimony and the relevant criteria and standards, the Planning and Zoning Commission recommended approval of the preliminary subdivision plat with five conditions, recommended approval of the preliminary PUD with one condition, and recommended approval of the Comprehensive Plan land use designation and zoning designation with no conditions.

City Council then conducted a public hearing on May 6, 2024 and approved the Wildrose Court Addition with the same conditions recommended by P&Z. The conditions were:

Preliminary Plat

1. The proposed subdivision shall be analyzed in the City's water system model to verify that the current design will have adequate potable and fire flow requirements, and if there are deficiencies the applicant shall be responsible for the construction of the improvements needed to adequately serve the subdivision.
2. The applicant shall gain approval of the Southeast Sewer District to accept Sanitary Sewer Water in a form acceptable to both the City and the District.
3. The applicant shall dedicate 10 feet of right-of-way along the Flomer Lane frontage of the subject property in order to accommodate the construction of a local street per City Standards in the future in the event it becomes necessary to do so.
4. The applicant shall be required to conduct a detailed stormwater discharge analysis to include any mitigation actions necessary to ensure that the stormwater facility shall have no downstream adverse impacts subject to the approval of the City Engineer.
5. The applicant shall extend the water main currently terminating at Lot 13 to the south to connect with the water main within Wildrose Court to improve water quality and redundancy in the subdivision.

PUD

1. In order to achieve the full 5% density bonus for landscaping, the applicant shall expand the landscape plan to include landscaping on individual lots and the entrance to the subdivision.

On August 13, 2024 the applicant submitted the final subdivision plat and final PUD to be reviewed by the Planning and Zoning Commission and City Council. Staff has reviewed the final plat and final PUD for conformance with City and State Code requirements as well as the conditions of approval and found both to be in conformance. Therefore, Staff recommends that the Commission recommend approval of the final plat and final PUD for Wildrose Court Addition to City Council with no conditions.



**CITY OF MOSCOW
COMMUNITY DEVELOPMENT**
Ph.: 208-883-7035
504 S. Washington Street
jfleischman@ci.moscow.id.us
mray@ci.moscow.id.us

For City Use Only			
Date Received		7/25/24	
Dept	Fee Type	Fees	Paid
CDV	Application Fee	\$474.00 plus \$28.50/lot	
Receipt Number		LUP2024-0026	

APPLICATION FOR FINAL SUBDIVISION PLAT

(Please type or print plainly with blue ink.)



APPLICANT:

Name: RON STREUTHERS & DAVE DAIL (PROVIDENZA, LLC) Phone: (208) 892-4339
(208) 310-0855
 Address: 1008 WARREN LN, MOSCOW, ID 83843 Email: ron@sonriseapartments.com
davedail.realtor@gmail.com

OWNER: (if other than applicant)

Name: _____ Phone: _____
 Address: _____ Email: _____

ENGINEER/SURVEYOR:

Name: SCOTT BECKER (P.E.) Phone: (208) 882-3520
 Address: 405 S. WASHINGTON ST, MOSCOW, ID 83843 Email: scott.becker@moscow.com

Primary point of contact (select one): Applicant ☐ Owner ☐ Engineer/Surveyor ☒

PROPERTY:

- Proposed Subdivision Name: WILDROSE COURT
- Address(es) or Parcel Number(s): RP35N05W167355A
- Legal Description: Please attach copy of full description.
- Gross Area of all land involved: 2.53 +/- acres, and/or _____ sq. ft.
- Total Net Area of land area, exclusive of proposed or existing public street and/or other public lands:
1.83 +/- acres, and/or _____ square feet.
- Total number of lots: 16 Average lot size: 3.972 ft²

SEWER AND WATER MAIN OVERSIZING REIMBURSEMENT POLICY:

Oversizing of utilities will not be eligible for reimbursement from the City unless a written request is submitted to the City Engineer prior to approval of the project construction drawings and a written approval of such request is issued by the City Engineer.

FINAL PLAT CHECKLIST:

All final plats, including the legal description of the exterior boundary, shall be prepared in accordance with the Idaho Code. Final plats shall be drawn to a scale no larger than 1"=100' unless pre-approved by the city engineer. The final plat drawing shall not be substantially different than the approved preliminary plat for the subdivision and shall contain the following information:

- _____ 1. Name of subdivision and its location by section, township, range, and county, with drawing scale, date of submission, and north arrow.
- _____ 2. Name, address, phone number, registration number and seal of the professional land surveyor preparing the plat, and name of subdivider and owners of property being platted.
- _____ 3. Boundary lines of property being platted including bearings, distances and curve data based on an accurate survey in the field closing within the tolerances prescribed by Idaho Code; lines of departure and owners of unplatted adjoining property; and lots, blocks and names of adjoining subdivisions. Adjoining subdivision lots shall be shown with dashed lines.
- _____ 4. Names and widths of all proposed streets; bearings, distances, and curve data of all street centerlines; location, width, purpose, and dimensions of easements; location and description of all property being dedicated for public use. All curves shall be described by central angle, radius, arc length, and chord bearing and distance.
- _____ 5. Location, name, and widths of adjacent street rights-of-way, the location and width of adjacent public easements, and the location and purpose of any adjacent property previously dedicated for public use.
- _____ 6. Lots and blocks with lots numbered consecutively within each block; bearings, distances, and curve data for each lot; the square footage of lots less than one acre in size or acreage of lots one acre or greater. Blocks shall be labeled consecutively. All curves shall be described by central angle, radius, arc length, and chord bearing and distance.
- _____ 7. Location and description of all monuments, including found monuments. If interior monuments are not set at the time the plat is recorded (as allowed by Idaho Code), include a statement indicating the date which they shall be set. Said date shall be approved by the City Engineer.
- _____ 8. Basis of bearing used to determine bearings shown on plat.
- _____ 9. Point of beginning of the subdivision with ties to the point of beginning from a minimum of two established corners of the Public Land Survey System (PLSS) in one or more of the sections containing the subdivision. List the recording numbers of the corner perpetuation and filing forms of the PLSS monuments. List horizontal coordinates for each PLSS monument and the point of beginning based on the Idaho Coordinate System West Zone. All coordinates values shall be grid coordinates based on the North American Datum of 1983 (NAD83) and specified as such.
- _____ 10. Street centerline monuments at each intersection, point of curvature, and point of tangency. Street monuments shall be constructed in accordance with City of Moscow standard specifications for street monuments. All other monuments shall be as prescribed by Idaho Code.
- _____ 11. Signed certificate by the owners of the land containing a correct legal description of the land, with the statement containing their intentions to include the same in the plat, and make a dedication of all

public rights-of-way, easements, and parkland. The owners' signatures upon the certificate shall be notarized upon the plat by an officer duly authorized to take acknowledgements. If the property being mortgaged, the signature of the mortgagee's representative is also required.

- ____ 12. Signed certificate by the land surveyor, stating that the plat is correct and accurate, the land survey of the platted property was performed by him/her or under his/her direct supervision, the monuments indicated on the plat have been located as described, and the surveying and platting was done in accordance with Idaho Code. The statement shall be accompanied by the seal of the registered professional land surveyor, signed and dated. The surveyor shall in every case have a valid certificate of registration with the Idaho Board of Registration of Professional Engineers and Professional Land Surveyors.
- ____ 13. Signed certificate by the City of Moscow Planning and Zoning Commission with date of approval.
- ____ 14. Certificate stating that the City Council has approved the plat and accepts all public dedications as shown thereon. The certificate shall be signed by the Mayor and attested to by the City Clerk.
- ____ 15. Certificate by the City Engineer that the plat conforms to the requirements of Title 50, Chapter 13, Idaho Code, and with the requirements of this chapter.
- ____ 16. Signed certification by the subdivider stating the City of Moscow has agreed in writing to supply water to all the lots in the subdivision from the municipal water system.
- ____ 17. Certificate signed and sealed by the Latah County Surveyor stating the plat and computations have been checked and the plat meets the requirements of Title 50, Chapter 13, Idaho Code.
- ____ 18. Certificate of satisfaction of the sanitary restrictions, to be endorsed by the Latah County Recorder at the time of filing if the sanitary restrictions have been satisfied according to Idaho Code, Section 50-1326.
- ____ 19. Certificate that taxes have been paid to date on the property to be signed by the Latah County Treasurer at the time of filing.
- ____ 20. Certificate of recording, to be signed by the Latah County Recorder at the time of filing.

The following items must be submitted with this application before it will be processed:

1. Application fees
2. One full-sized Final Plat Map and one electronic copy.

I understand this information is a public record and may be posted to a public website. I certify under penalty of perjury pursuant to the law of the State of Idaho that the foregoing is true and correct.



Signature of Applicant

7/25/24

Date

Signature of Property Owner (if different)

Date



NO. 625170
 AT THE REQUEST OF
Westhera Brooke Moore
 DATE & HOUR
8/12/2022 10:42 AM
 TONYA DODGE
 LATAH COUNTY RECORDER
 FEE \$ 12.00 BY: AK

QUITCLAIM DEED

FOR VALUE RECEIVED, PROVVIDENZA, LLC, an Idaho Limited Liability Company, the "Grantor," hereby conveys, remises, releases and forever quitclaims unto PROVVIDENZA, LLC, an Idaho Limited Liability Company, the "Grantee," whose current address is 1026 S. Harding St, Moscow, ID 83843, all present right, title and interest in the following described real property in the County of Latah, State of Idaho, to-wit:

A parcel of land located in the Northeast Quarter of the Southeast Quarter of Section 16, Township 39 North, Range 5 West, Boise Meridian, Latah County, Idaho described as follows:

Commencing at the northwest corner of the Southeast Quarter of Section 16; Thence along the north line thereof, S89°45'01"E, 1318.31 feet to the northwest corner of the Northeast Quarter of the Southeast Quarter of Section 16, said point also being the northeast corner of Ridgeview Estates 2nd Addition, Instrument #577638, Latah County Records, and the Point of Beginning:

Thence continuing along said north line, S89°45'01"E, 85.31 feet to the northwest corner of a parcel of land described in, Warranty Deed, Instrument #611335, Latah County Records; Thence leaving said north line, along the west line of said parcel S00°19'45"W, 115.00 feet to the southwest corner thereof; Thence along the west line of a parcel of land, defined in Record of Survey, Instrument #579637, Latah County Records, S00°19'45"W, 10.00 feet to a 5/8" diameter pin with a yellow plastic cap, stamped, "HEDCO, Inc. PE/LS 2102" set in said Record of Survey; Thence S06°42'42"E, 7.50 feet to a 1" diameter pipe; Thence N87°11'15"E, 139.31 feet to a 5/8" diameter pin with a yellow plastic cap, stamped, "HEDCO, Inc. PE/LS 2102" set in Record of Survey, Instrument #579637; Thence N00°19'09"E, 2.39 feet to an existing steel pin, with no cap; Thence N00°19'09"E, 7.61 feet to the southeast corner of a parcel of land described in, Warranty Deed, Instrument #611335; Thence along the east line thereof, N00°19'09"E, 115.00 feet to the north line of said Northeast Quarter of the Southeast

QUITCLAIM DEED - 1



Recieved 07-25-2024


Quarter; Thence along the north line thereof, S89°45'01"E, 85.21 feet to the northwest corner of a parcel of land described in, Warranty Deed, Instrument #515013, Latah County Records; Thence along the west line of said parcel of land, S00°20'53"W, 371.04 feet to the northeast corner of a parcel of land described in, Quitclaim Deed, Instrument #597733, Latah County Records; Thence along the north line of said parcel of land, S68°02'08"W, 111.46 feet, to the northeast corner of a parcel of land described in, Warranty Deed, Instrument #594645, Latah County Records; Thence along the north line of said parcel of land, N89°45'08"W, 70.00 feet, to the northeast corner of a parcel of land described in, Quitclaim Deed, Instrument #597618, Latah County Records; Thence along the north line of said parcel of land, S76°32'07"W, 141.49 feet, to the west line of the Northeast Quarter of the Southeast Quarter, and the east boundary line of Ridgeview Estates 2nd Addition; Thence along said common line, N00°20'53"E, 446.72 feet to the Point of Beginning.

TOGETHER WITH ALL tenements, hereditaments and appurtenances thereunto belonging.

TO HAVE AND TO HOLD the said premises, with their appurtenances unto the said Grantee, its heirs and assigns forever.

PROVVIDENZA, LLC


DATED: 8/4/22


DAVID P. DAIL, Member

DATED: 8-4-22


RONALD D. STRUTHERS, Member

DATED: 8-4-22



ANN STRUTHERS, Member

STATE OF Idaho)
: ss
County of Latah)

On this 4th day of August, 2022, DAVID P. DAIL, as a Member of Provvidenza, LLC, an Idaho Limited Liability Company, known to be the individual described in and who executed the within and foregoing instrument and acknowledged that they signed the same as their free and voluntary act and deed, for the uses and purposes therein mentioned.

GIVEN under my hand and official seal this 4th day of August, 2022.

(seal)




Lacen Workman
Notary Public
Residing at Garfield, WA
My commission expires 03/11/2025

STATE OF Idaho)
: ss
County of Latah)

On this 4th day of August, 2022, RONALD D. STRUTHERS, as a Member of Provvidenza, LLC, an Idaho Limited Liability Company, known to be the individual described in and who executed the within and foregoing instrument and acknowledged that they signed the same as their free and voluntary act and deed, for the uses and purposes therein mentioned.

GIVEN under my hand and official seal this 4th day of August, 2022.

(seal)



Lacen Workman
Notary Public
Residing at Garfield, WA
My commission expires 03/11/2025

QUITCLAIM DEED - 3




STATE OF Idaho)
)
County of Latah) : ss

On this 4th day of August, 2022, ANN STRUTHERS, as a Member of Provvidenza, LLC, an Idaho Limited Liability Company, known to be the individual described in and who executed the within and foregoing instrument and acknowledged that they signed the same as their free and voluntary act and deed, for the uses and purposes therein mentioned.

GIVEN under my hand and official seal this 4th day of August, 2022.

(seal)



Lacen Workman
Notary Public
Residing at Garfield, WA
My commission expires 02/11/2025

QUITCLAIM DEED - 4



Recieved 07-25-2024

Section 16, T39N, R5W, BM

Legal Description

A parcel of land located in the Northeast Quarter of the Southeast Quarter of Section 16, Township 39 North, Range 5 West, Boise Meridian, Latah County, Idaho described as follows:

Commencing at the northwest corner of the Southeast Quarter of Section 16; Thence along the north line thereof, S89°45'01"E, 1318.31 feet to the northwest corner of the Northeast Quarter of the Southeast Quarter of Section 16, said point also being the northeast corner of Ridgeview Estates 2nd Addition, Instrument #577638, Latah County Records, and the **Point of Beginning**:

Thence continuing along said north line, S89°45'01"E, 85.31 feet to the northwest corner of a parcel of land described in, Warranty Deed, Instrument #611335, Latah County Records;
Thence leaving said north line, along the west line of said parcel S00°19'45"W, 115.00 feet to the southwest corner thereof;
Thence along the west line of a parcel of land, defined in Record of Survey, Instrument #579637, Latah County Records, S00°19'45"W, 10.00 feet to a 5/8" diameter pin with a yellow plastic cap, stamped, "HEDCO, Inc. PE/LS 2102" set in said Record of Survey;
Thence S06°42'42"E, 7.50 feet to a 1" diameter pipe;
Thence along the south line thereof, N87°11'15"E, 139.31 feet to a 5/8" diameter pin with a yellow plastic cap, stamped, "HEDCO, Inc. PE/LS 2102" set in Record of Survey, Instrument #579637;
Thence N00°19'09"E, 2.39 feet to an existing steel pin, with no cap;
Thence N00°19'09"E, 7.61 feet to the southeast corner of a parcel of land described in, Warranty Deed, Instrument #611335;
Thence along the east line thereof, N00°19'09"E, 115.00 feet to the north line of said Northeast Quarter of the Southeast Quarter;
Thence along the north line thereof, S89°45'01"E, 85.21 feet to the northwest corner of a parcel of land described in, Warranty Deed, Instrument #515013, Latah County Records;
Thence along the west line of said parcel of land, S00°20'53"W, 371.04 feet to the northeast corner of a parcel of land described in, Quitclaim Deed, Instrument #597733, Latah County Records;
Thence along the north line of said parcel of land, S68°02'08"W, 111.46 feet to the northeast corner of a parcel of land described in, Warranty Deed, Instrument #594645, Latah County Records;
Thence along the north line of said parcel of land, N89°45'08"W, 70.00 feet to the northeast corner of a parcel of land described in, Quitclaim Deed, Instrument #597618, Latah County Records;
Thence along the north line of said parcel of land, S76°32'07"W, 141.49 feet to the west line of the Northeast Quarter of the Southeast Quarter, and the east boundary line of Ridgeview Estates 2nd Addition;
Thence along said common line, N00°20'53"E, 446.72 feet to the **Point of Beginning**.

Parcel contains 2.53 acres, more or less.

Together With: A 15.00' wide access and utility easement, described in Easement Agreement, Instrument #625212, Latah County Records.

Certificate of Owner

Know all persons by these presents, that Provvidenza LLC, owner of the land and premises described above, has caused said land to be subdivided and platted as shown hereon as an addition to the City of Moscow, Latah County, Idaho, to be known as the Wildrose Court PUD to the City of Moscow, Latah County, Idaho The easements as shown on this plat are hereby reserved for public utility and access purposes as designated hereon and no permanent structures are to be erected within the lines of said easements. The owner certifies that all lots within this plat will be eligible to receive water service from an existing water system, be the water system municipal, a water district, a public utility subject to the regulation of the Idaho public utilities commission, or a mutual or nonprofit water company, and the existing water distribution system has agreed in writing to serve all of the lots in the subdivision (Section 50-1334, Idaho Code). The owner does herewith dedicate to the public, the sanitary sewer and water mains within the private roadway, shown hereon as Wildrose Circle, Tract D for pathway purposes, the right-of-way along Flomer Ln as shown hereon. Said Roadway Area, Tract B, and Open Areas, Tract A and Tract E are to be privately maintained.
In witness thereof, the undersigned has set his hand and seal.

Ron Struthers _____ Date _____
Representative, Provvidenza, LLC


Acknowledgment

STATE OF IDAHO }
COUNTY OF LATAH } S.S.
On this ____ day of _____, 2024, before me, personally appeared, Ron Struthers known or identified to me to be the person whose name is subscribed to the foregoing instrument and that they executed the same.

In witness whereof, I have hereunto set my hand and affixed my official seal the day and year in this certificate first above written.

In witness whereof, I hereunto set my hand and official seal.

Notary Public, _____
Residing in _____
My Commission Expires _____



Approvals

Moscow Planning and Zoning Commission

Approval of this plat by the City of Moscow certifies agreement to allow connection of the above described property to the municipal water system and satisfies Section 50-1334, Idaho Code. Examined and approved by action of the Moscow Planning and Zoning Commission at a regular meeting with a quorum present this ____ day of _____, 2024.

Chairman, Planning and Zoning Commission

Moscow City Council

Examined and approved by action of the Moscow City Council at a regular meeting with a quorum present this ____ day of _____ 2024.
Dedication of all public streets, easements, and parkland described on this plat is hereby accepted in accordance with Section 50-1313, Idaho Code.

Clerk Mayor, City of Moscow

City Engineer, City of Moscow

Examined and approved by the City Engineer this ____ day of _____ 2024.

City Engineer, City of Moscow

Latah County Surveyor

Examined and approved by the Latah County Surveyor this ____ day of _____ 2024.

Latah County Surveyor

Latah County Treasurer

I hereby certify that taxes and assessments on property shown hereon have been paid for 2024 and preceding years as of this ____ day of _____ 2024.

Latah County Treasurer

Public Health - Idaho North Central Health District


Sanitary restrictions as required by Idaho Code, Title 50, Chapter 13 have been satisfied. Sanitary restrictions may be reimposed, in accordance with Section 50-1326, Idaho Code, by the issuance of a certificate of disapproval.

Public Health - Idaho North Central District, _____ Date _____
Senior Environmental Health Specialist


SURVEYOR'S CERTIFICATE

I, Michael E. Dahlin, PLS #17534, State of Idaho, hereby certify that the above platted and described property represents a survey performed by me or under my supervision in accordance with the laws of the State of Idaho, and that the streets, lots, distances, and monuments have been measured and located as shown thereon.
The interior monuments will be set in accordance with Idaho Code 50-1303, on or before 09-01-2025, as referenced on the plat and approved by the City of Moscow.



Witness my hand and seal this ____ day of _____, 2024.



Michael E. Dahlin _____ Idaho Professional Land Surveyor

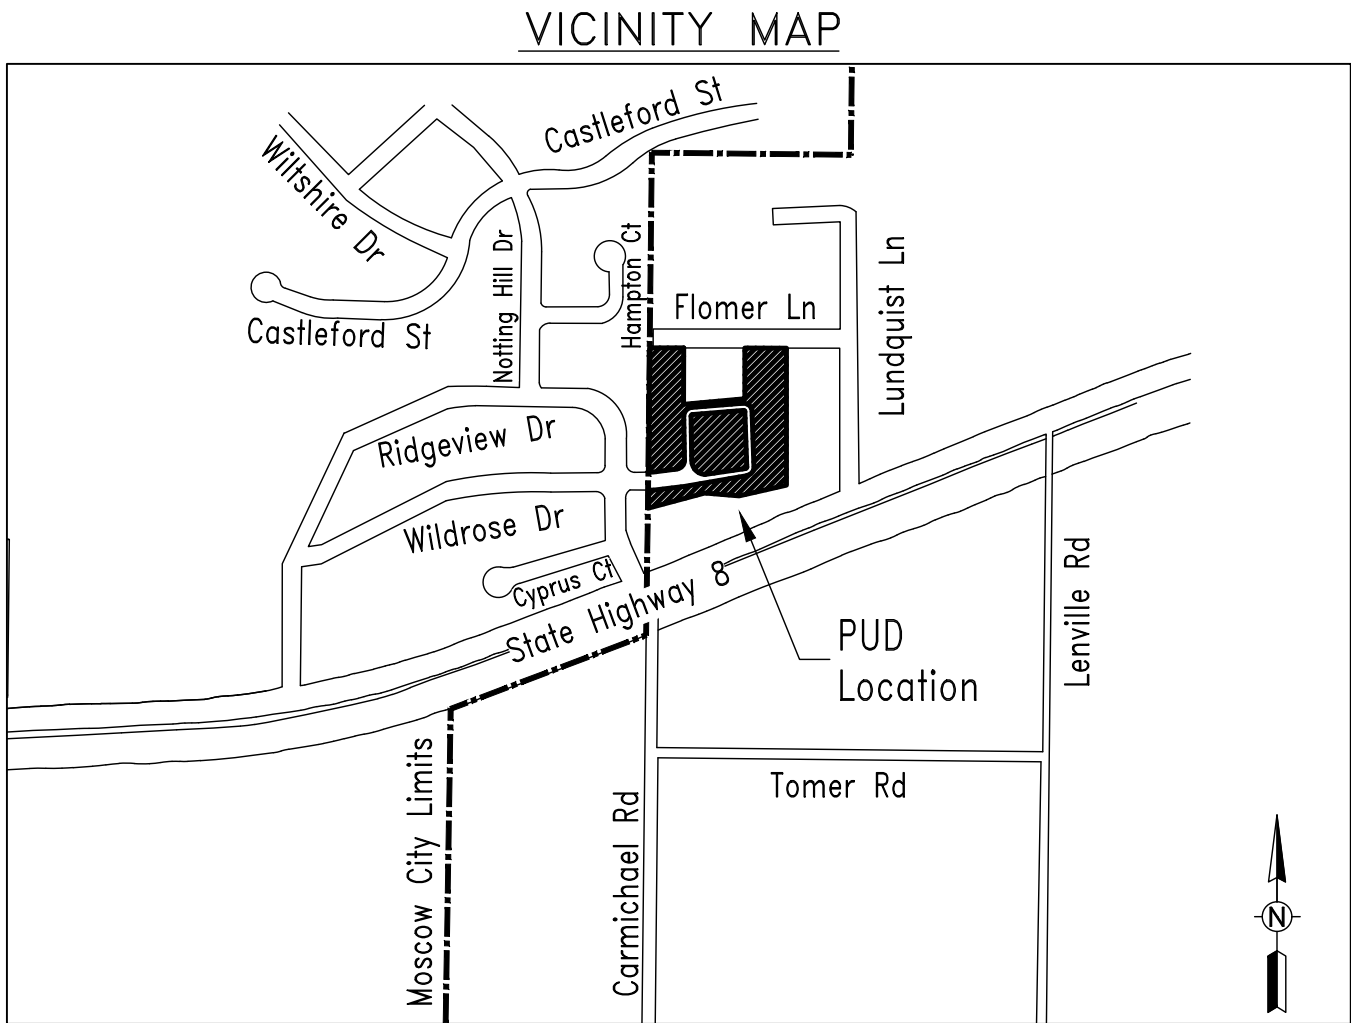

NO. _____ AT THE REQUEST OF: _____
DATE & HOUR: _____ M.
JULIE FRY
LATAH COUNTY RECORDER
FEE \$ _____ BY _____

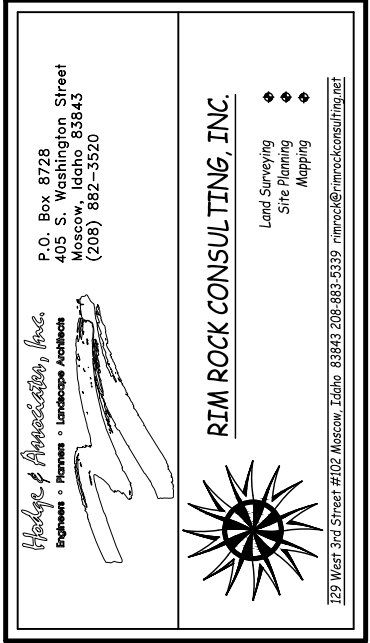

Subdivision Plat of:
Wildrose Court PUD
Moscow, Idaho

Drafted by:	DC
Checked by:	SW/MED
File Name:	PUD PLAT
Tab:	Sign
Plot Style	Primary.ctb
Project:	4543-05-22
Date:	8/23/24

Section 16, T39N, R5W, BM

Survey References:

- Ridgeview Estates 2nd Addition, Instrument #577638, by J. Hammond, RLS #2102.
- Southgate 3rd Addition, Instrument #540165, by J. Hammond, RLS #2102.
- Lundquist Addition, Instrument #219584, by M. Conitz, PE #1301.
- Warranty Deed, Instrument #611335, Nelson to Nash.
- Warranty Deed, Instrument #620602, Glasgow Properties/Lois Pritchett to Providenza, LLC.
- Quitclaim Deed, Instrument #597618.
- Record of Survey, Instrument #579637.
- Plat of Section 16, Township 39 North, Range 5 West, Book 2, Page 36.
- Order to Vacate, Instrument #320845.
- Record of Survey, Instrument #624009, by M. Dahlin, PLS #17534.
- Quitclaim Deed, Instrument #625168.
- Quitclaim Deed, Instrument #625169.
- Quitclaim Deed, Instrument #625170.
- Easement Agreement, Instrument #625212.

Surveyor's Certificate

I, Michael E. Dahlin, PLS #17534, State of Idaho, do hereby certify that the survey represented by this map was performed by me or under my supervision in accordance with the laws of the State of Idaho and at the request of Providenza, LLC in August 2024.

Basis of Bearings

The Basis of Bearings for this survey is identical to the Idaho Coordinate System, West Zone, NAD 83 as shown between the northwest corner of the Southeast Quarter of Section 16, and the northeast corner of the Southeast Quarter of Section 16, said bearing being S89°45'01"E.

Surveyor Narrative

- The purpose of this survey was to locate, monument and map the boundaries of Providenza, LLC, per Record of Survey, Instrument #624009, and to divide said parcel into sixteen separate lots to be, the Plat of Wildrose Court, as shown hereon.
- See Record of Survey, Instrument #624009 for boundary resolution and additional record data. Measured dimensions shown on this map match all corresponding record dimensions from said survey.
- The North line of the Southeast Quarter of Section 16 was located to establish the Basis of Bearings and primary boundary control. The Parcel described in Warranty Deed, Instrument #620602, Latah County Records, was rotated to project basis and located accordingly.

Legend

- Found Monument as Described
- Set 5/8" Diameter Rebar w/Aluminum Cap Stamped "PLS 17534"
- Found 1" Iron Pipe, Leaning, Shot at Base
- Found 5/8" Diameter Rebar w/Yellow Plastic Cap Stamped "HEDCO, Inc. PE/LS 2102" or as Described
- Found 1/2" Diameter Rebar, No Cap
- Calculated Position
- Found Centerline Monument
- Set Easement or Dedication Monument
- Same Ownership
- Block Number
- Lot Number
- Curve Tag - See Curve Table
- Record Data - See Survey References
- Boundary Line
- Lot Line
- Section/Section Subdivision Line
- Centerline
- Right-of-Way
- Vacated Right-of-Way
- Existing Easement Line
- Proposed Utility Easement


NO. _____ AT THE REQUEST OF:

DATE & HOUR: _____

JULIE FRY
LATAH COUNTY RECORDER



FEE \$ _____ BY _____

SCALE: 1"=50'



Curve Table					
Curve	Length	Delta	Radius	Chord	Chrd Brng
C1	44.55'	76°11'28"	33.50'	41.34'	N38°26'37"E
C2	54.47'	93°09'38"	33.50'	48.66'	N46°13'56"W
C3	50.77'	86°50'22"	33.50'	46.05'	S43°46'04"W
C4	35.32'	89°55'48"	22.50'	31.80'	N45°18'47"E
C5	31.25'	76°11'28"	23.50'	29.00'	N38°26'37"E
C6	38.71'	94°21'07"	23.51'	34.48'	N45°37'41"W
C7	36.12'	88°01'43"	23.51'	32.67'	S43°09'50"W
C8	42.58'	103°48'32"	23.50'	36.99'	S51°33'23"E
C9	23.01'	39°20'55"	33.50'	22.56'	S20°01'20"W
C10	16.27'	27°49'55"	33.50'	16.11'	S53°36'45"W
C11	74.72'	54°11'35"	79.00'	71.97'	S26°44'55"E
C12	86.66'	84°09'17"	59.00'	79.08'	N41°43'46"W
C13	28.60'	40°49'01"	40.14'	28.00'	N61°19'48"E
C14	6.11'	10°27'08"	33.50'	6.10'	S72°45'17"W

Tract Table		
TRACT	TYPE	AREA
A	STORMWATER	5,319 FT²
B	ROADWAY	29,316 FT²
C	OPEN SPACE	6,926 FT²
D	PATHWAY	3,202 FT²
E	OPEN SPACE	2,064 FT²

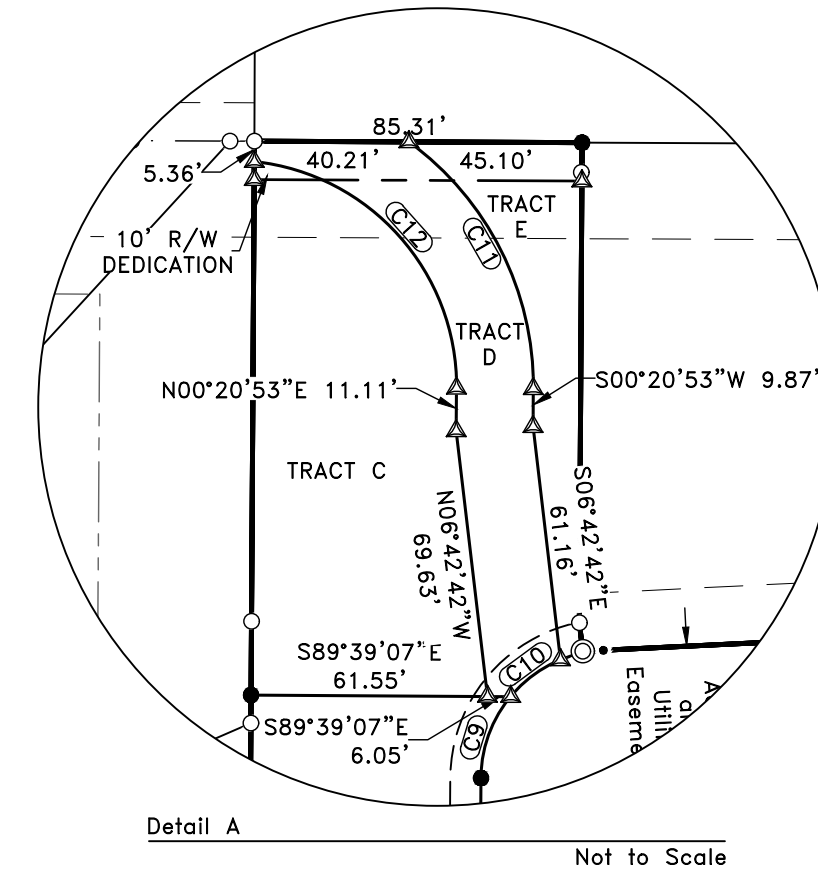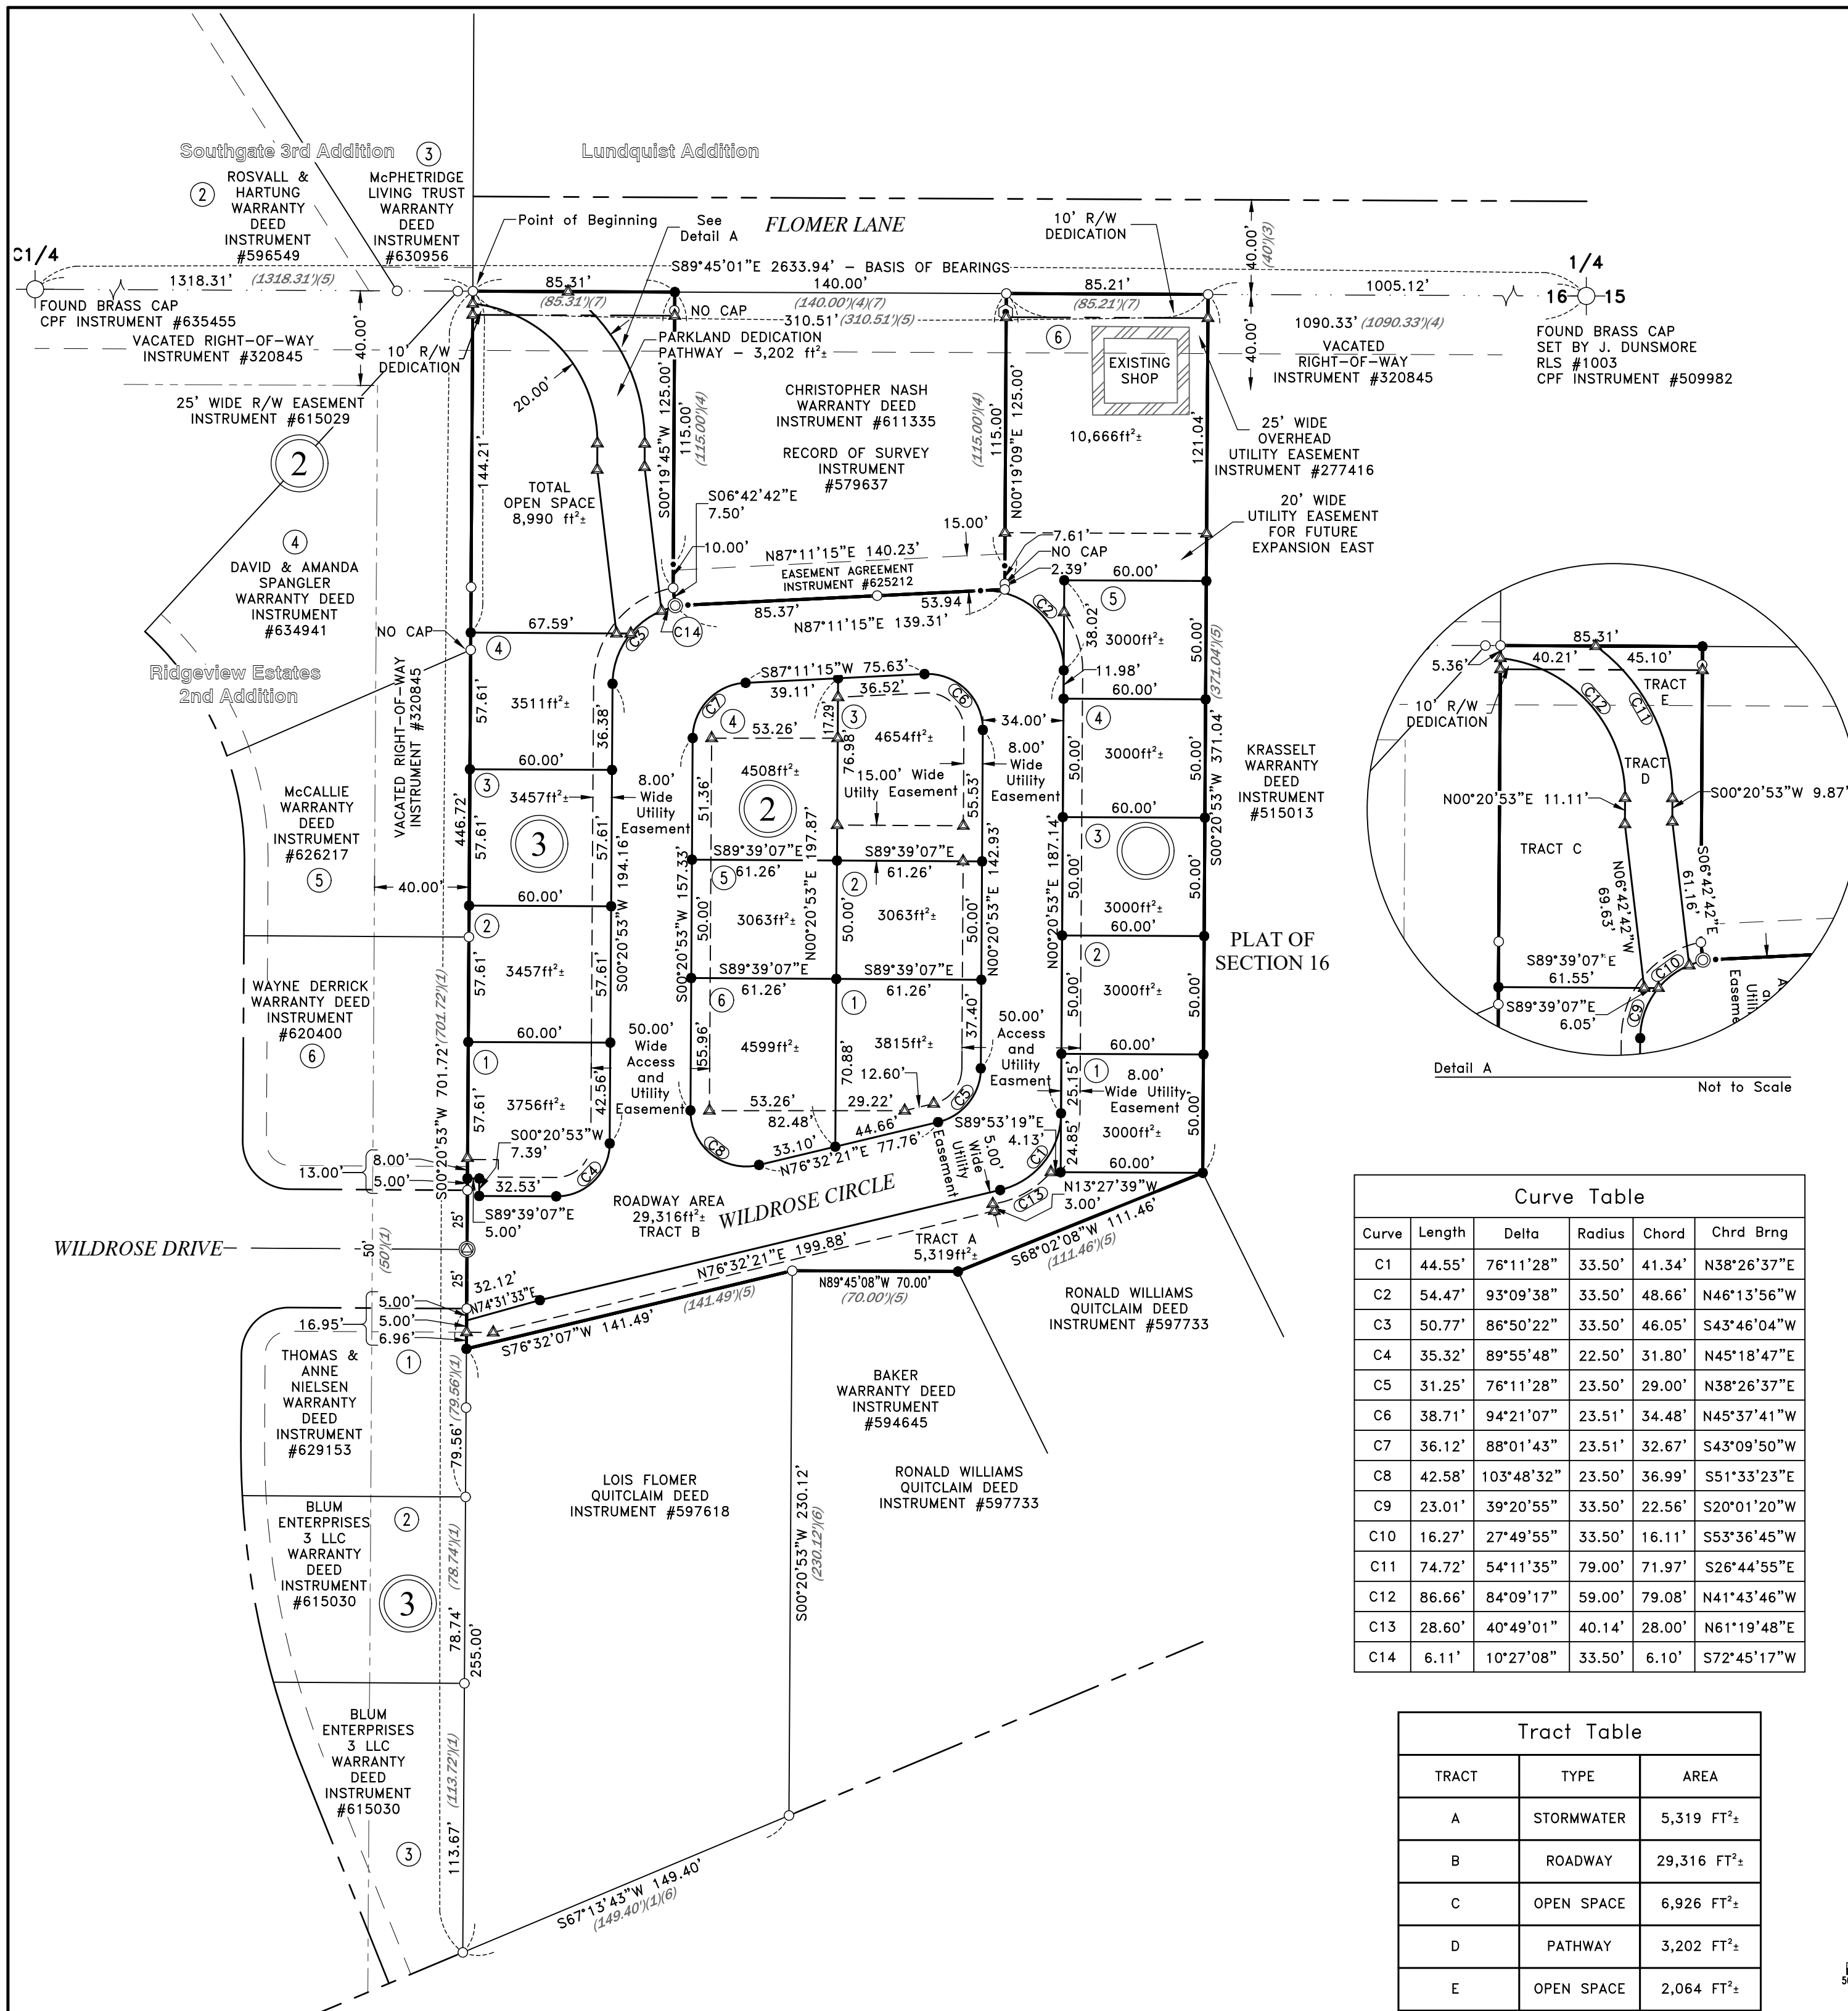

Professional Land Surveyor
17534
STATE OF IDAHO
MICHAEL E. DAHLIN

Surveyor's Seal and Signature

Subdivision Plat of:
Wildrose Court PUD
Moscow, Idaho

Drafted by: DC

Checked by: SW/MED

File Name: PUD PLAT

Tab: Layout

Plot Style: Primary.ctb

Project: 4543-05-22

Date: 8/23/24

2 of 2



**CITY OF MOSCOW
COMMUNITY DEVELOPMENT**
Ph: 208-883-7035
504 S. Washington Street
jfleischman@ci.moscow.id.us
mray@ci.moscow.id.us

For City Use Only			
Date Received		8/9/24	
Dept	Fee Type	Fees	Paid
CDV	Application Fee	\$458.00 plus \$28.50/lot	☐
Receipt Number		LUP2024-0028	



APPLICATION FOR FINAL PLANNED UNIT DEVELOPMENT

(Please type or print plainly with blue ink.)

APPLICANT:

Name: RON STRUTHERS & DAVE DAIL

Phone: (208) 892-4339
(208) 310-0855

Address: 1008 WARREN LN, Moscow, ID 83843

Email: ron@sunriseapartments.com
davedail.realtor@gmail.com

OWNER: (if other than applicant)

Name: _____ Phone: _____

Address: _____ Email: _____

PROPERTY:

1. Proposed PUD Name: WILDOSE ~~CIRCLE~~ COURT

2. Address(es) or Parcel Number(s): RP39N05W167355

AUTHORIZATION:

Describe any changes in design or construction since approval of the Preliminary PUD:

The layout of the interior lots has changed, along with the overall size of the PUD, going from an original 18 lots, to 16 lots. Easements have increased from 5' wide to 8' wide. The open areas in the NW corner have changed from original, to account for the pathway dedication.

CONDITIONS OF APPROVAL:

The Commission or Council (in the case of a Type 2 PUD application) may impose conditions including, but not limited to, those (1) minimizing adverse impact on other development; (2) controlling the sequence and timing of development; (3) controlling the duration of development; (4) assuring that development is maintained properly; (5) designating the exact location and nature of development; (6) requiring the provision for onsite or offsite public facilities or services; (7) requiring more restrictive standards than those generally required in an ordinance; and/or (8) requiring mitigation of effects of the proposed development upon service delivery by any political subdivision, including school districts, providing services within the planning jurisdiction.

COMPLIANCE:

1. The Final PUD process is intended to give the Zoning Administrator, Planning and Zoning Commission, or the Council (in the case of Type 2 PUD application), an opportunity to determine whether the proposed development conforms to the intent of the preliminary approval. The applicant is required to detail any proposed development agreements, condominium agreements, deed restrictions, or other commitments needed to assure adherence to the proposed development plan, and to provide final plans indicating how conditions or modifications imposed at preliminary approval will be met.
2. If the final proposal is substantially unchanged from the application provided for preliminary approval, and if it adequately incorporates all required conditions or modifications, it may be acted on by majority vote of the Planning and Zoning Commission as a regular agenda item at a regularly scheduled meeting (or City Council, in the case of a Type 2 PUD application). The deciding body may grant final approval, may grant final approval with minor modifications or conditions, or may deny the application.
3. If the proposal differs significantly from the proposal discussed at earlier public hearings beyond those changes required as conditions of the preliminary approval, or if conditions or modifications are contemplated which differ significantly from those presented at earlier hearings, then a new public hearing must be conducted by the Planning and Zoning Commission (or City Council in the case of a Type 2 PUD application) prior to final project approval.


REVOCATIONS:

If building permits pertaining to an approved PUD, consistent with any proposed phasing, are not obtained within eighteen (18) months of the final PUD approval, such final PUD approval shall be immediately revoked and shall be automatically null and void. The applicant may request a one (1) time extension of a final PUD approval not to exceed one (1) year. Such request shall be in writing and shall be approved by the applicable decision-making body prior to expiration of the original PUD approval or such approval shall not be granted.

The following items must be submitted with this application before it will be processed:

1. Application Fees
2. Site Plan, drawn to scale (1 electronic copy; 1 - 11" x 17" hard copy)
3. Floor Plans, drawn to scale (1 electronic copy; 1 - 11" x 17" hard copy)
4. Elevation Drawings and/or Renderings, drawn to scale (1 electronic copy; 1 - 11" x 17" hard copy)
5. Evidence of clear title to any lands to be conveyed or reserved for parks, scenic ways, playgrounds, schools, public buildings, or other public purposes.
6. Final plans showing location of water, sewer, drainage and all other utilities, and plans for street improvements and grading.
7. A final phasing plan.

I understand this information is a public record and may be posted to a public website. I certify under penalty of perjury pursuant to the law of the State of Idaho that the foregoing is true and correct.



 Signature of Applicant

08/09/24

 Date

 Signature of Property Owner (if different)

 Date



Southeast Moscow Water & Sewer District

c/o B. Warnick
1180 Lundquist Lane
Moscow, ID 83843
semwsd1@gmail.com

April 26, 2024

Dave Dail
davedail.realtor@gmail.com


RE: Wildrose Court Development connection to SE Moscow Water & Sewer District system

Mr. Dail,


In response to your request for SE Moscow Water & Sewer District approval to connect the Wildrose Ct development to the District sewer system, the board has approved the request based on confirmation from City of Moscow staff that sufficient capacity exists.

The properties involved will be required to adhere to the terms and conditions of the Agreement for Sewage Collection, Conveyance, and Disposal Services between the City of Moscow and the Southeast Moscow Water and Sewer District in addition to the agreement between the North Latah Highway District and the Southeast Moscow Water and Sewer District. Copies of both agreements are attached to this email.

When the development plans are finalized, please notify the district so we will know what hookup fees to expect from the City of Moscow when the homes are completed.

Best regards, 
Barbara Warnick

President, SE Moscow Water & Sewer District



WILDROSE COURT PUD

CITY OF MOSCOW LATAH COUNTY, IDAHO







Know what's below.
Call before you dig.

BASIS OF ELEVATION


THE BASIS OF ELEVATION FOR THIS SURVEY IS NAVD88, ESTABLISHED BY GPS. THE BASE POSITION BEING CORRECTED BY NGS ONLINE POSITIONING USER SERVICE (OPUS).

DRAWING INDEX

Sheet Number	Sheet Title
C1	COVER SHEET
C2	EROSION CONTROL AND GRADING PLAN
C3	UTILITY LAYOUT PLAN
C4	WALL PLAN AND PROFILE
C5	DETAIL
C6	WALL DETAIL

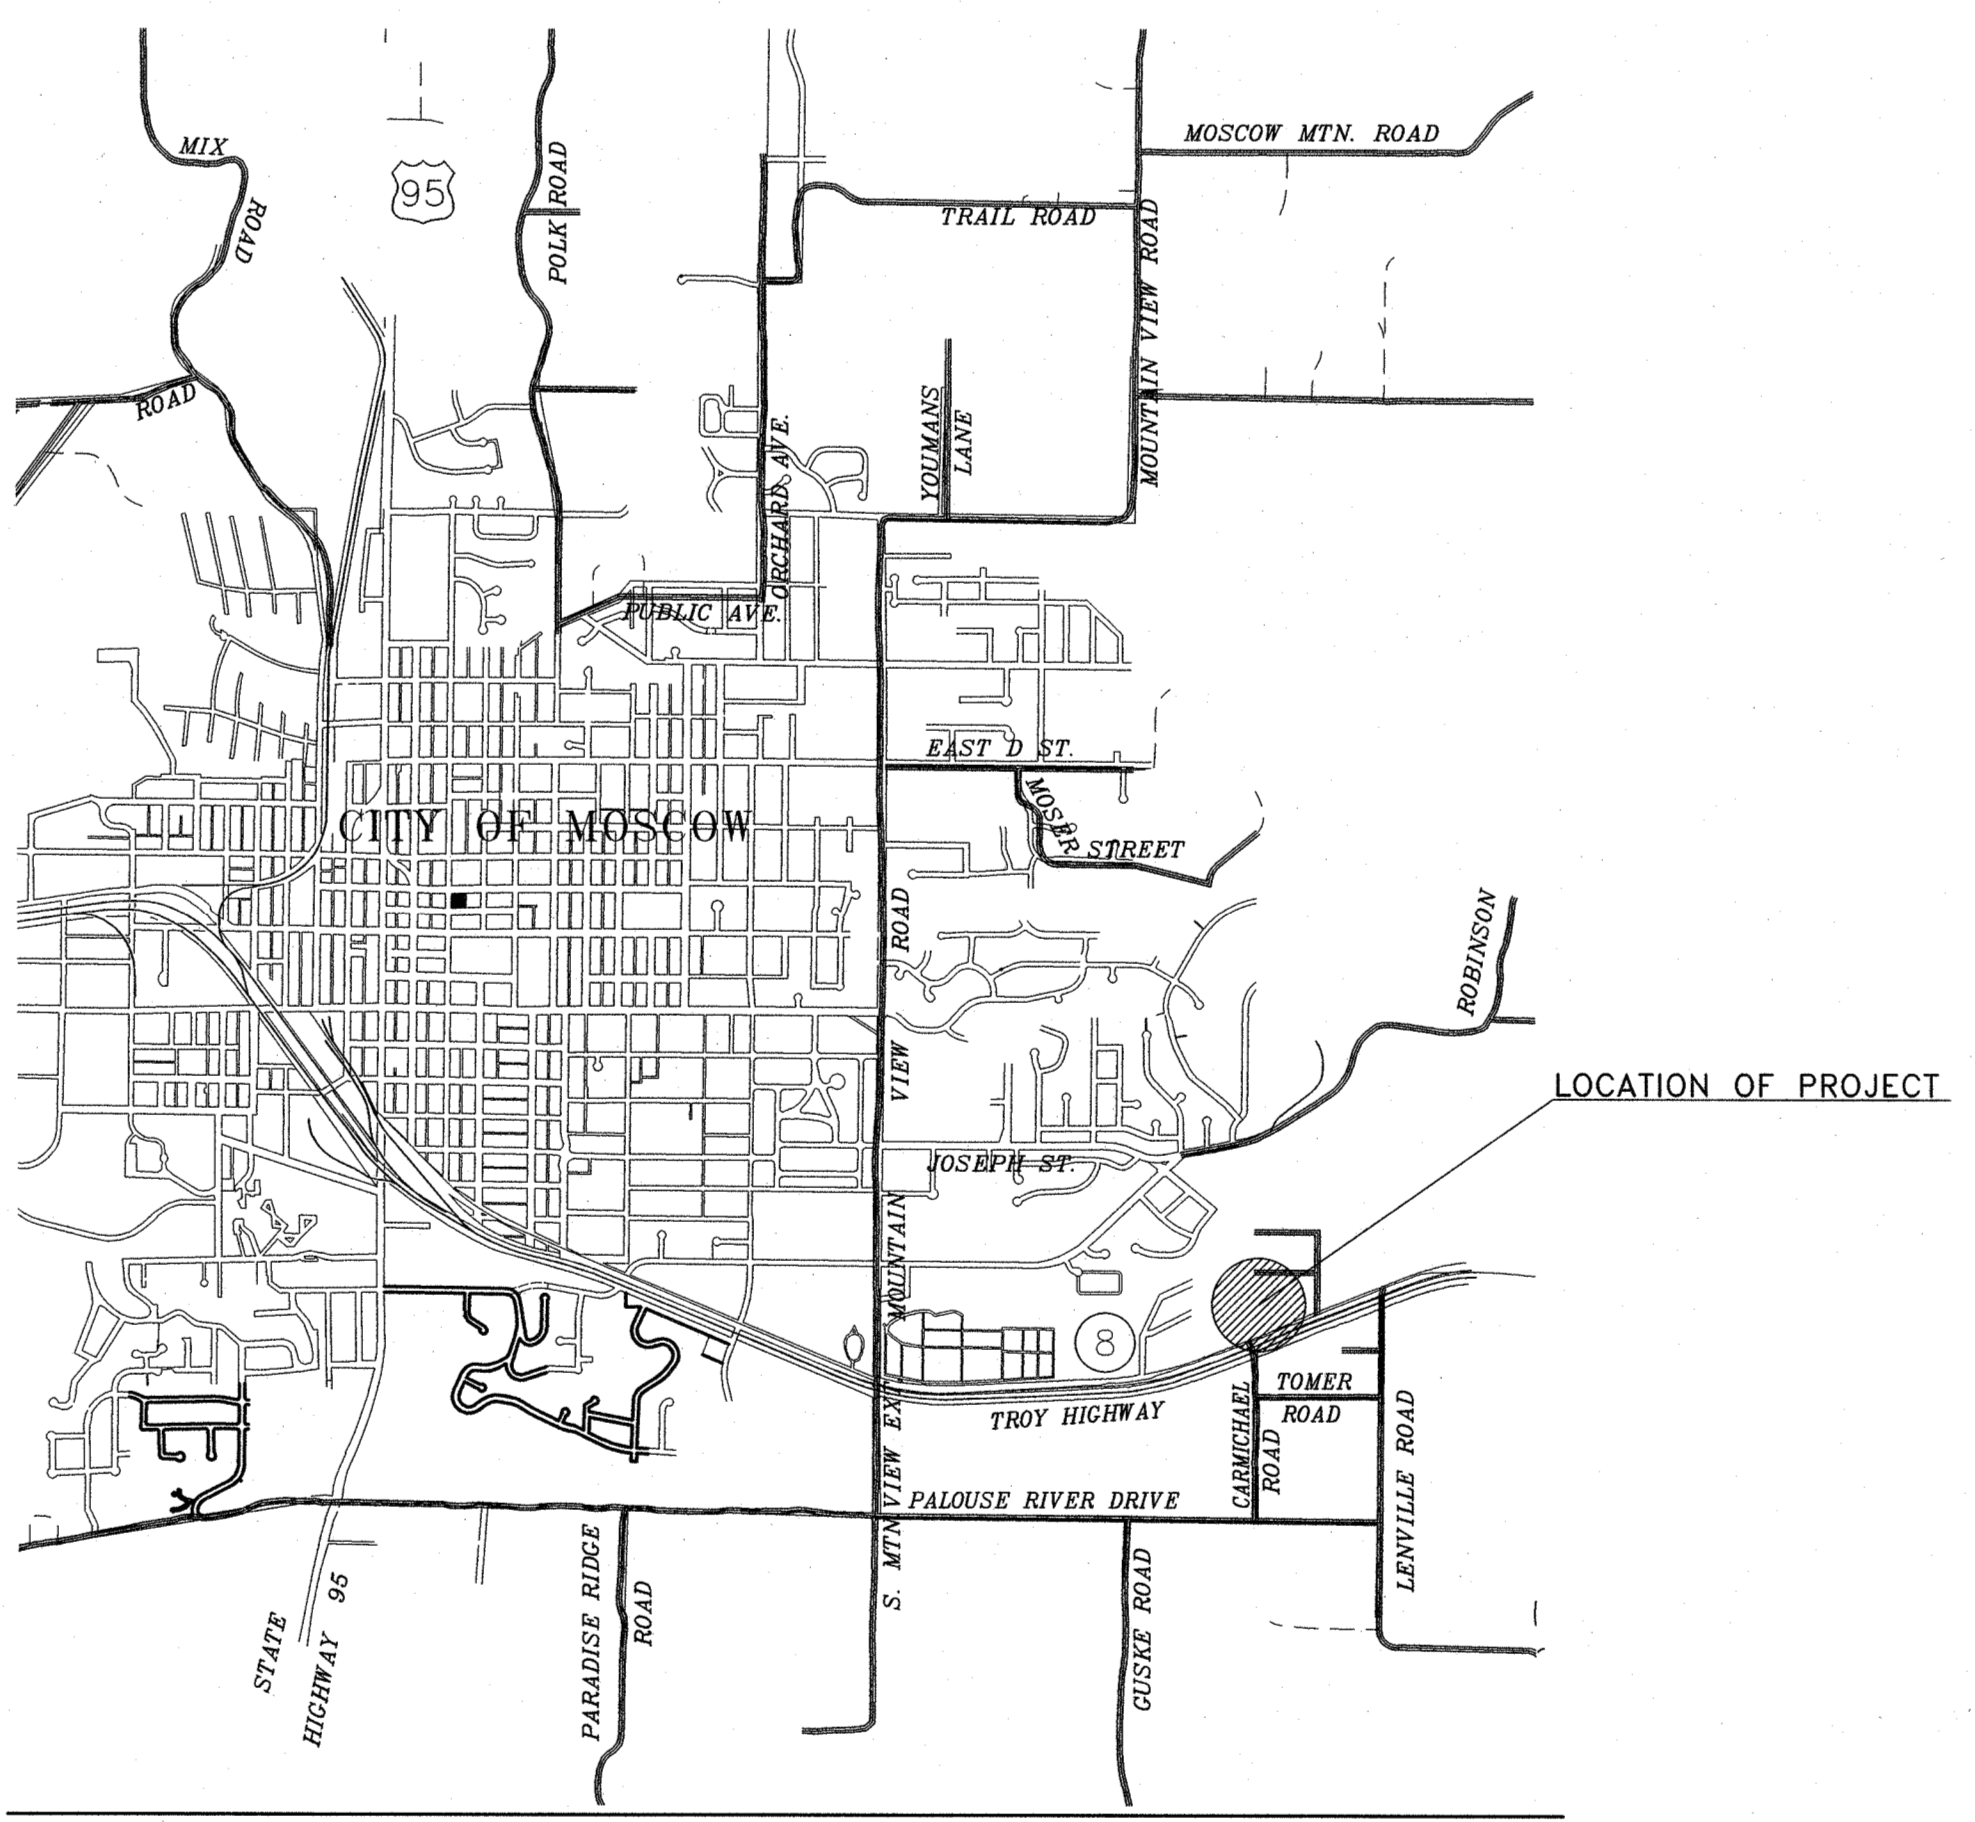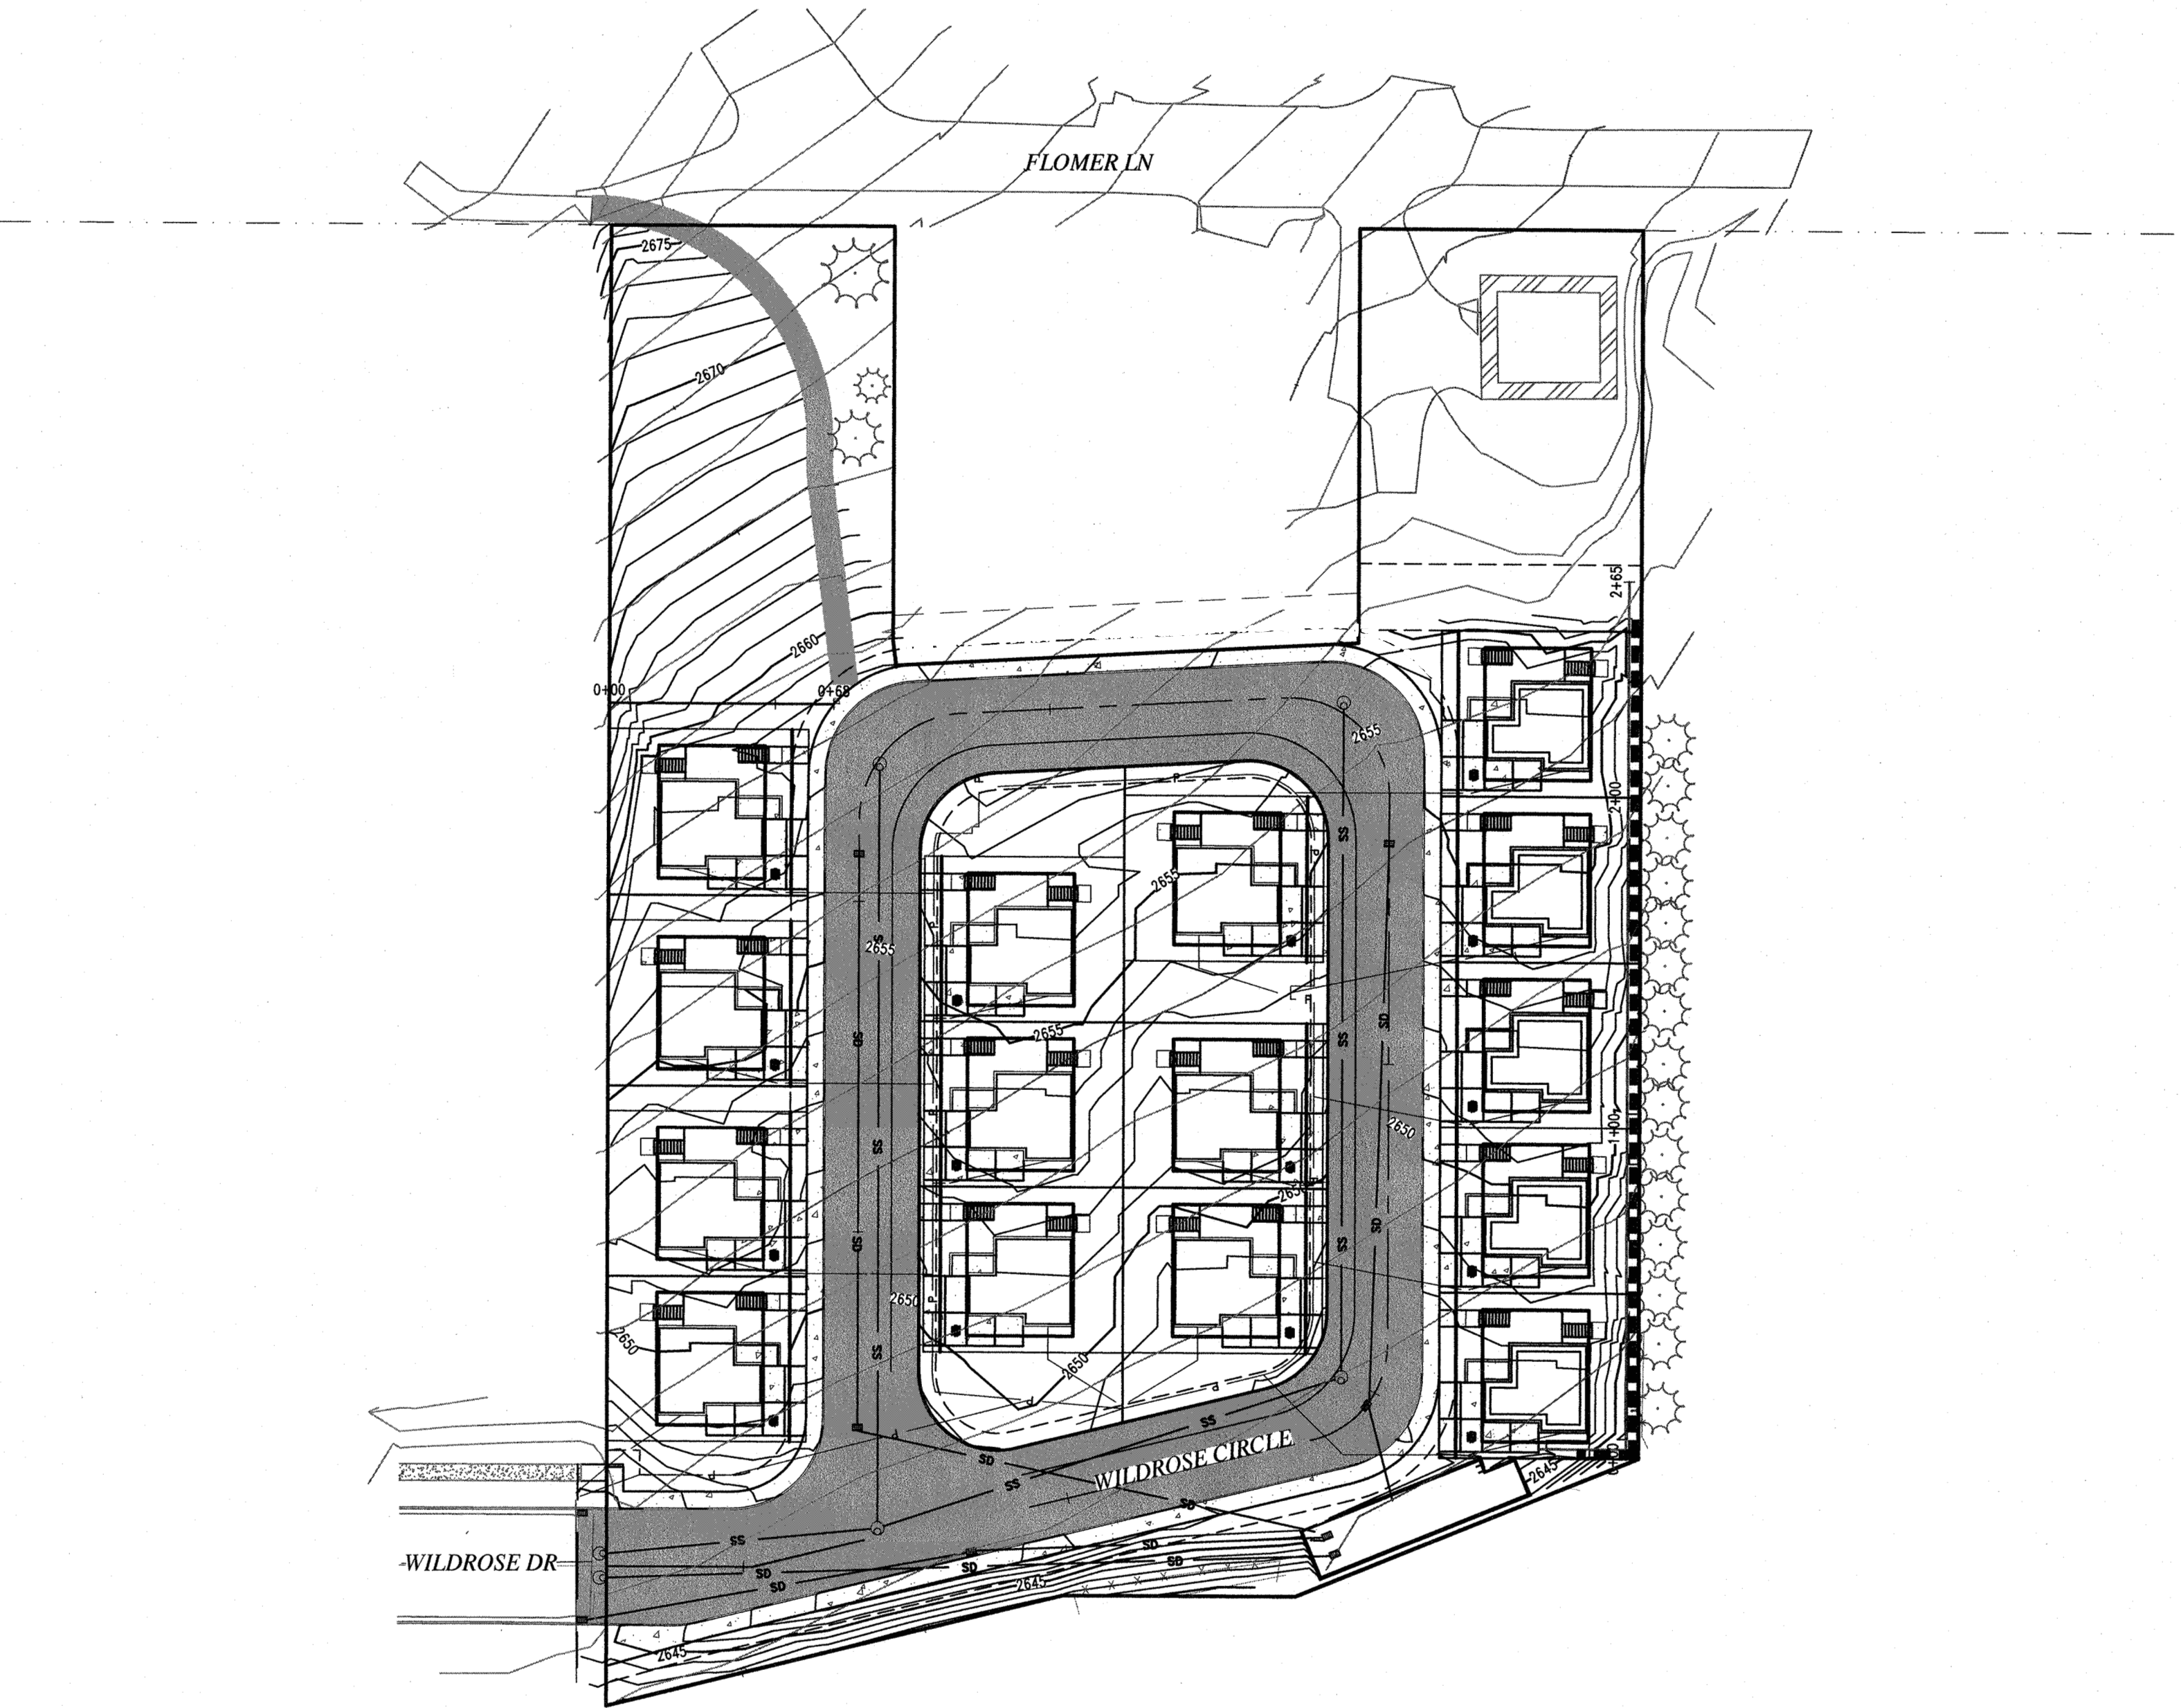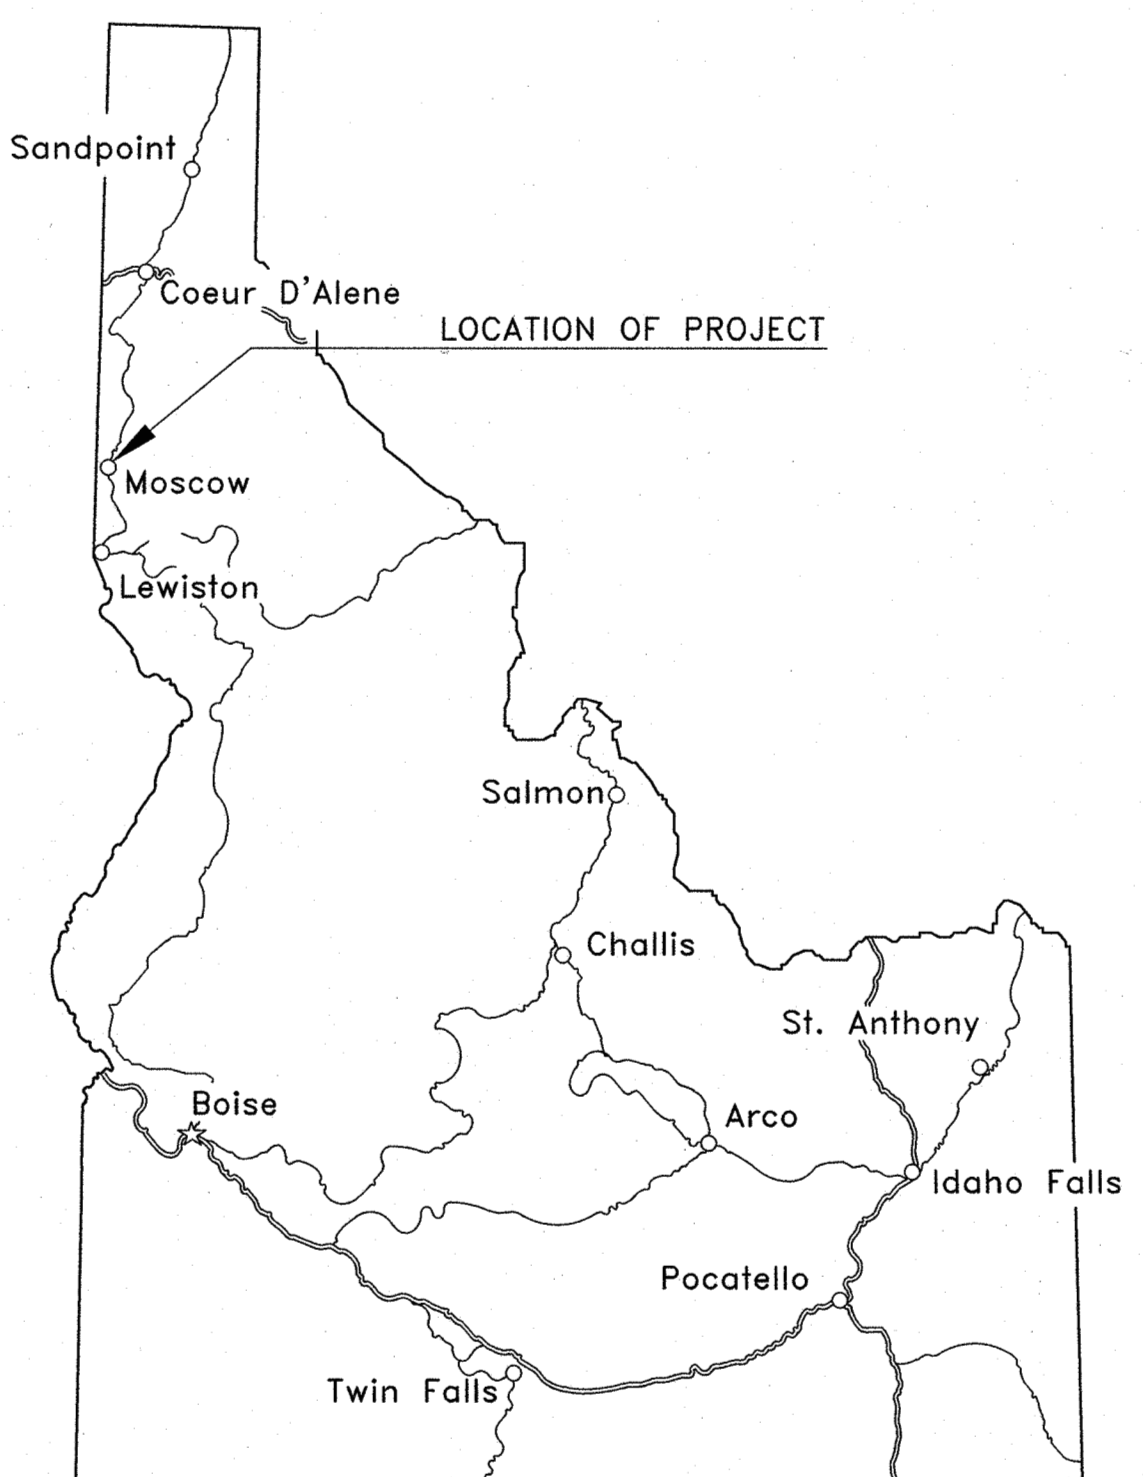


Hedge & Associates, Inc.
Engineers • Planners • Landscape Architects
P.O. Box 8728
405 S. Washington Street
Moscow Idaho 83843
(208) 882-3520

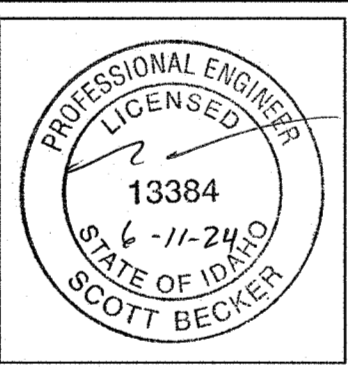

WILDROSE COURT
COVER SHEET
RON STRUTHERS
FLOMER LANE
MOSCOW, IDAHO
(208) 882-4339

Designed By:	SB
Drafted by:	DC
Checked by:	SB
File Name:	COVER.dwg
Tab:	COVER
Layer Style:	STANDARD
Plot Style:	PRIMARY.CTB
Project:	4543-06-22
Date:	6/6/2024

C1

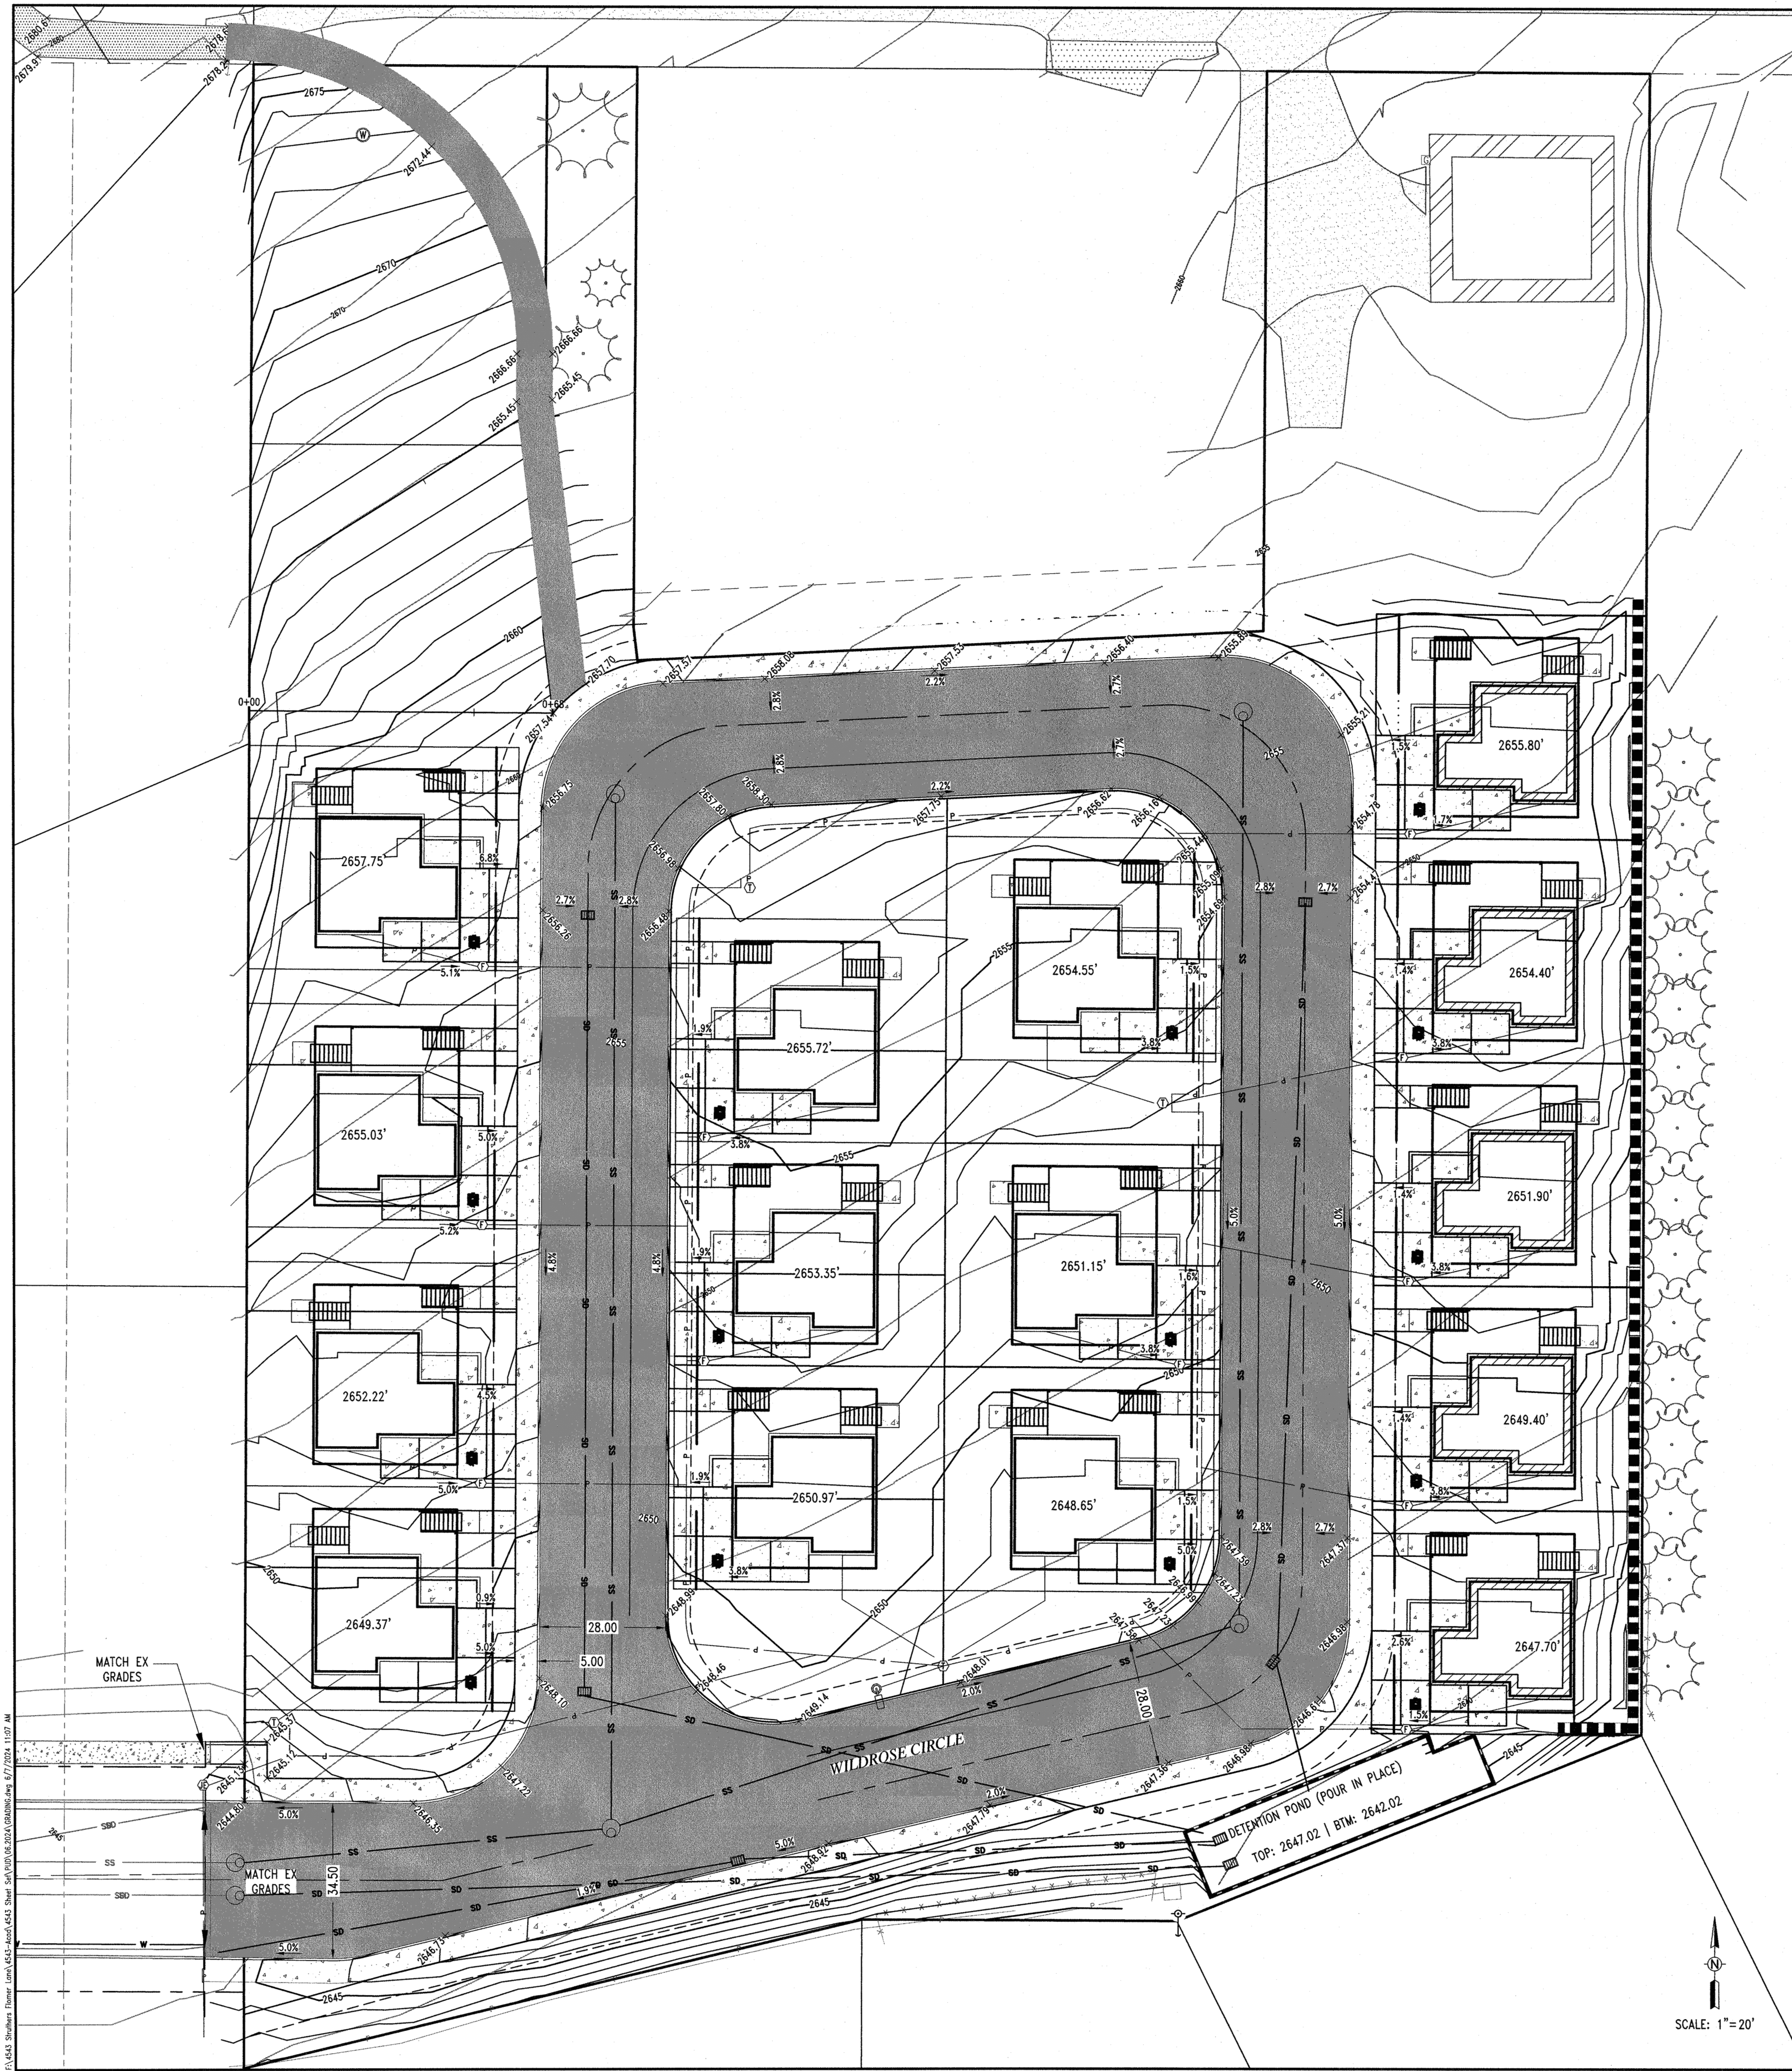

BASIS OF ELEVATION

THE BASIS OF ELEVATION FOR THIS SURVEY IS NAVD88, ESTABLISHED BY GPS. THE BASE POSITION BEING CORRECTED BY NGS ONLINE POSITIONING USER SERVICE (OPUS).



Know what's below.
Call before you dig.

GRADING NOTES

ESTIMATED GRADING QUANTITIES

CUT VOLUME = 834 C.Y.

- FILL VOLUME = 13,708 C.Y. (ASSUMES 22% SHRINKAGE DUE TO COMPACTION)
- THIS PLAN IS ACCURATE FOR GRADING AND THE RELATED EROSION AND SEDIMENT CONTROL PURPOSES ONLY.
- ALL AREAS TO RECEIVE EMBANKMENT (FILL) SHALL FIRST BE CLEARED AND GRUBBED.
- ALL TOPSOIL SHALL BE EXCAVATED AND REMOVED FROM EMBANKMENT (FILL) AREAS. EXCAVATED TOPSOIL MATERIAL MAY BE STOCKPILED ON-SITE FOR USE AS LANDSCAPING MATERIAL - PROVIDE SILT FENCE AROUND STOCKPILES.
- BORROW FOR EMBANKMENT (FILL) SHALL CONSIST OF NATIVE PALOUSE LOESS OR CLAY, OR ANY APPROVED GRAVELLY MATERIAL. ALL BORROW SHALL BE FREE OF ROOTS, BARK, TOPSOIL, ORGANIC OR OTHER DELETERIOUS MATERIALS.
- COMPACT ALL EMBANKMENT (FILL) TO 95% MINIMUM OF THE PROCTOR VALUE DENSITY DETERMINED BY THE AASHTO T-99 METHOD. THE METHOD FOR CONSTRUCTING EMBANKMENT (FILL) SHALL BE SUCH THAT 95% MINIMUM DENSITIES ARE ACHIEVED THROUGHOUT.
- WHERE EMBANKMENT (FILL) IS PLACED ON AN EXISTING SLOPE 4:1 OR STEEPER THE EXISTING SLOPE SHALL BE BENCHED HORIZONTAL PRIOR TO PLACING BORROW. THE WIDTH OF THE BENCHES SHALL NOT BE LESS THAN FIVE (5) FEET IN WIDTH.
- COMPACTION TESTING SHALL BE PROVIDED BY THE OWNER. COMPACTION TEST LOCATIONS SHALL BE RECORDED ON A SITE PLAN SHOWING TEST NUMBER, DATE, AND ELEVATION OF EACH TEST. A REPORT OF THESE TESTS SHALL BE PROVIDED TO THE OWNERS, ENGINEER, CONTRACTOR, AND CITY. THERE SHALL BE A SUFFICIENT NUMBER OF TESTS TO ASSURE THAT 95% MINIMUM COMPACTION HAS BEEN ACHIEVED THROUGHOUT ALL EMBANKMENT (FILL) AREAS.
- OWNER IS RESPONSIBLE TO SECURE ALL NECESSARY AUTHORIZATION FOR GRADING ACTIVITIES REQUIRED ON ADJACENT PROPERTIES.
- A CITY OF MOSCOW GRADING PERMIT IS REQUIRED.
- COMPLIANCE WITH NPDES PHASE II IS REQUIRED

EROSION CONTROL NOTES

- EROSION CONTROL MEASURES AS SET FORTH IN THIS PLAN SHALL APPLY TO ALL CONSTRUCTION ACTIVITY RELATIVE TO THIS SITE, INCLUDING BUT NOT LIMITED TO, ALL EARTHWORK AND INSTALLATION OF PUBLIC IMPROVEMENTS.
- SHOULD THE CITY ENGINEER DETERMINE THAT THE EROSION CONTROL MEASURES INSTALLED AS INDICATED ON THIS EROSION CONTROL PLAN ARE INADEQUATE AND/OR INEFFECTIVE, THE CITY ENGINEER SHALL DIRECT THE IMPLEMENTATION OF ADDITIONAL EROSION CONTROL MEASURES (AT THE EXPENSE OF THE DEVELOPER) TO ALLEVIATE INADEQUACIES.
- THE OWNER AND/OR DEVELOPER OF THE PROPERTY IS ULTIMATELY RESPONSIBLE FOR THE FURNISHING, INSTALLATION AND MAINTENANCE OF ALL EROSION CONTROL MEASURES NECESSARY FOR FULL COMPLIANCE WITH MOSCOW CITY CODE.

OWNERS AND OPERATORS OF CONSTRUCTION PROJECTS THAT: 1) DISTURB ONE OR MORE ACRES (OR ARE PART OF A COMMON PLAN OF DEVELOPMENT THAT DISTURBS ONE OR MORE ACRES) AND 2) DISCHARGE STORM WATER, MUST OBTAIN COVERAGE UNDER THE STORM WATER CONSTRUCTION GENERAL PERMIT FROM THE IDAHO DEPARTMENT OF ENVIRONMENTAL QUALITY.

SURFACE & WASTEWATER DEPARTMENT DIVISION
IDPE PROGRAM
1410 N. HILTON
BOISE, IDAHO 83706

PRIOR TO CONSTRUCTION ACTIVITIES:

- INFORM CITY, AND OTHER INSPECTORS, OF WORK SCHEDULED FOR WEEKENDS OR HOLIDAY.
- CONSTRUCT GRAVEL PADS AT ENTRANCES TO SITE, AS INDICATED ON PLAN.
- PLACE SILT FENCING AND CHECK DAMS AS INDICATED ON PLAN PRIOR TO ANY EXCAVATION OR EMBANKMENT WORK. IN GENERAL, CHECK DAMS SHALL BE PLACED AT MINIMUM 100 FOOT SPACING IN ALL SWALES AND DITCHES AND AT MINIMUM 50 FOOT SPACING ALONG SILT FENCE. ON SLOPES GREATER THAN 10% CHECK DAMS SHALL BE MADE OF ROCK, STRAW BALES, OR SILT FENCE, PER MOSCOW CITY STANDARDS.
- GRADE ACCESS ROAD(S) TO ROADWAY CROSS-SLOPE TO PROVIDE DRAINAGE TO ROADSIDE DITCHES.
- PLACE SILT FENCING AND STRAW BALES TO PROTECT EXISTING STORM WATER DRAINAGE FACILITIES THAT WILL BE IMPACTED BY THIS WORK. PROTECT EXISTING FACILITIES ON ADJACENT PROPERTY, AS NECESSARY. EXISTING CATCH BASINS SHALL BE PROTECTED PER DETAIL 3, THIS PAGE. MAINTAIN UNIMPEDED FLOW INTO CATCH BASINS THROUGHOUT CONSTRUCTION.
- CONSTRUCT TEMPORARY SEDIMENT POND(S) IN THE LOCATION(S) AS SHOWN ON THE PLAN, INCLUDING DIRECTIVE DITCHES ALSO AS SHOWN THEREON AND/OR OTHERWISE REQUIRED.

DURING CONSTRUCTION ACTIVITIES AND WINTER SHUTDOWN, AS NECESSARY:

- SUSPEND ALL EXCAVATION AND EMBANKMENT WORK DURING RAIN STORMS TO MINIMIZE EROSION AND SEDIMENT IMPACTS. MONITOR SITE CONDITIONS DURING AND FOLLOWING RAIN EVENTS FOR EROSION AND SEDIMENT CONTROL PROBLEMS - INSTALL CORRECTIVE MEASURES AND INITIATE CLEANUP MEASURES AS REQUIRED.
- SPRAY WATER ON DISTURBED AREAS TO CONTROL DUST EROSION DURING DRY SEASON.
- CONSTRUCT STORM WATER FACILITIES AS EARLY AS POSSIBLE DURING CONSTRUCTION. PROTECT NEW STORM WATER FACILITIES SIMILAR TO EXISTING (SEE NOTE 5 OF "PRIOR TO CONSTRUCTION ACTIVITIES").
- SEED AND MULCH ALL DISTURBED AREAS.
- ALL GRADED AREAS, FINISHED OR UNFINISHED, SHALL HAVE ACCEPTABLE EROSION CONTROL MEASURES APPLIED PRIOR TO OCTOBER 1 - NO EXCEPTIONS WITHOUT PRIOR WRITTEN CITY APPROVAL. ACCEPTABLE EROSION CONTROL MEASURES SHALL BE CONSIDERED ONE OF THE FOLLOWING:
 - HYDRAULICALLY APPLIED MIXTURE OF MULCH AND TACKIFIER - OF A TYPE AND APPLICATION RATE RECOMMENDED FOR MOSCOW AREA OPEN SOIL EROSION PROTECTION - SEED TO BE INCLUDED IF AREA IS FINISH GRADED.
 - AREAS SLOPING LESS THAN 4:1 TILLED WITH A FARM IMPLEMENT SUCH AS A DISC, PLOW OR SPRING TOOTH THAT RESULTS IN COARSE SURFACE TEXTURE.
 - STRAW SPREAD AND TRACKED INTO THE SURFACE. TRACK PERPENDICULAR TO THE DIRECTION OF FLOW.
 - EROSION CONTROL BLANKETS - INCLUDING AN APPROVED GRASS SEED/FERTILIZER MIX IF AREA IS FINISH GRADED.
 - OTHER METHODS AS SPECIFICALLY APPROVED BY THE CITY ENGINEER.

- ALL SLOPES 4:1 OR STEEPER SHALL BE CAT-TRACKED PERPENDICULAR TO THE DIRECTION OF FLOW PRIOR TO OCTOBER 1 - IN ADDITION TO ONE OF THE ACCEPTABLE EROSION CONTROL MEASURES SET FORTH IN NO. 5 ABOVE.
- SEED MIXTURES SHALL INCLUDE FERTILIZERS OF THE TYPE AND RATE OF APPLICATION AS RECOMMENDED BY GENERALLY ACCEPTED AREA PRACTICES.
- PRIOR TO OCTOBER 1 CONTINUOUS EROSION CONTROL BLANKETS PLUS STRAW BALES AND/OR ROCK CHECK DAMS @ 100 FOOT INTERVALS SHALL BE INSTALLED IN ALL AREAS HAVING A POTENTIAL FOR CONCENTRATED WATER FLOW (I.E. SWALES AND DRAINAGE CHANNELS).
- SEDIMENT PONDS INCLUDING CUTOFF / DIRECTIVE DITCHING, AS REQUIRED AND AS SHOWN ON THE PLANS SHALL BE IN PLACE AND OPERATIONAL PRIOR TO OCTOBER 1.

UPON COMPLETION OF CONSTRUCTION ACTIVITIES:

- SILT FENCING SHALL REMAIN AFTER THE COMPLETION OF CONSTRUCTION UNTIL SUFFICIENT VEGETATION IS ESTABLISHED TO PREVENT EROSION AND MOBILIZATION OF SEDIMENT, AND UNTIL APPROVAL FOR REMOVAL IS OBTAINED FROM THE CITY ENGINEER.
- PERIODIC MAINTENANCE OF EROSION CONTROL MEASURES IS REQUIRED UNTIL PERMANENT DRAINAGE FACILITIES ARE OPERATIONAL AND SUFFICIENT VEGETATION IS ESTABLISHED. SUCH MAINTENANCE INCLUDES, BUT IS NOT LIMITED TO: CLEANING OF CATCH BASINS AND STORM SEWER MANHOLES; MAINTAINING SILT FENCING AND STRAW BALE STRUCTURE; REMOVAL OF ACCUMULATED SOIL; AND STREET CLEANING. A TYPICAL SCHEDULE FOR SUCH MAINTENANCE WOULD BE AT LEAST ONCE PER MONTH AND AFTER ALL SIGNIFICANT STORM EVENTS.




UPON ESTABLISHMENT OF SUFFICIENT VEGETATION AND PERMANENT DRAINAGE FACILITIES OPERATION:

- REMOVE ALL EROSION CONTROL MEASURES UPON RECEIPT OF APPROVAL FOR SUCH REMOVAL FROM CITY ENGINEER. CLEAR STREETS AND SIDEWALKS OF ACCUMULATED SILT, MUD, AND DEBRIS.
- CONTINUED EROSION CONTROL IS THE PROPERTY OWNER'S RESPONSIBILITY AFTER EROSION CONTROL MEASURES ARE REMOVED, AND RECEIPT OF APPROVAL FROM THE CITY ENGINEER.

GRADING LEGEND


- | | |
|----------|---|
| 10% | GRADE ARROW - ARROW POINTS DOWNHILL |
| +2594.80 | SPOT ELEVATION - PROPOSED ASPHALT |
| +2594.06 | SPOT ELEVATION - TOP BACK OF CURB/ASPHALT |
| +2592.56 | EXISTING 1' CONTOUR INTERVAL |
| 30% | EXISTING 5' CONTOUR INTERVAL |
| 2574 | PROPOSED 1' CONTOUR INTERVAL |
| 2575 | PROPOSED 5' CONTOUR INTERVAL |
| | SILT FENCE |
| | PROPOSED EVERGREEN TREE |
| | PROPOSED SHRUB |
| | CURB - SEE DETAIL |
| | PROPOSED CONCRETE PAVING |
| | PROPOSED ASPHALT PAVING |
| | PROPOSED RETAINING WALL |

SCALE: 1"=20'

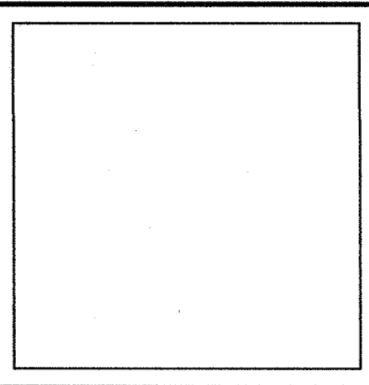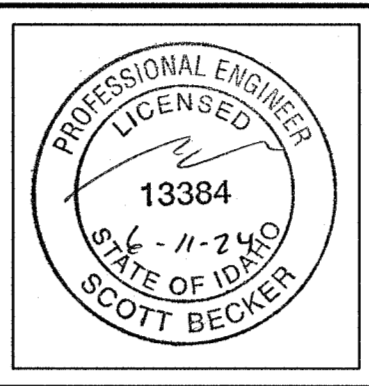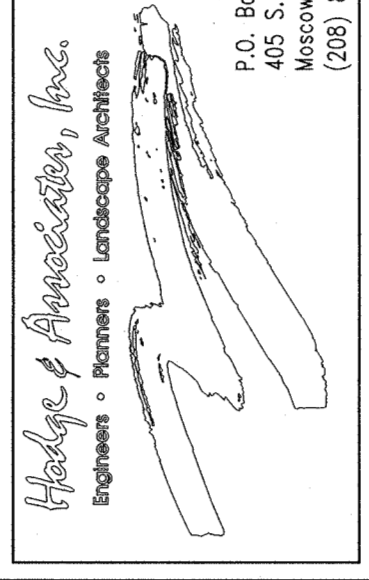











WILDROSE COURT
EROSION CONTROL AND GRADING PLAN: OVERALL
RON STRUTHERS
FLOWER LANE
MOSCOW, IDAHO
(208) 882-4339

Designed by:	SB
Drafted by:	DC
Checked by:	SB
File Name:	GRADING.dwg
Tab:	OVERALL GRADING
Layer Style:	STANDARD
Plot Style:	PRIMARY.CTB
Project:	4543-06-22
Date:	6/7/2024






Know what's below.
Call before you dig.

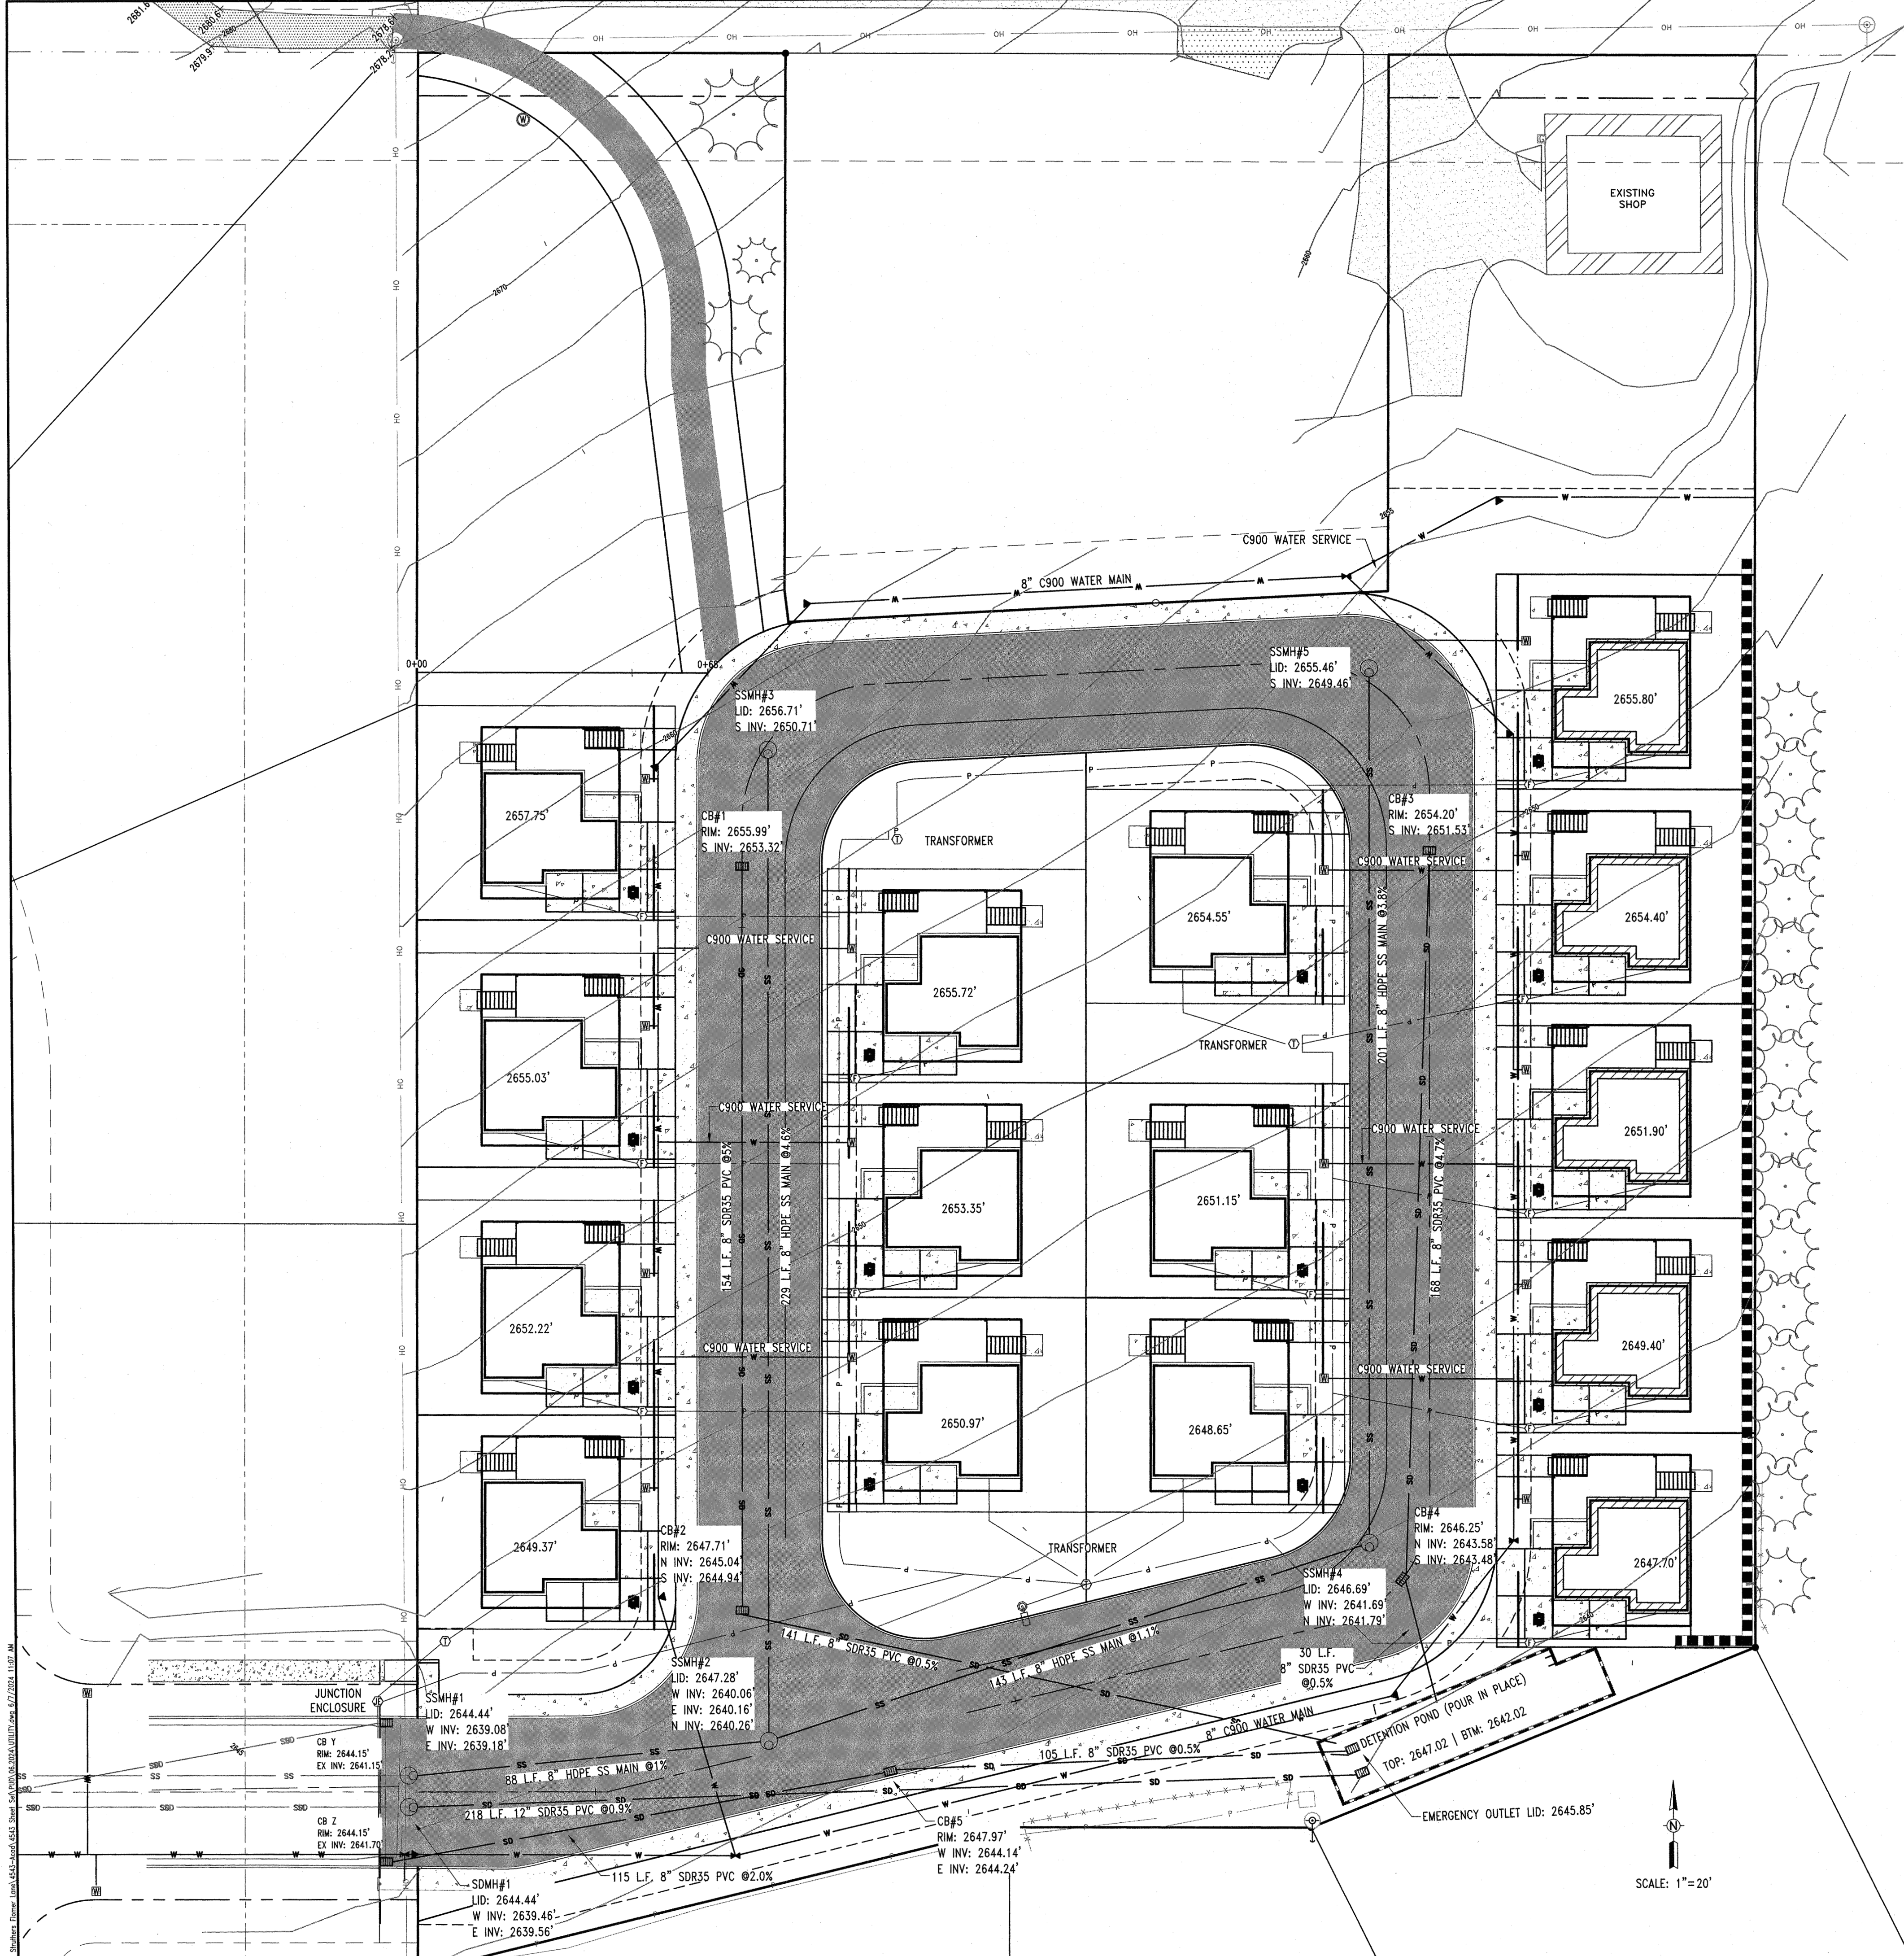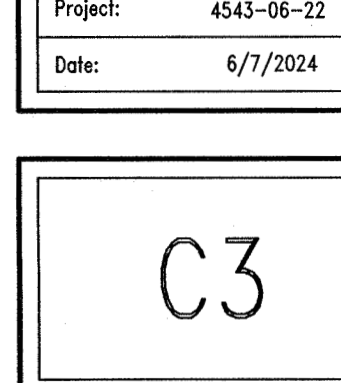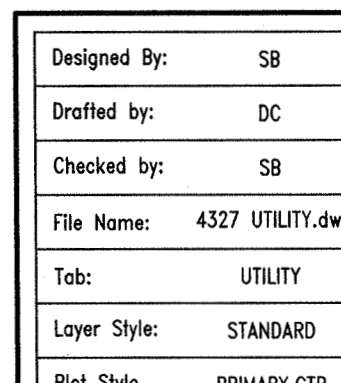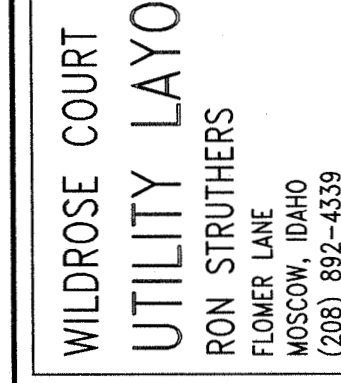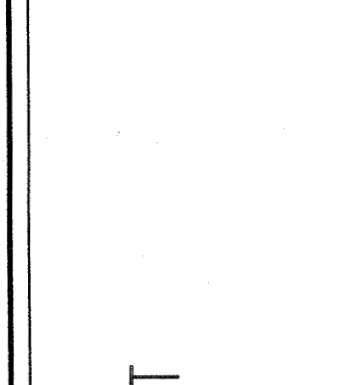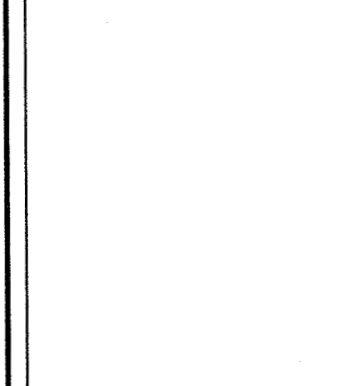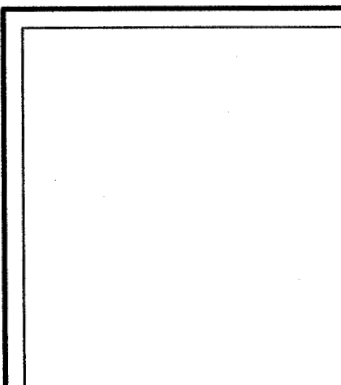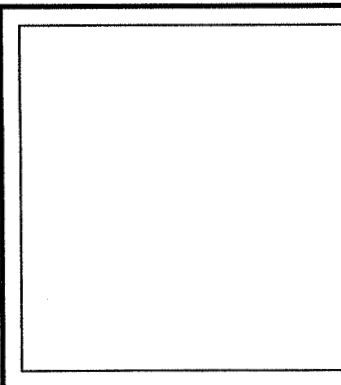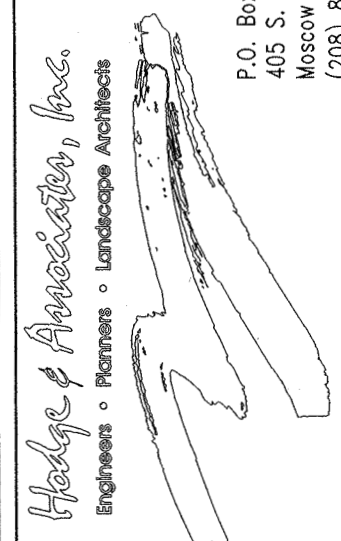

LEGEND	
	LOT NUMBER
	MANHOLE
	CATCH BASIN
	CLEAN OUT
	LIGHT POLE
	THRUST BLOCK
	WATER VALVE
	WATER METER
	POWER METER
	GAS METER
	BOUNDARY LINE
	BUILDING SETBACK
	WATER LINE
	SANITARY SEWER LINE
	STORM DRAIN LINE
	UNDERGROUND POWER LINE
	UNDERGROUND TELECOMMUNICATIONS LINE
	UNDERGROUND GAS LINE





Designed by:	SB
Drafted by:	DC
Checked by:	SB
File Name:	4327 UTILITY.dwg
Tab:	UTILITY
Layer Style:	STANDARD
Plot Style:	PRIMARY.ctb
Project:	4543-06-22
Date:	6/7/2024

C3



Know what's below.
Call before you dig.




Hodge & Associates, Inc.
Engineers • Planners • Landscape Architects
P.O. Box 8728
405 S. Washington Street
Moscow Idaho 83843
(208) 882-3520

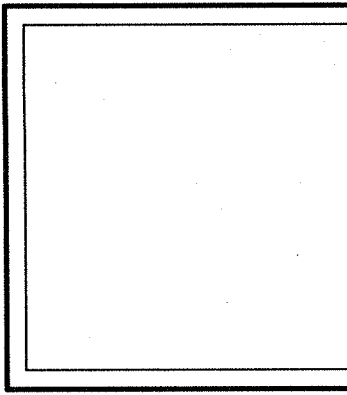

WILDROSE COURT
WALL PLAN AND PROFILE
RON STRUTHERS
FLOWER LANE
MOSCOW, IDAHO
(208) 882-4339


Designed by:	SB
Drafted by:	DC
Checked by:	SB
File Name:	4543 PUD WALL.dwg
Tab:	EAST WALL
Layer Style:	STANDARD
Plot Style:	PRIMARY.CTB
Project:	4543-06-22
Date:	6/7/2024

C4

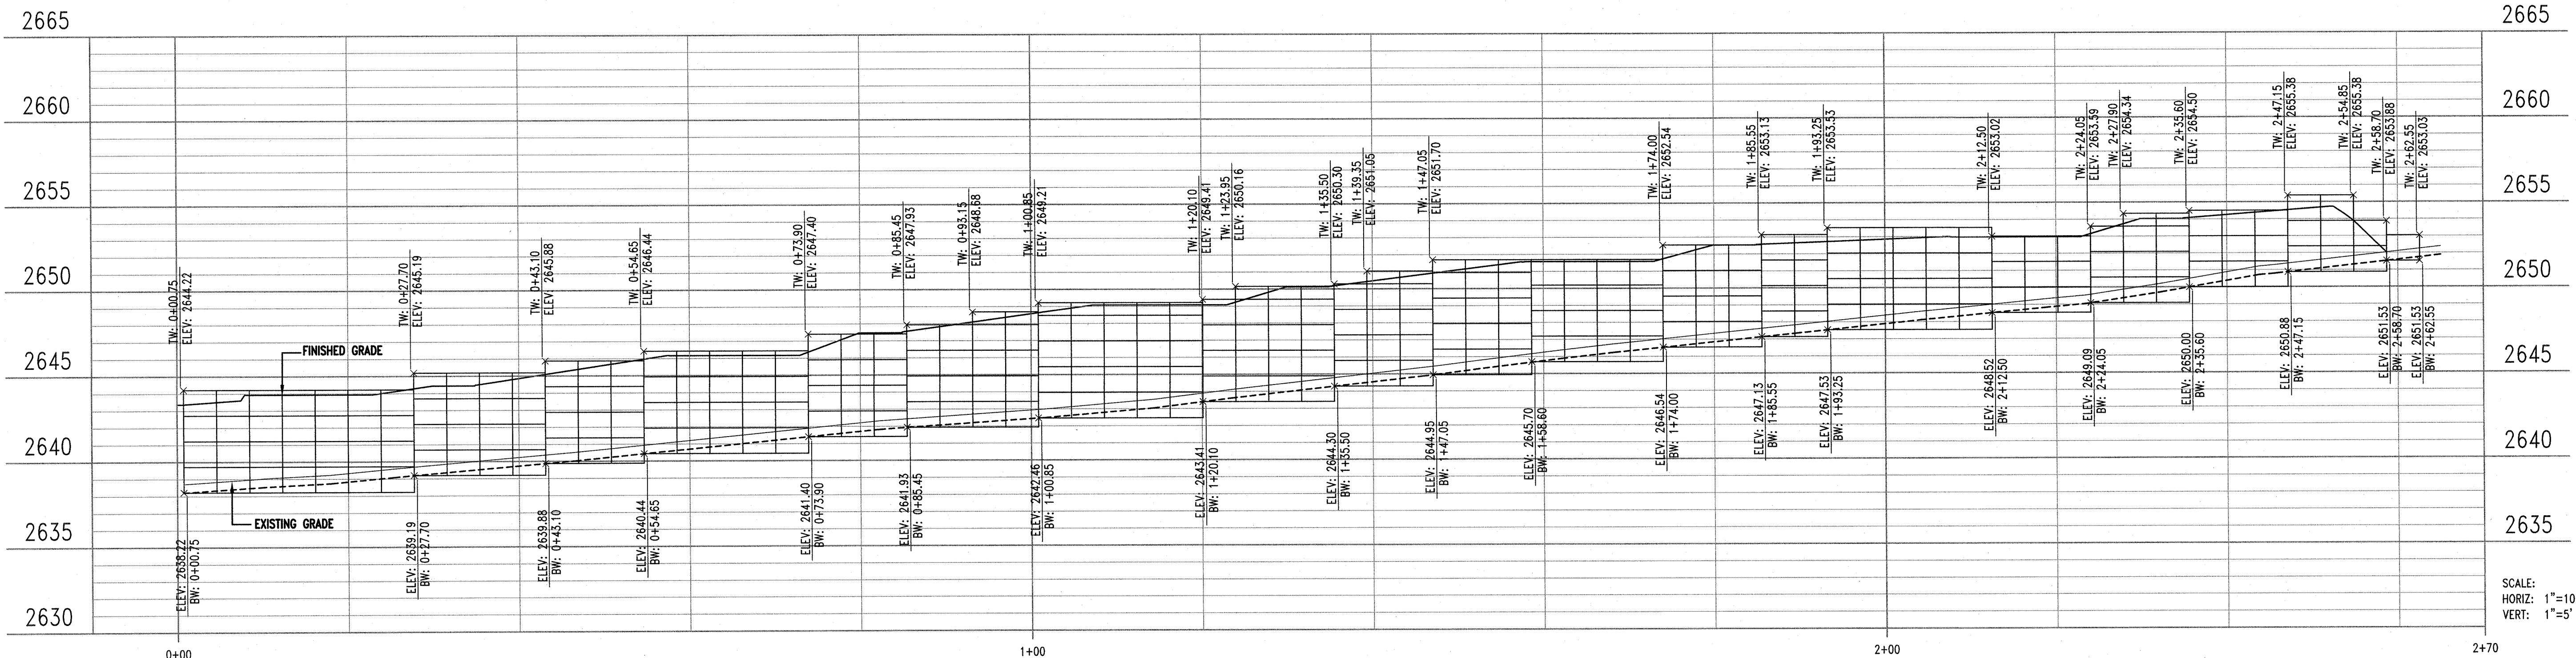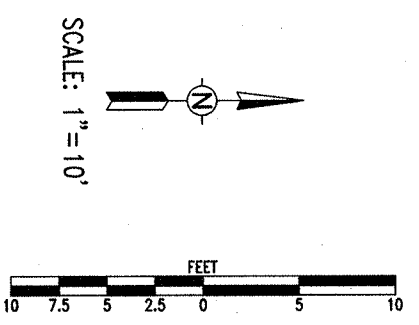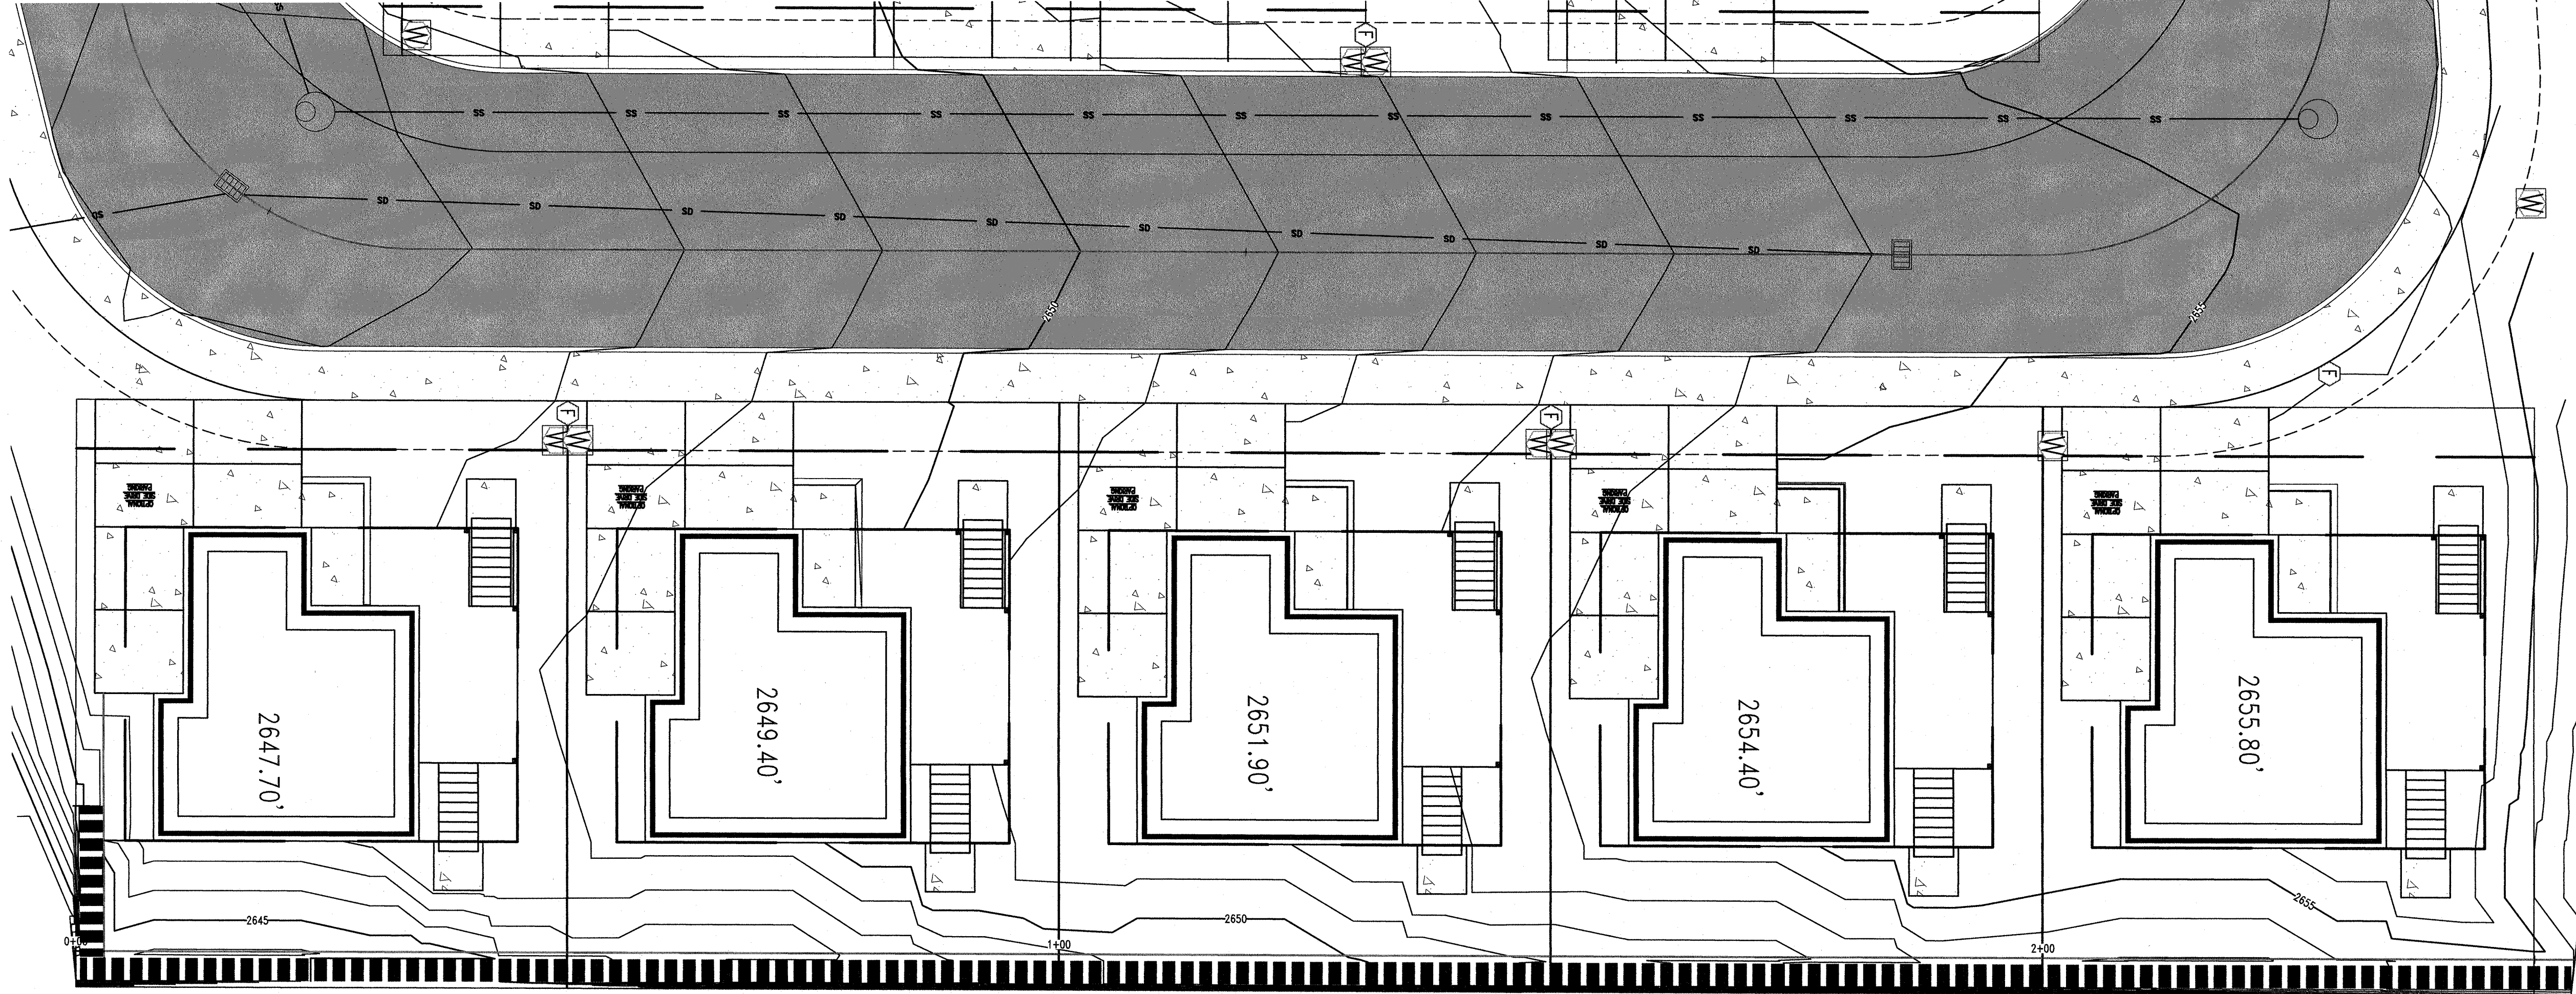


PLAN AND PROFILE: STA 0+00 THRU STA 2+62.55

- LEGEND
- TW TOP OF WALL
 - BW BOTTOM OF WALL
 - [Pattern] REDI-ROCK BLOCK
 - [Pattern] REDI-ROCK BLOCK (9" TOP)
 - STORM DRAIN LINE
 - 6" MINIMUM BURY DEPTH LINE
 - [Pattern] REDI-ROCK RETAINING WALL, SEE DETAIL C6

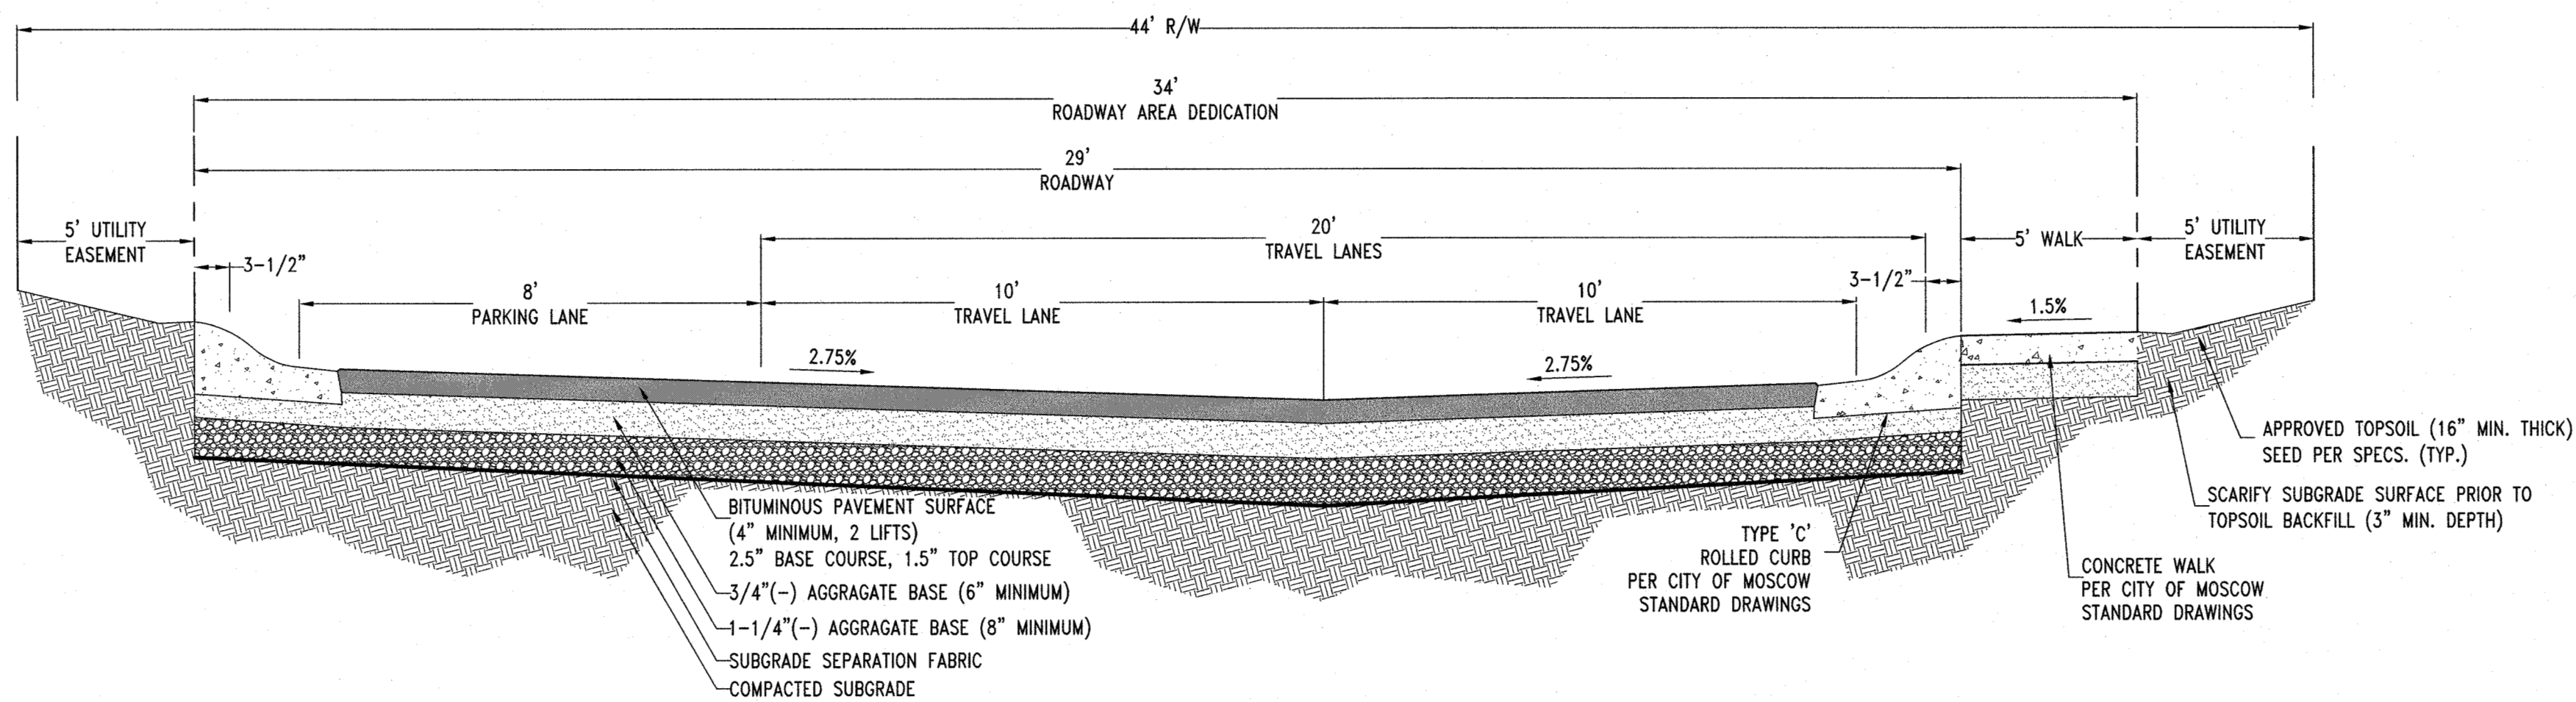

PUD ROADWAY

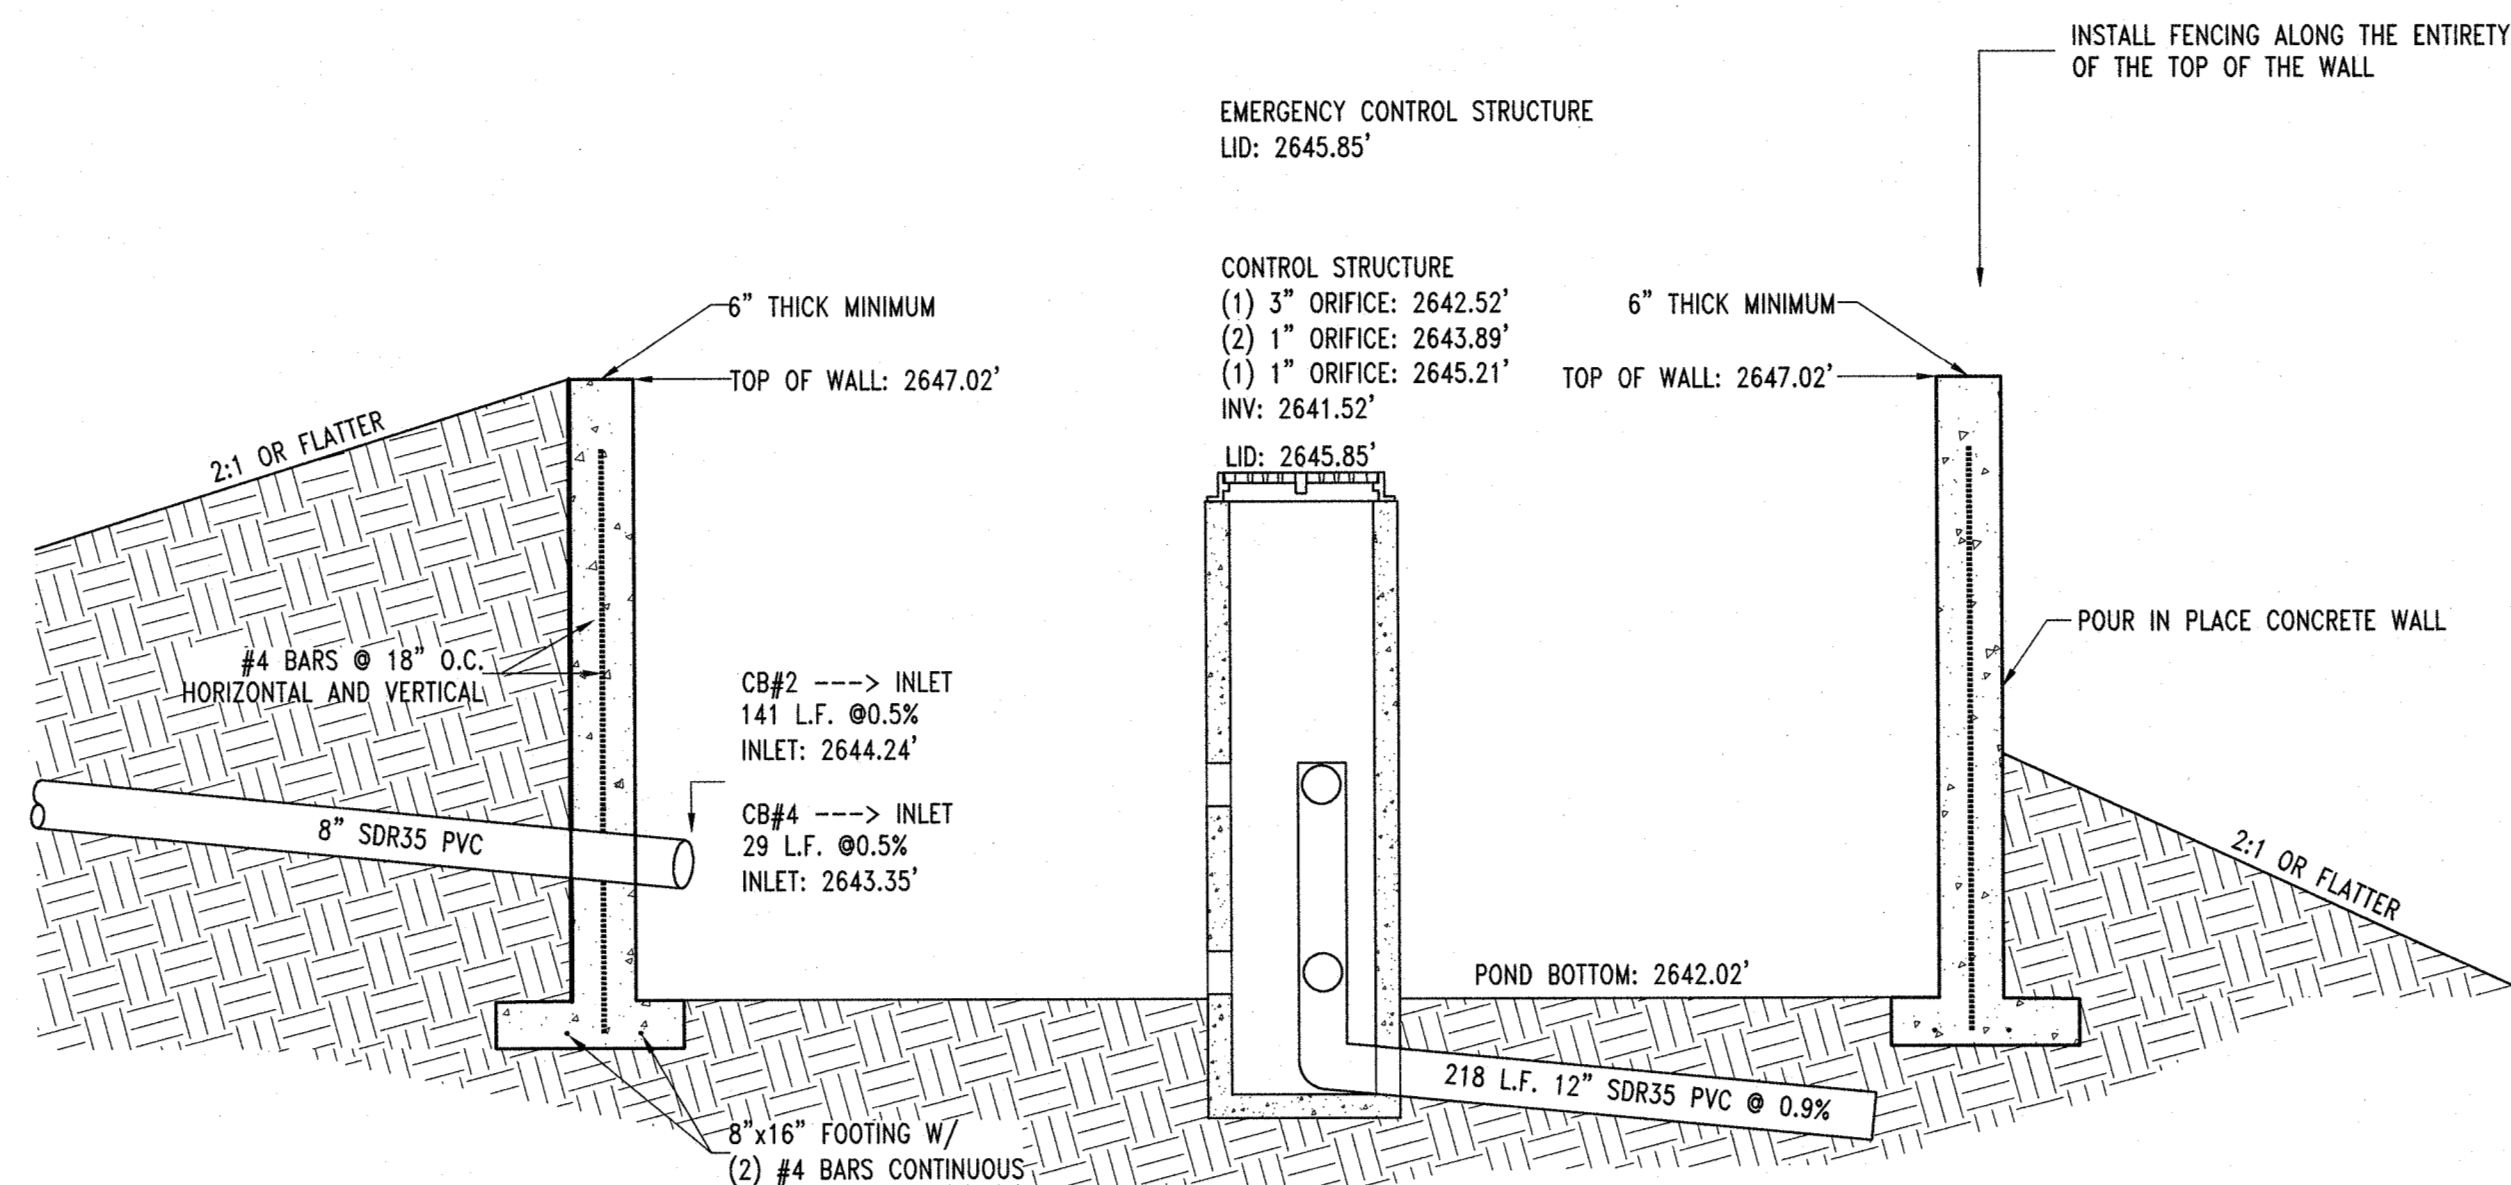NTS
1
C5

STORMWATER DETENTION POND

NTS
2
C5Know what's below.
Call before you dig.**GENERAL NOTES**

- ALL WORK TO BE IN ACCORDANCE WITH CITY OF MOSCOW STANDARDS.
- UNDERGROUND UTILITIES SHOWN ON THESE DRAWINGS ARE NOT GUARANTEED ACCURATE OR COMPLETE. CALL 811 FOR UTILITY LOCATES BEFORE BEGINNING CONSTRUCTION.
- ALL CONSTRUCTION MUST COMPLY WITH STATE OF IDAHO STANDARDS FOR DRINKING WATER SYSTEMS AND WITH THE STATE OF IDAHO DEPARTMENT OF ENVIRONMENTAL QUALITY CRITERIA FOR SEWAGE WORKS DESIGN.
- THE OWNER IS RESPONSIBLE FOR EROSION AND SEDIMENT CONTROL IN ACCORDANCE WITH ALL LOCAL, STATE, AND FEDERAL ORDINANCES, POLICIES AND LAWS. AN APPROVED EROSION CONTROL PLAN IS PROVIDED AS PART OF THESE CONSTRUCTION DRAWINGS.
- MAXIMUM DENSITY AND OPTIMUM MOISTURE CONTENT WILL BE DETERMINED USING AASHTO 199 EXCEPT AS NOTED. IN PLACE DENSITY AND MOISTURE CONTENT SHALL BE DETERMINED BY ASTM D 2922 (NUCLEAR DENSOMETER).
- THE DEVELOPER'S ENGINEER TO FURNISH DESCRIPTIONS FOR ALL PUBLIC UTILITY EASEMENTS OUTSIDE THE BOUNDARY OF THE PLAT. THE CITY WILL PREPARE THE EASEMENT DOCUMENTS.

ROADWAY

- ALL BACKFILL AND SUBGRADE IN PUBLIC STREET SECTION SHALL BE COMPACTED TO 95% OF MAXIMUM DENSITY.
- SEE TYPICAL SECTION 1, 2, & 3 THIS SHEET. PLACE COMBINATION CURB AND GUTTER, (SEE DWG #6 CITY OF MOSCOW STANDARD DRAWINGS) ON ALL PUBLIC STREETS.
- ADJUST ALL MANHOLES AND WATER VALVE BOXES TO FINISHED GRADE PRIOR TO PAVING.
- ALL OFFSET DIMENSIONS ARE FROM INDICATED STATION LINES UNLESS OTHERWISE NOTED.
- STREET MONUMENTS SHALL BE SET BY ENGINEER IN CASINGS PROVIDED AND SET BY CONTRACTOR. ENGINEER SHALL MARK LOCATION OF CASINGS FOR CONTRACTOR.
- ALL CUT OR FILL SLOPES ON STREET RIGHTS-OF-WAY SHALL BE MULCHED TO PREVENT EROSION. SEE EROSION CONTROL PLAN, SHEET C2.
- ALL CURB RADII AT INTERSECTIONS TO BE 25 FEET, PER CITY STANDARD, UNLESS SPECIFICALLY NOTED OTHERWISE.

STORM & SANITARY SEWER

- THE CITY OF MOSCOW IS OPERATOR OF WATER AND SEWER FACILITIES SERVING THIS DEVELOPMENT.
- ALL TRENCH AND FOUNDATION EXCAVATIONS GREATER THAN FOUR FEET DEEP SHALL HAVE SLOPES OF 1.5:1 (HORIZONTAL TO VERTICAL) OR, BRACING OR SHORING SHALL BE PROVIDED IN ACCORDANCE WITH OSHA AND OTHER APPROPRIATE LOCAL CODES.
- ALL SATURATED, LOOSE, OR DISTURBED SOIL SHALL BE REMOVED FROM THE BOTTOM OF UTILITY TRENCHES PRIOR TO PLACEMENT OF PIPE BEDDING. PIPE BEDDING AND TRENCH BACKFILL SHALL BE PLACED IN ACCORDANCE WITH CITY OF MOSCOW STANDARDS.
- SEWER STUBS SHALL BE INSTALLED AT A MINIMUM SLOPE OF 1/4" PER FOOT, AND CONNECTED TO MAINS USING MANUFACTURED WYES.
- SANITARY SEWER STUBS SHALL BE TERMINATED BY PROVIDING AN ELBOW AND CAPPED RISER TO 12" MINIMUM ABOVE FINISHED GRADE. TERMINATE AT PROPERTY LINE. MATERIAL SHALL BE GREEN (SDR 35) PVC. WRAP 'SEWER' LOCATE TAPE ON ENDS; TAPE FURNISHED BY CONTRACTOR.
- FOUNDATION DRAIN STUBS SHALL BE TERMINATED BY PROVIDING AN ELBOW & CAPPED RISER TO 12" MINIMUM ABOVE GRADE. TERMINATE AT PROPERTY LINE. MATERIAL SHALL BE WHITE PVC. WRAP 'STORM SEWER' LOCATE TAPE ON ENDS; TAPE FURNISHED BY CONTRACTOR.
- ALL STORM AND SANITARY SEWER LINES SHALL HAVE 2.0' MINIMUM COVER.
- USE ECCENTRIC CONES EXCEPT WHEN SPECIFICALLY APPROVED BY THE ENGINEER. PLACE THE CONE ENTRY HOLE ABOVE THE OUTLET PIPE. FLAT TOPS ARE NOT ALLOWED WITHOUT APPROVAL OF THE ENGINEER.
- SANITARY SEWER PIPE (SS): ALL SS PIPE TO BE SDR 35, PVC (GREEN), UNLESS OTHERWISE NOTED.
- STORM SEWER PIPE (SD): ALL SD PIPE TO BE SDR 35, PVC (WHITE), UNLESS OTHERWISE NOTED.

WATER

- WATER SERVICES SHALL BE DUG AND INSTALLED BY CONTRACTOR AT OWNER'S EXPENSE. CITY CREW WILL MAKE TAP TO MAIN. ALL WATER SERVICE MATERIALS FURNISHED BY CITY.
- ALL WATER SERVICES SHALL BE INSPECTED BY THE CITY PRIOR TO BACKFILLING TRENCHES.
- INSTALL "LOCATE" TAPE 18" ABOVE PIPE AND #10 LOCATE WIRE DIRECTLY ABOVE PIPE IN PVC WATER LINE TRENCH. REFER TO DETAIL, THIS SHEET.
- HYDROSTATIC TESTING AND DISINFECTION OF WATER MAINS SHALL BE DONE IN ACCORDANCE WITH CITY OF MOSCOW STANDARDS. THE CONTRACTOR SHALL REQUEST PIPE TESTING AT LEAST 48 HOURS IN ADVANCE OF THE TIME ACTUAL TESTS SHALL BE PERFORMED.
- BACK FLOW DEVICES SHALL BE PROVIDED PER CITY CODES AND POLICIES.
- FIRE HYDRANTS SHALL BE PLACED WITH THE STEAMER PORT FACING THE STREET OR DRIVEWAY AS APPROPRIATE AND SHALL BE MAINTAINED CLEAR AND ACCESSIBLE FOR FIRE PROTECTION DURING CONSTRUCTION. NO OBSTRUCTIONS SHALL BE PLACED WITHIN THREE FEET OF THE FIRE HYDRANT.
- WATER PIPE: ALL WATER MAINS TO BE C 900 CLASS 150 PVC, UNLESS OTHERWISE NOTED.

SEPARATION OF WATER AND SEWER

- WATER AND SEWER (SANITARY OR STORM) MAINS SHALL BE SEPARATED BY A HORIZONTAL DISTANCE NO LESS THAN TEN (10) FEET. IN ANY INSTANCE WHERE SUCH SEPARATION IS NOT ACHIEVABLE, THE FOLLOWING STANDARDS SHALL BE MET:
 - THE WATER AND SEWER MAINS SHALL BE SEPARATED BY AT LEAST SIX (6) HORIZONTAL FEET MEASURED BETWEEN THE OUTSIDE WALLS OF THE PIPES, AND THE SEWER MAIN SHALL BE CONSTRUCTED TO WATER MAIN STANDARDS AT ALL SUCH POINTS; AND
 - THE WATER MAIN SHALL BE A MINIMUM OF EIGHTEEN (18) INCHES ABOVE THE SEWER MAIN.
- THE REQUIREMENTS FOR THE VERTICAL SEPARATION OF WATER AND SEWER MAINS ARE AS FOLLOWS:
 - AT ANY POINT WHERE THE SEWER AND WATER MAINS CROSS, THEY SHALL BE SEPARATED BY A VERTICAL DISTANCE OF NO LESS THAN EIGHTEEN (18) INCHES.
 - AT ANY POINT WHERE THE SEWER MAIN CROSSES ABOVE THE WATER MAIN THE SEWER MAIN SHALL BE SUPPORTED TO MAINTAIN LINE & GRADE.
 - AT ANY POINT WHERE THE SEWER AND WATER MAIN CROSS, THE CROSSING SHALL BE ARRANGED SO THAT THE WATER MAIN JOINTS WILL BE EQUAL DISTANCE AND AS FAR AS POSSIBLE FROM THE SEWER MAIN JOINTS.
 - IF THE WATER MAIN IS BELOW THE SEWER MAIN, THE SEWER MAIN SHALL BE CONSTRUCTED OF MATERIALS CONFORMING TO WATER MAIN STANDARDS AND PRESSURE TESTED TO 150 PSI TO ASSURE WATER TIGHTNESS PRIOR TO BACKFILLING IF THE EIGHTEEN (18) INCH VERTICAL SEPARATION CANNOT BE MAINTAINED.
 - IN LIEU OF CONSTRUCTING (OR RECONSTRUCTING) A NON-POTABLE WATER MAIN DUE TO LESS THAN EIGHTEEN (18) INCHES OF VERTICAL SEPARATION FROM A POTABLE WATER MAIN, EITHER THE NON-POTABLE MAIN OR THE POTABLE WATER MAIN MAY BE ENCASED WITH A SLEEVING MATERIAL ACCEPTABLE TO DEQ FOR A DISTANCE OF TEN (10) HORIZONTAL FEET ON BOTH SIDES OF THE CROSSING.

WILDROSE COURT
GENERAL NOTES AND DETAILS
RON STRUTHERS
FLOWER LANE
MOSCOW, IDAHO
(208) 882-4339

Designed By:	SB
Drafted by:	DC
Checked by:	SB
File Name:	4543 PUD DETAIL.dwg
Tab:	DETAIL
Loyer Style:	STANDARD
Plot Style:	PRIMARY.CTB
Project:	4543-06-22
Date:	6/7/2024




C5



Know what's **below**.
Call before you dig.

Hodge & Associates, Inc.

P.O. Box 8728
405 S. Washington Street
Moscow Idaho 83843

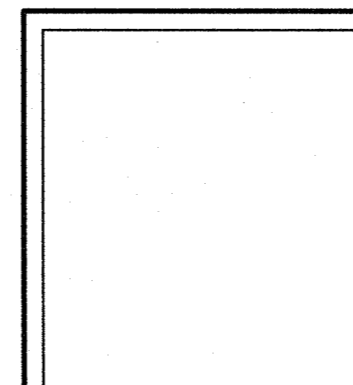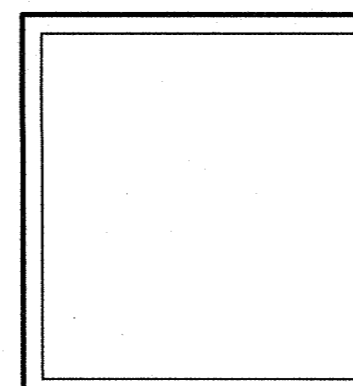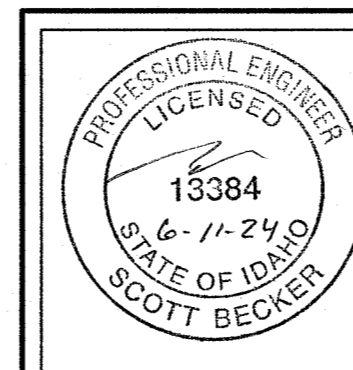


WILDRSE COURT
WALL DETAIL
IRON STRUTTERS
FLOWER LANE
MOSCOW, IDAHO
(208) 892-4339

Designed By:	SB
Drafted by:	DC
Checked by:	SB
File Name:	4543 PUD DETAIL...
Tab:	WALL DETAIL
Layer Style:	STANDARD
Plot Style	PRIMARY.CTB
Project:	4543-06-22
Date:	6/11/2024

C6

5 BLOCK HIGH SECTION


- (1) 9" (230 mm) Block
(1) 28" (710 mm) Block
(3) 41" (1030 mm) Blocks

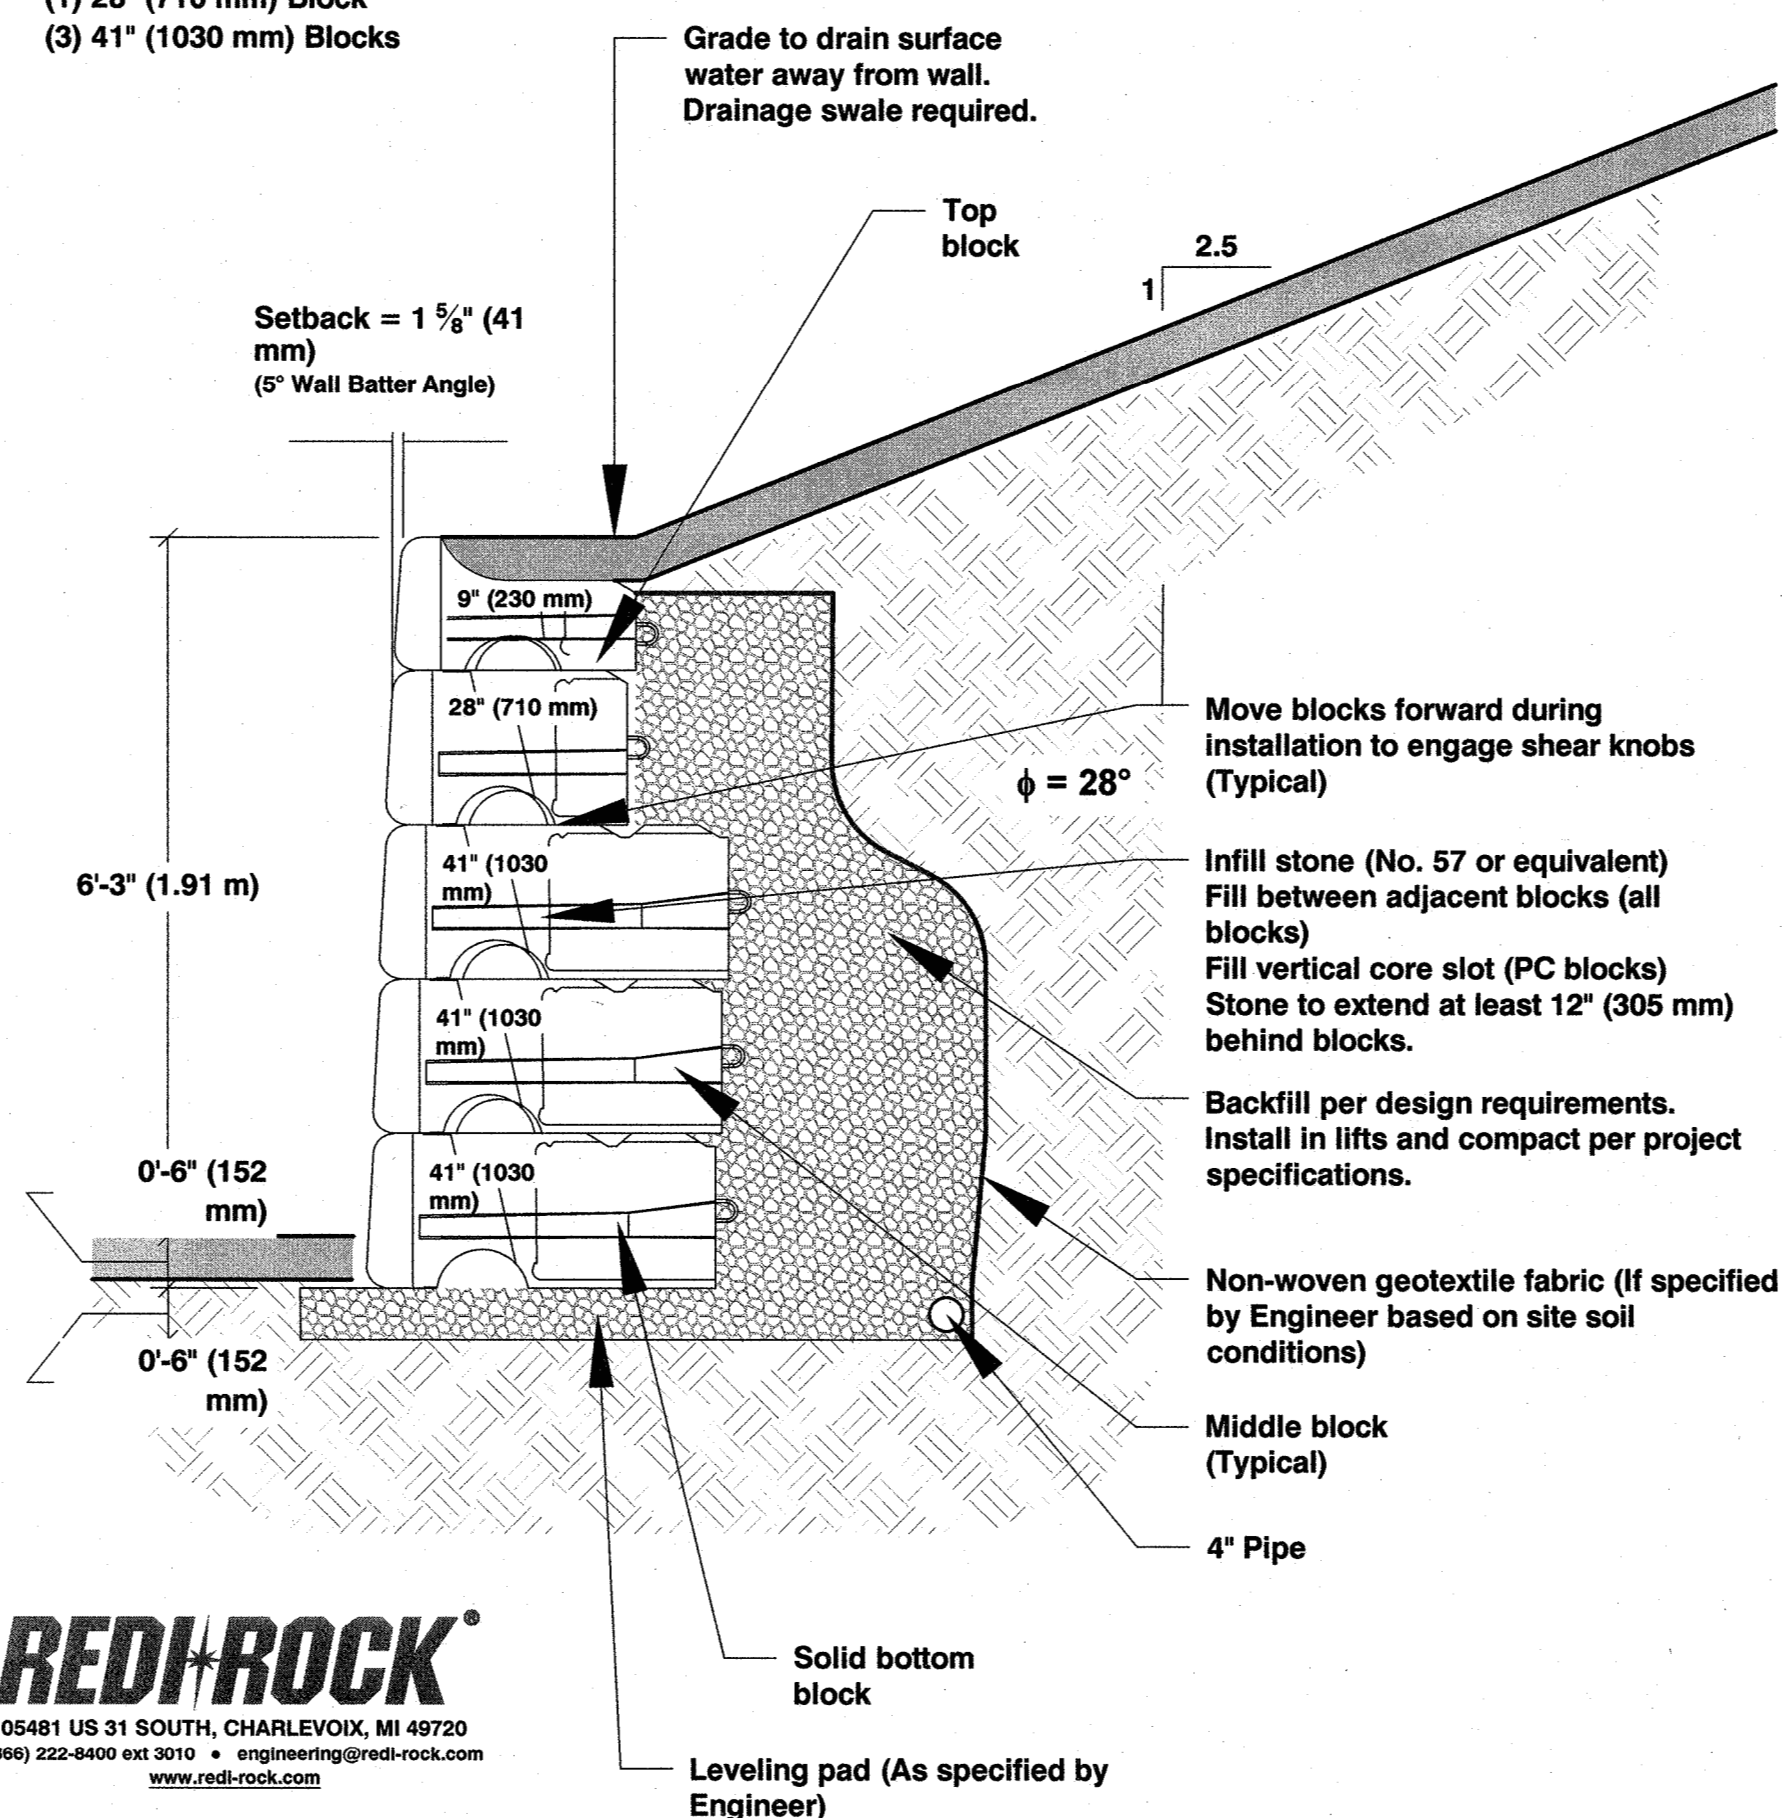

REDI ROCK WALL: 5 BLOCK SECTION

4 BLOCK HIGH SECTION


- (1) 28" (710 mm) Block
(3) 41" (1030 mm) Blocks

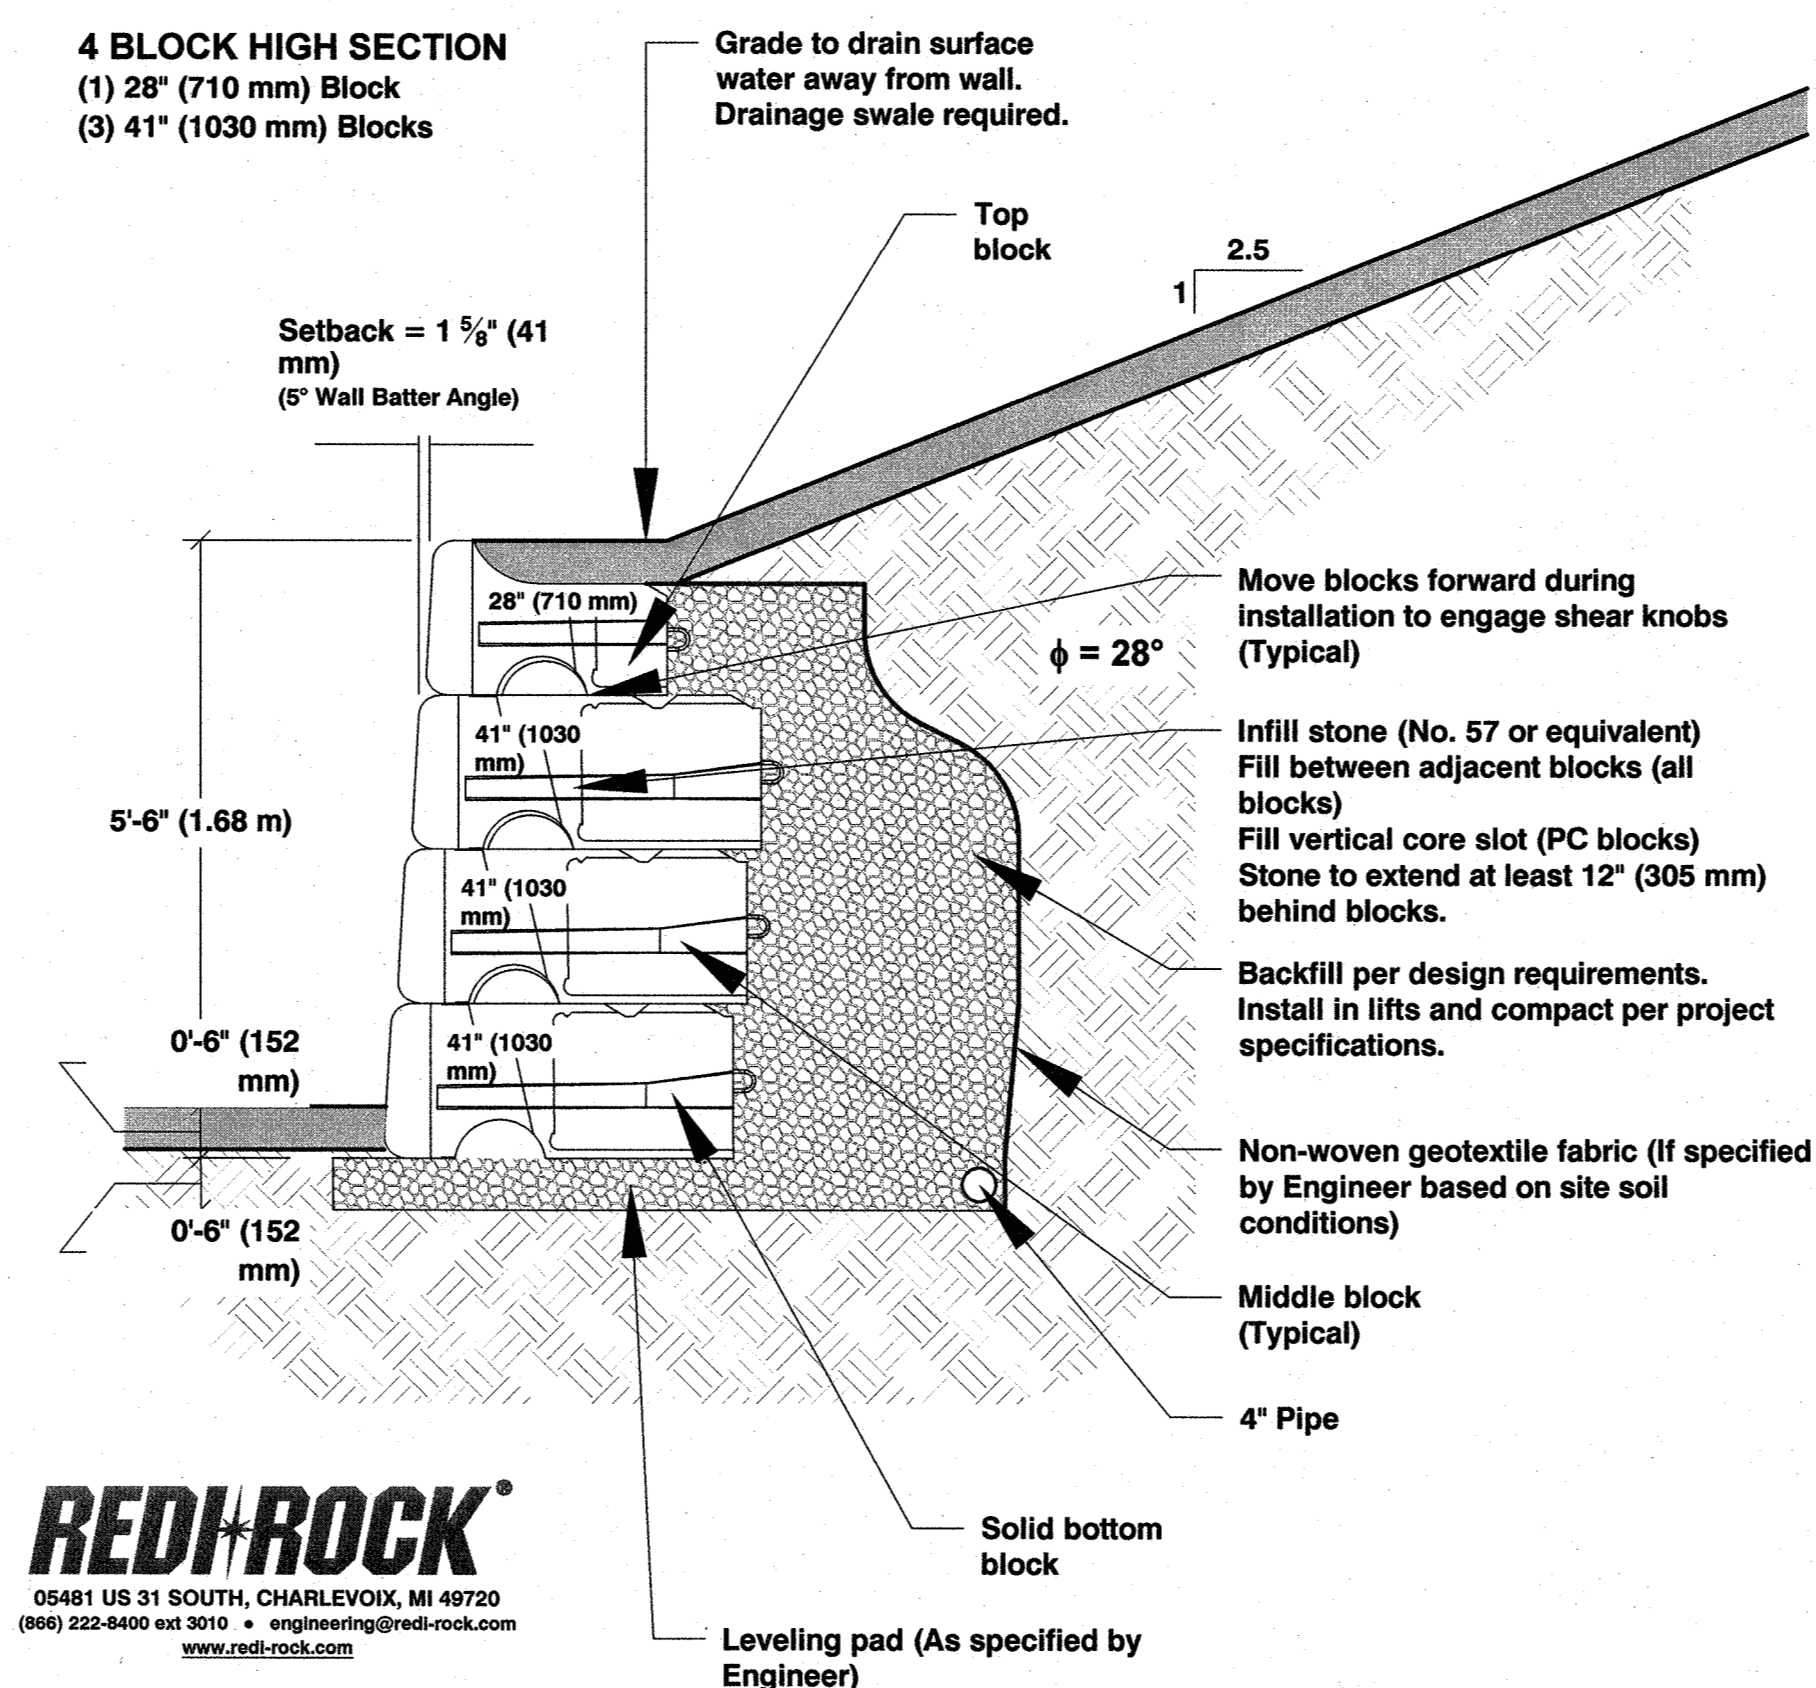


REDI ROCK WALL: 4 BLOCK SECTION


3 BLOCK HIGH SECTION

- (1) 28" (710 mm) Block
(2) 41" (1030 mm) Blocks

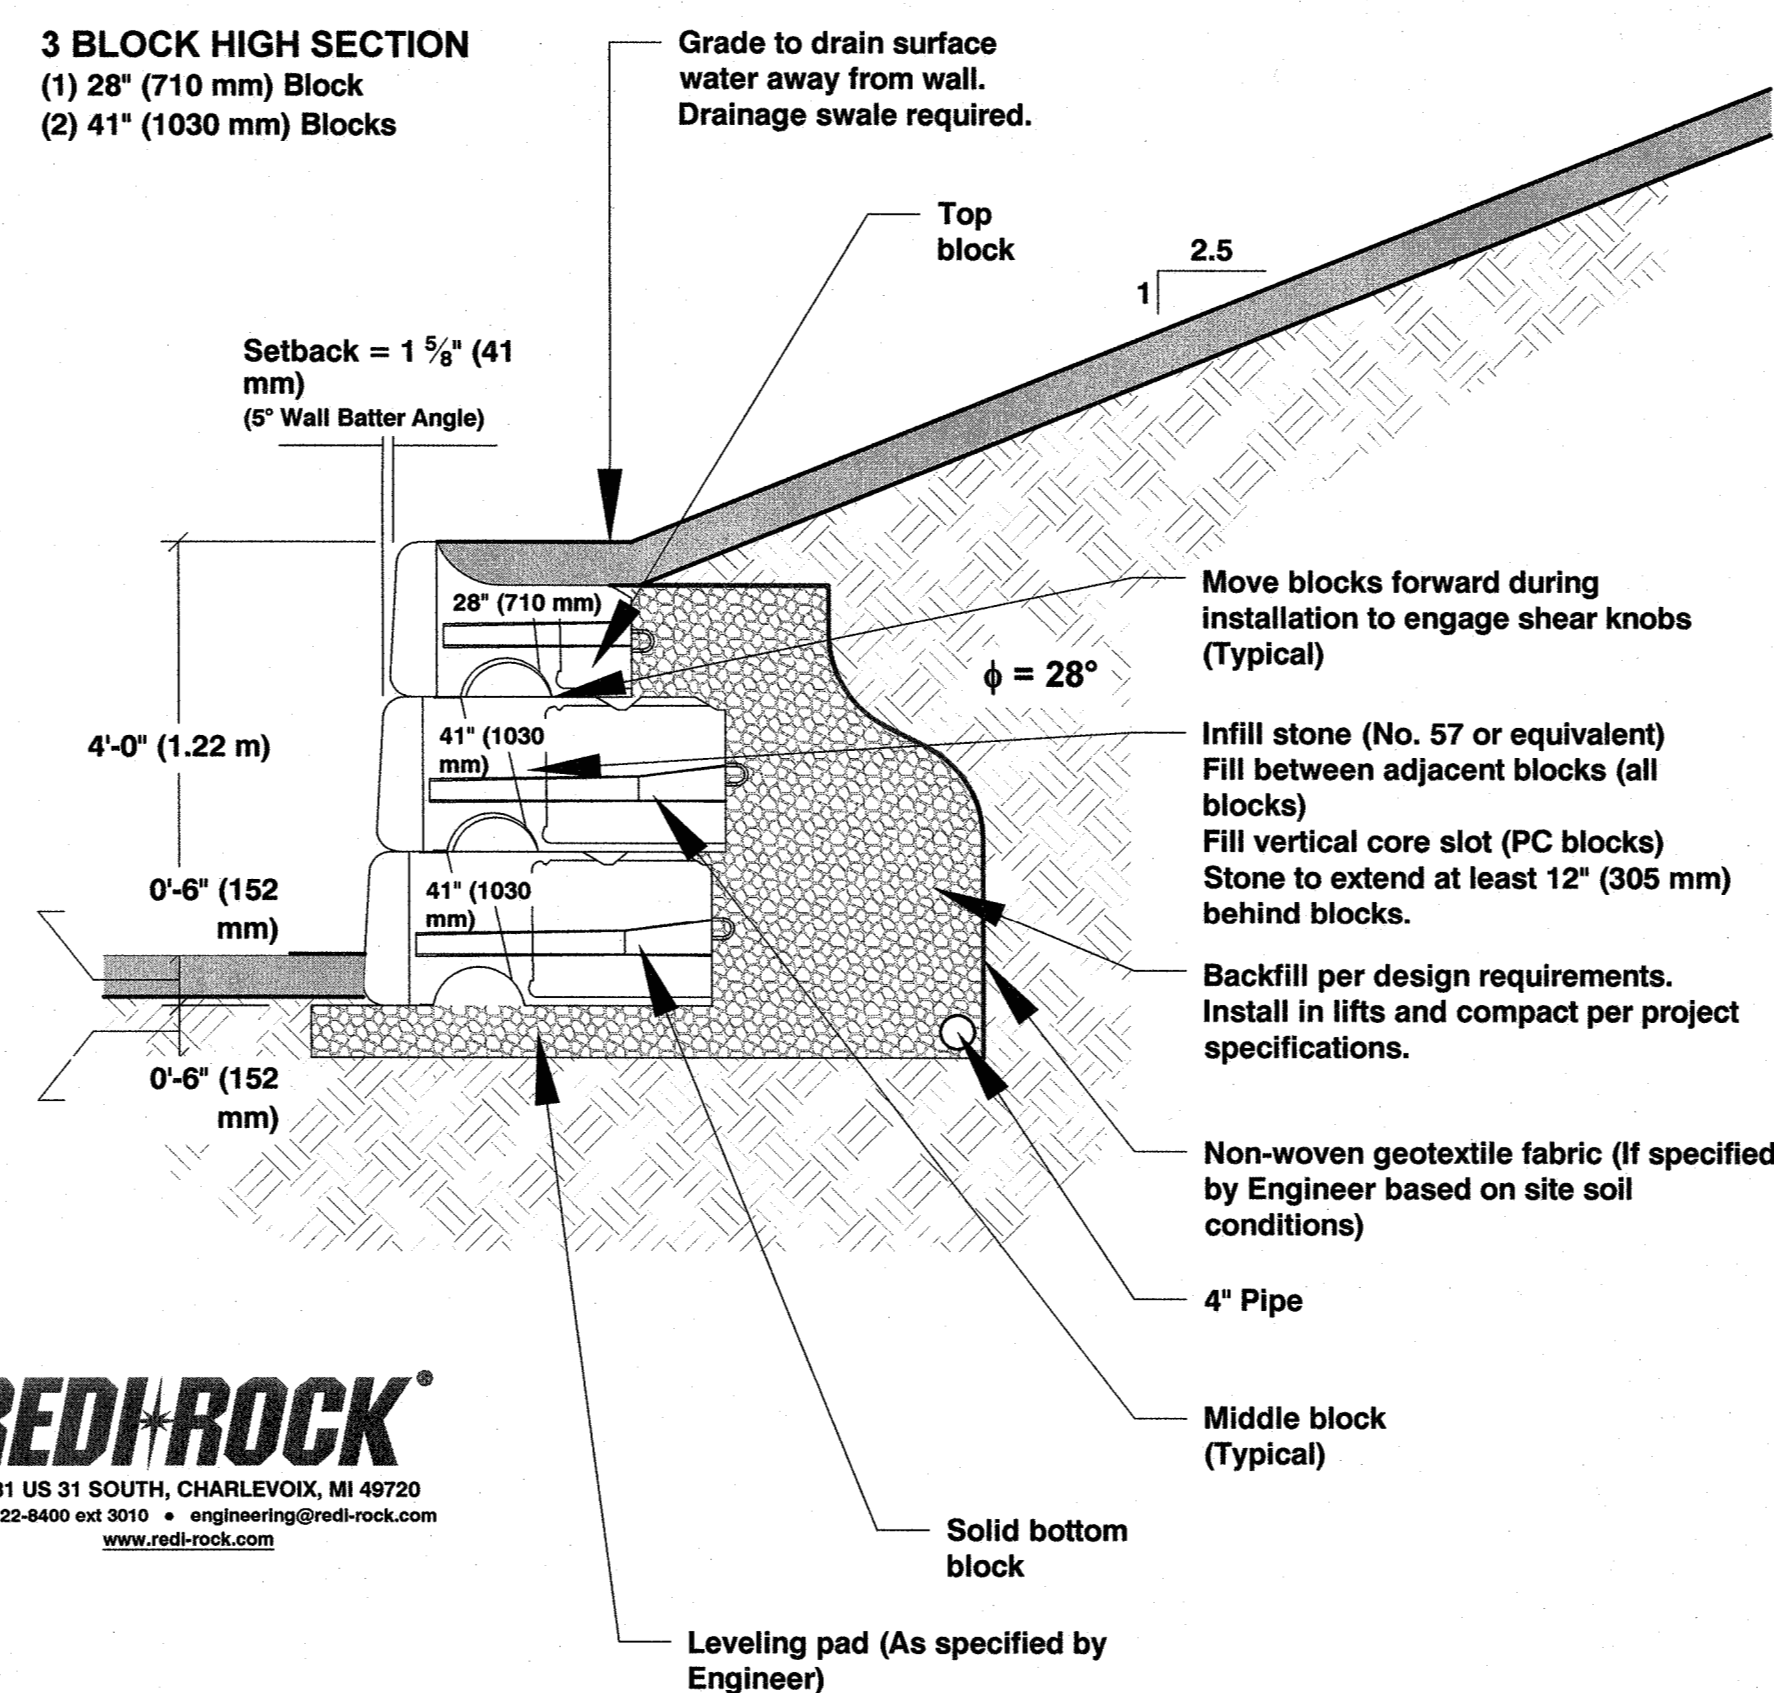

REDI ROCK WALL: 3 BLOCK SECTION

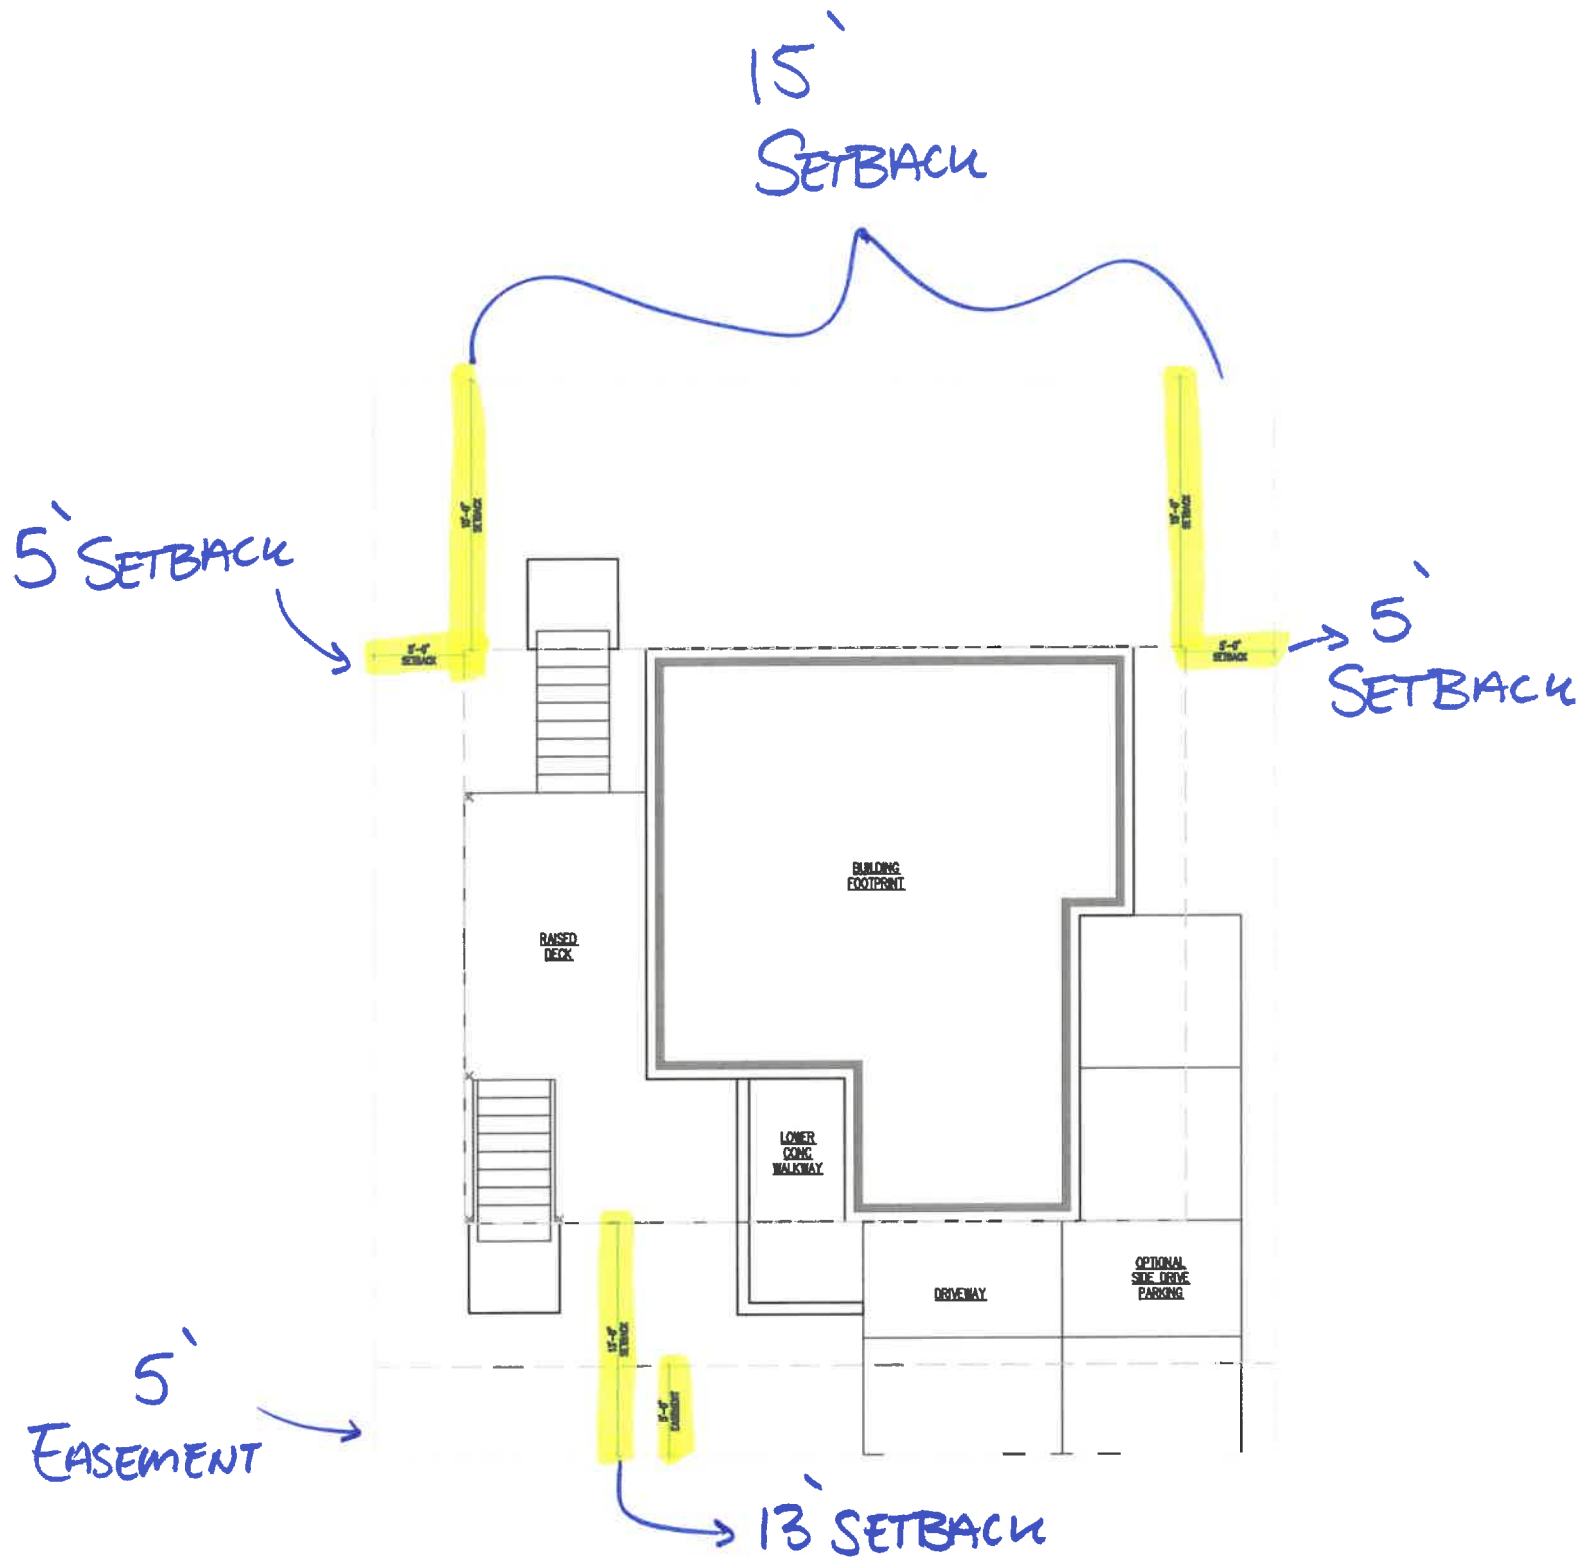

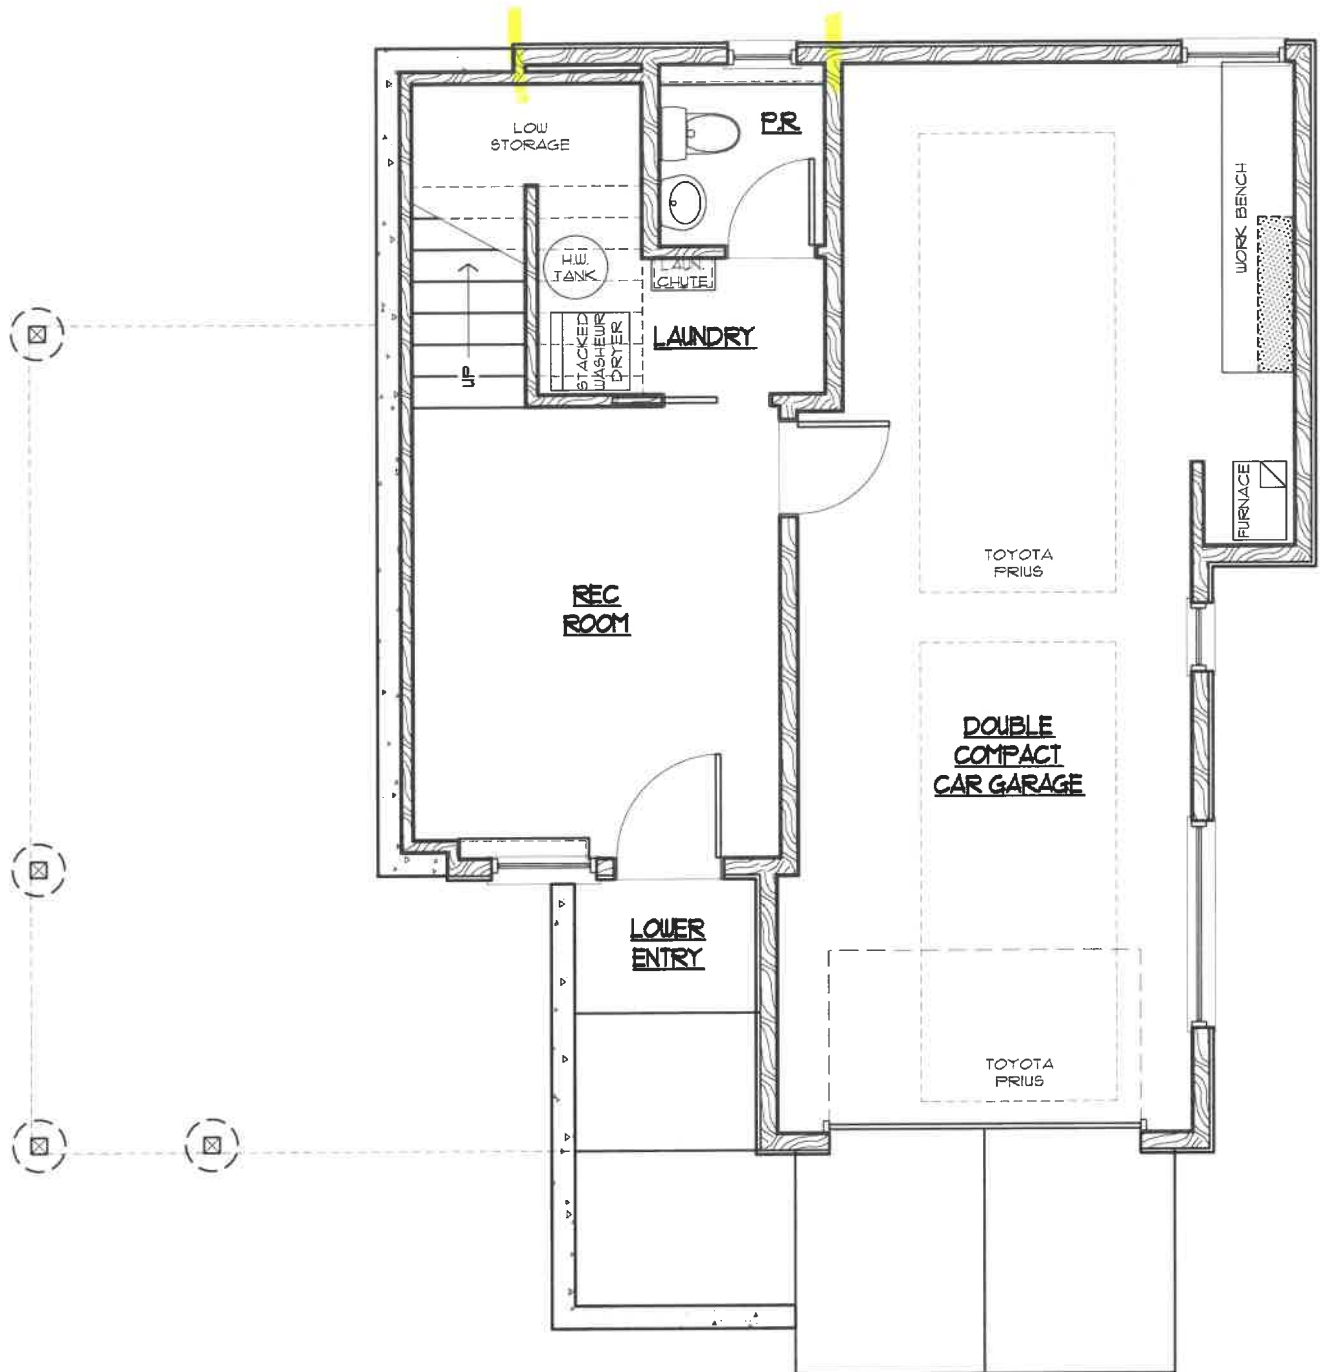


Wildrose Cottage

Lower Level - Option A

SCALE: 3/16" = 1'-0"

THESE DRAWINGS ARE
COPYRIGHTED BY THE DESIGN
PROFESSIONAL JOHN M. PAUL
AND ARE NOT SUITABLE FOR
USE WITHOUT THE APPROVAL
AND PARTICIPATION OF THE
DESIGN PROFESSIONAL

Gross Area ~ 248 SF

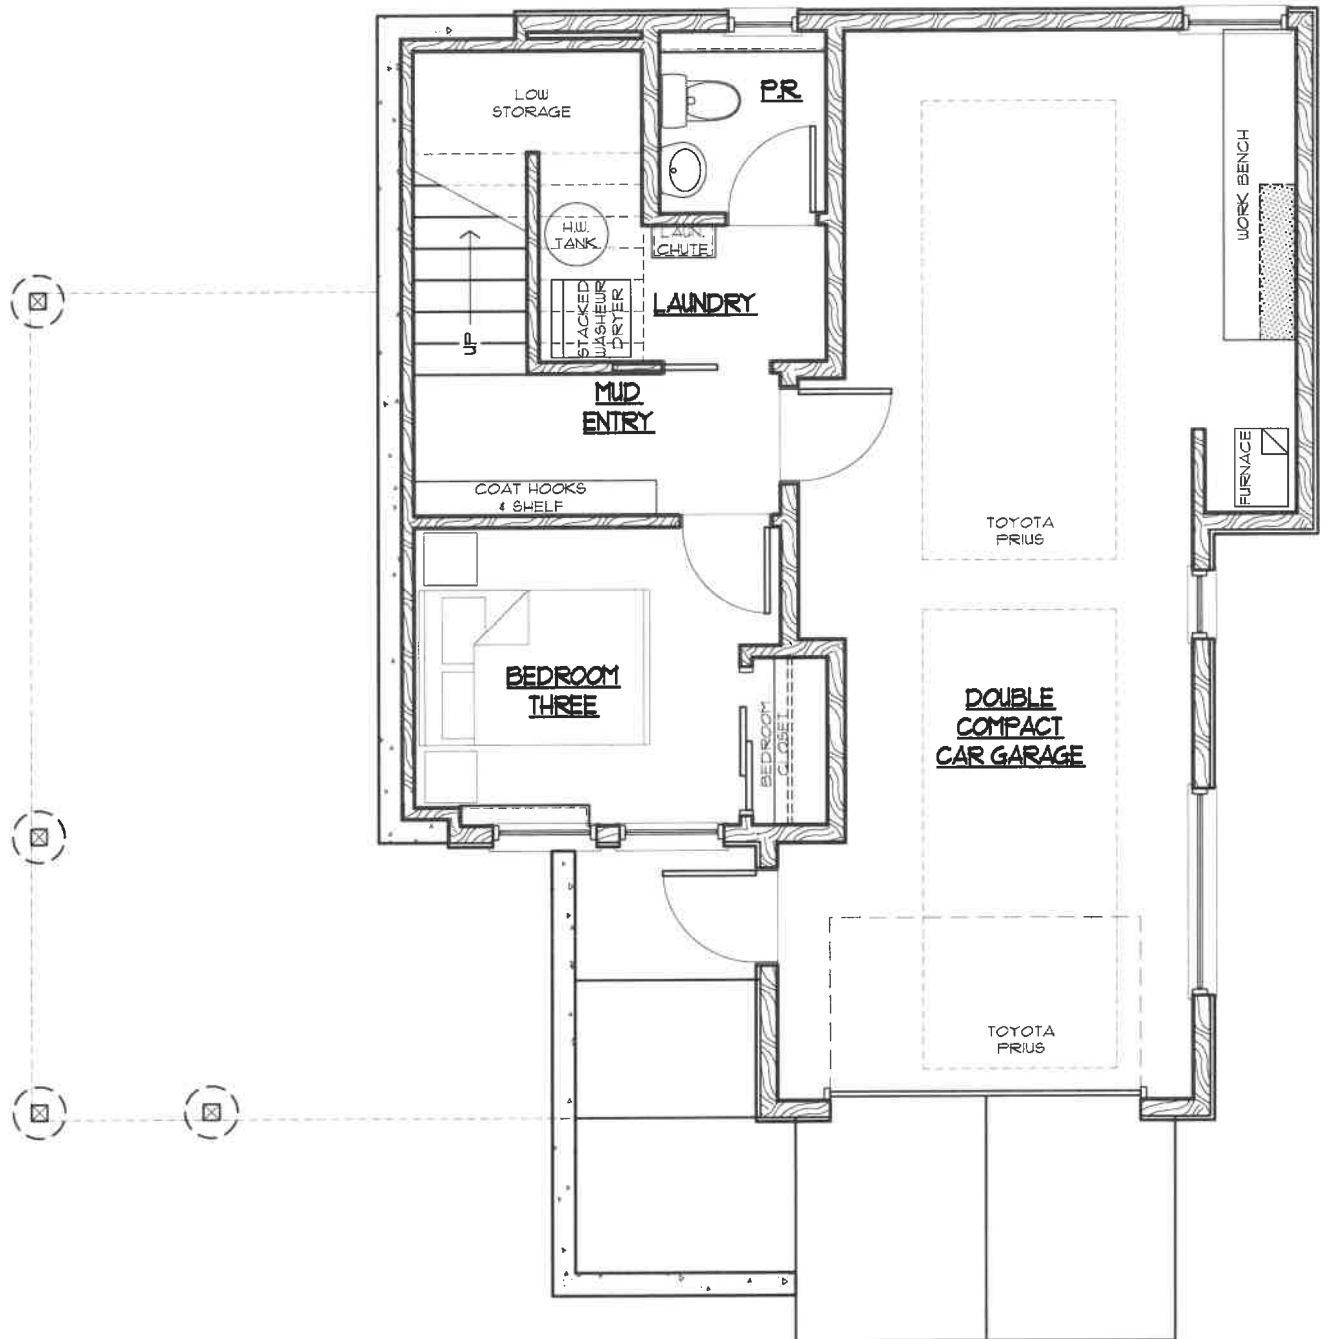


Wildrose Cottage

Lower Level - Option B

SCALE: 3/16" = 1'-0"

Gross Area ~ 256 SF

THESE DRAWINGS ARE
COPYRIGHTED BY THE DESIGN
PROFESSIONAL JOHN M. PAUL
AND ARE NOT SUITABLE FOR
USE WITHOUT THE APPROVAL
AND PARTICIPATION OF THE
DESIGN PROFESSIONAL

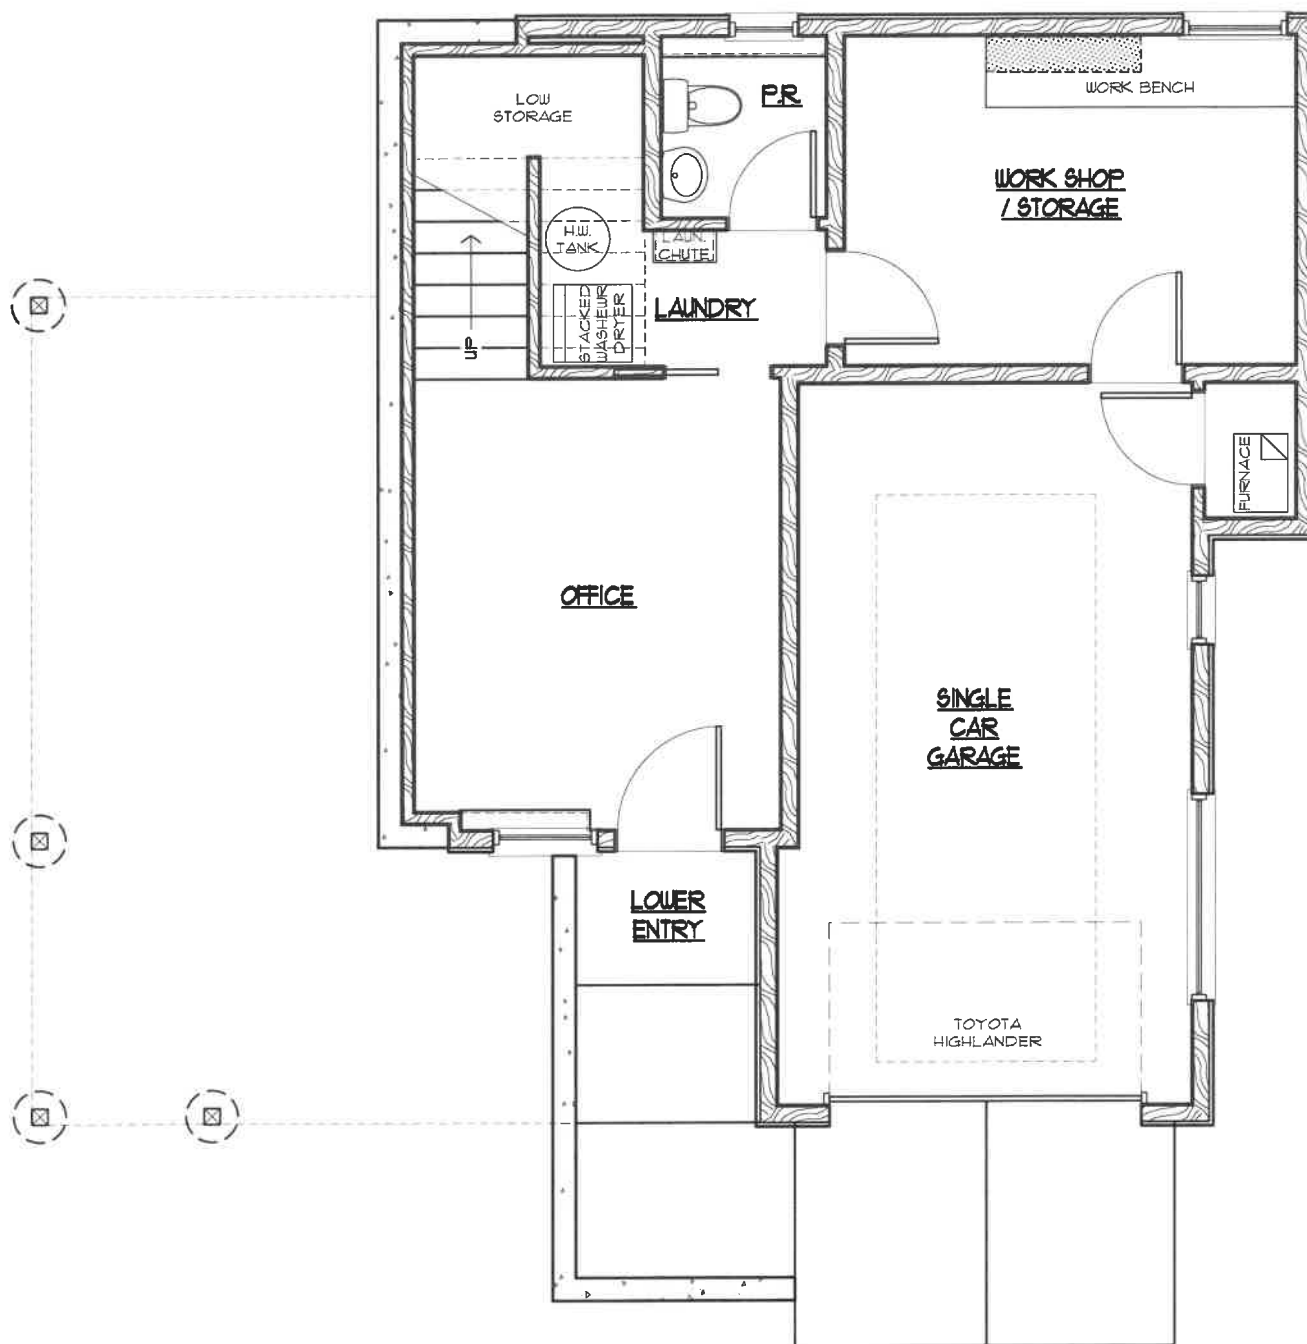


Wildrose Cottage Lower Level - Option C

SCALE: 3/16" = 1'-0"

THESE DRAWINGS ARE
COPYRIGHTED BY THE DESIGN
PROFESSIONAL JOHN M. PAUL
AND ARE NOT SUITABLE FOR
USE WITHOUT THE APPROVAL
AND PARTICIPATION OF THE
DESIGN PROFESSIONAL

Gross Area - 392 SF

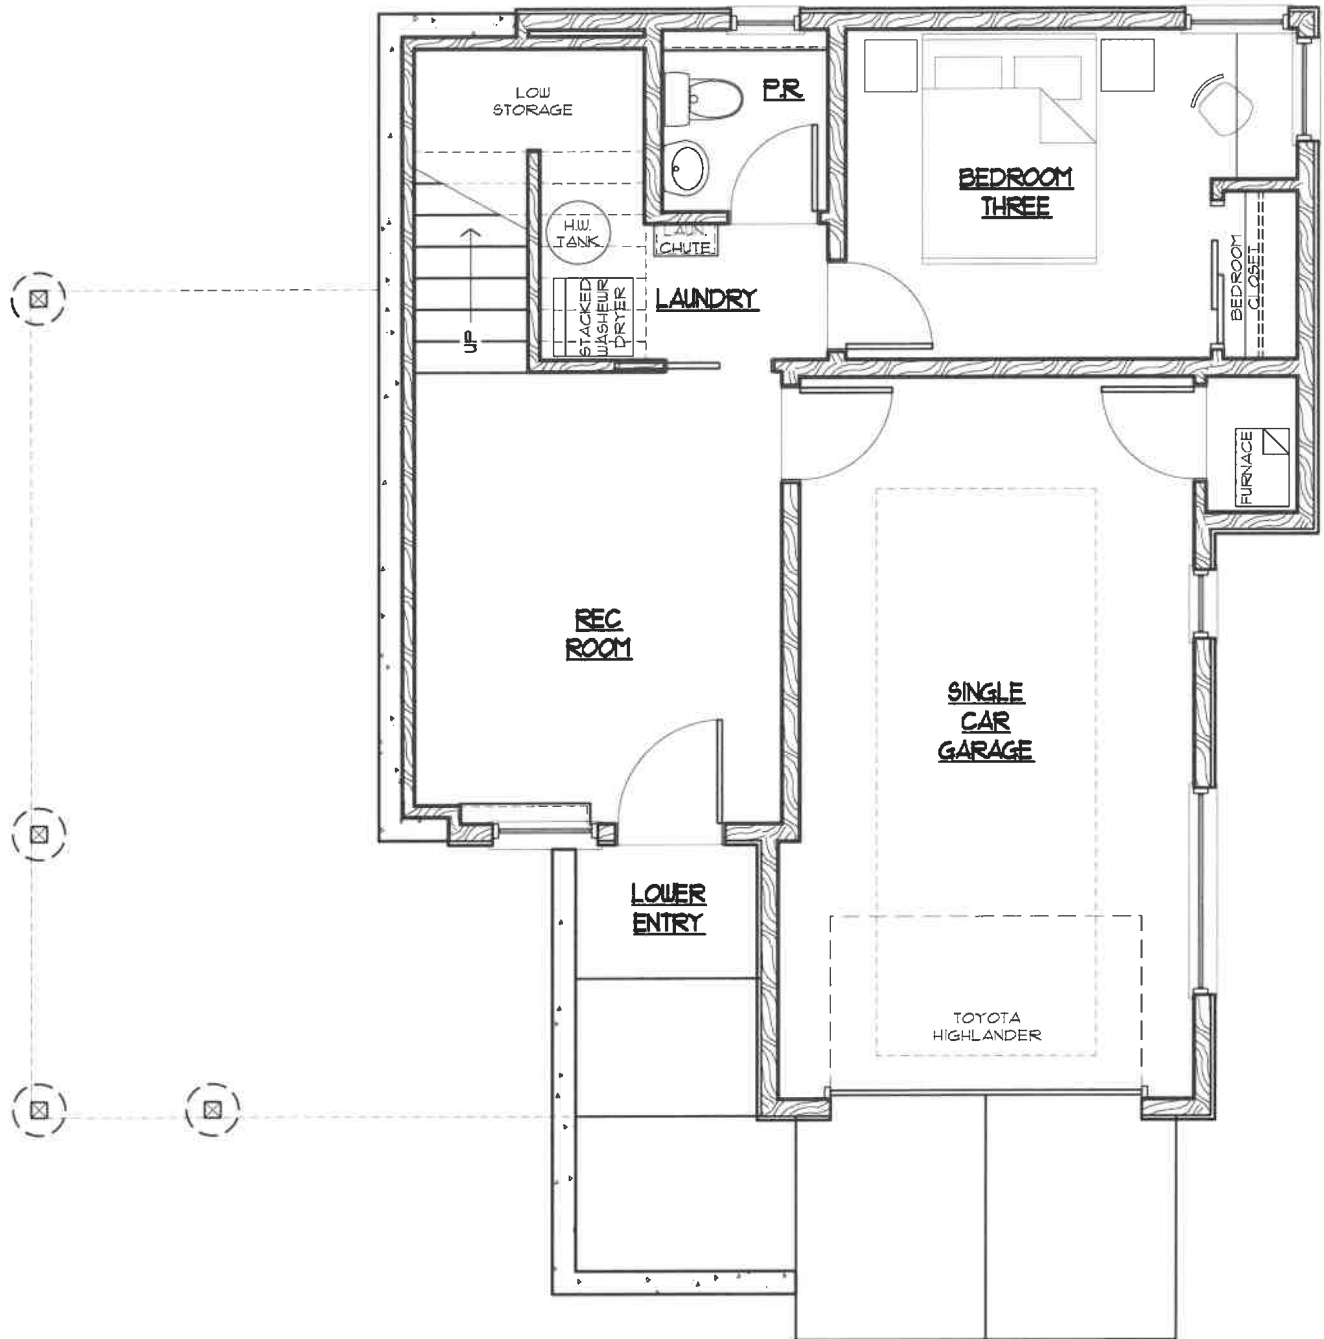


Wildrose Cottage

Lower Level - Option D

SCALE: 3/16" = 1'-0"

THESE DRAWINGS ARE
COPYRIGHTED BY THE DESIGN
PROFESSIONAL JOHN M. PAUL
AND ARE NOT SUITABLE FOR
USE WITHOUT THE APPROVAL
AND PARTICIPATION OF THE
DESIGN PROFESSIONAL

Gross Area - 392 SF

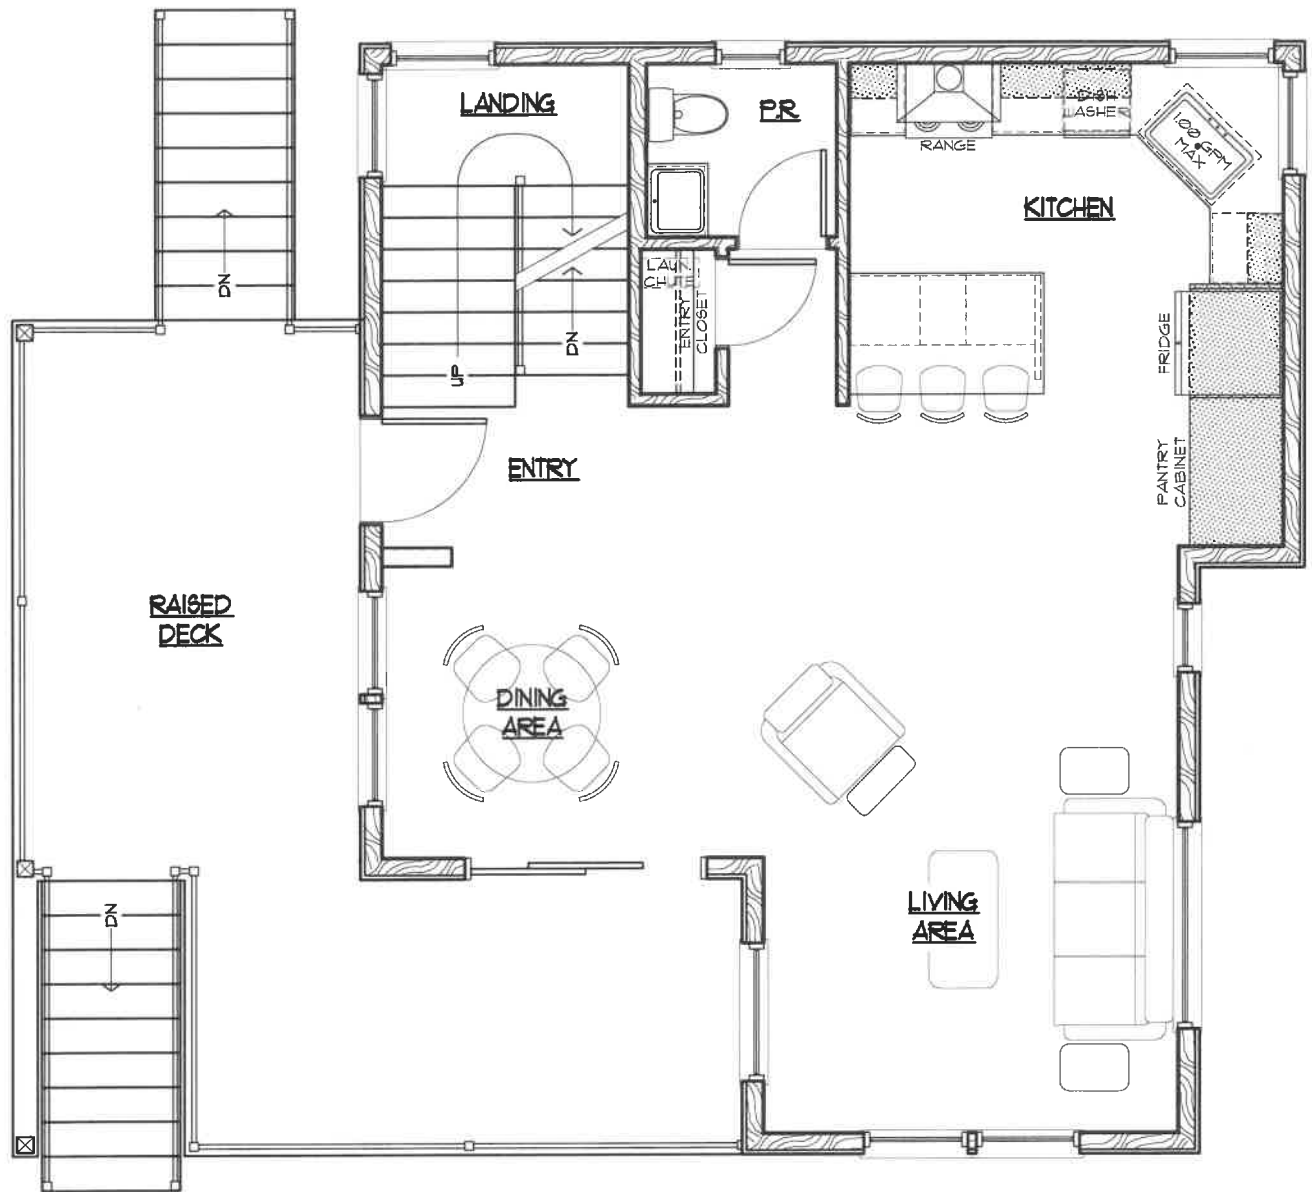


Wildrose Cottage

Main Level - Option A

SCALE: 3/16" = 1'-0"

THESE DRAWINGS ARE
COPYRIGHTED BY THE DESIGN
PROFESSIONAL JOHN M PAUL
AND ARE NOT SUITABLE FOR
USE WITHOUT THE APPROVAL
AND PARTICIPATION OF THE
DESIGN PROFESSIONAL

Gross Area - 725 SF

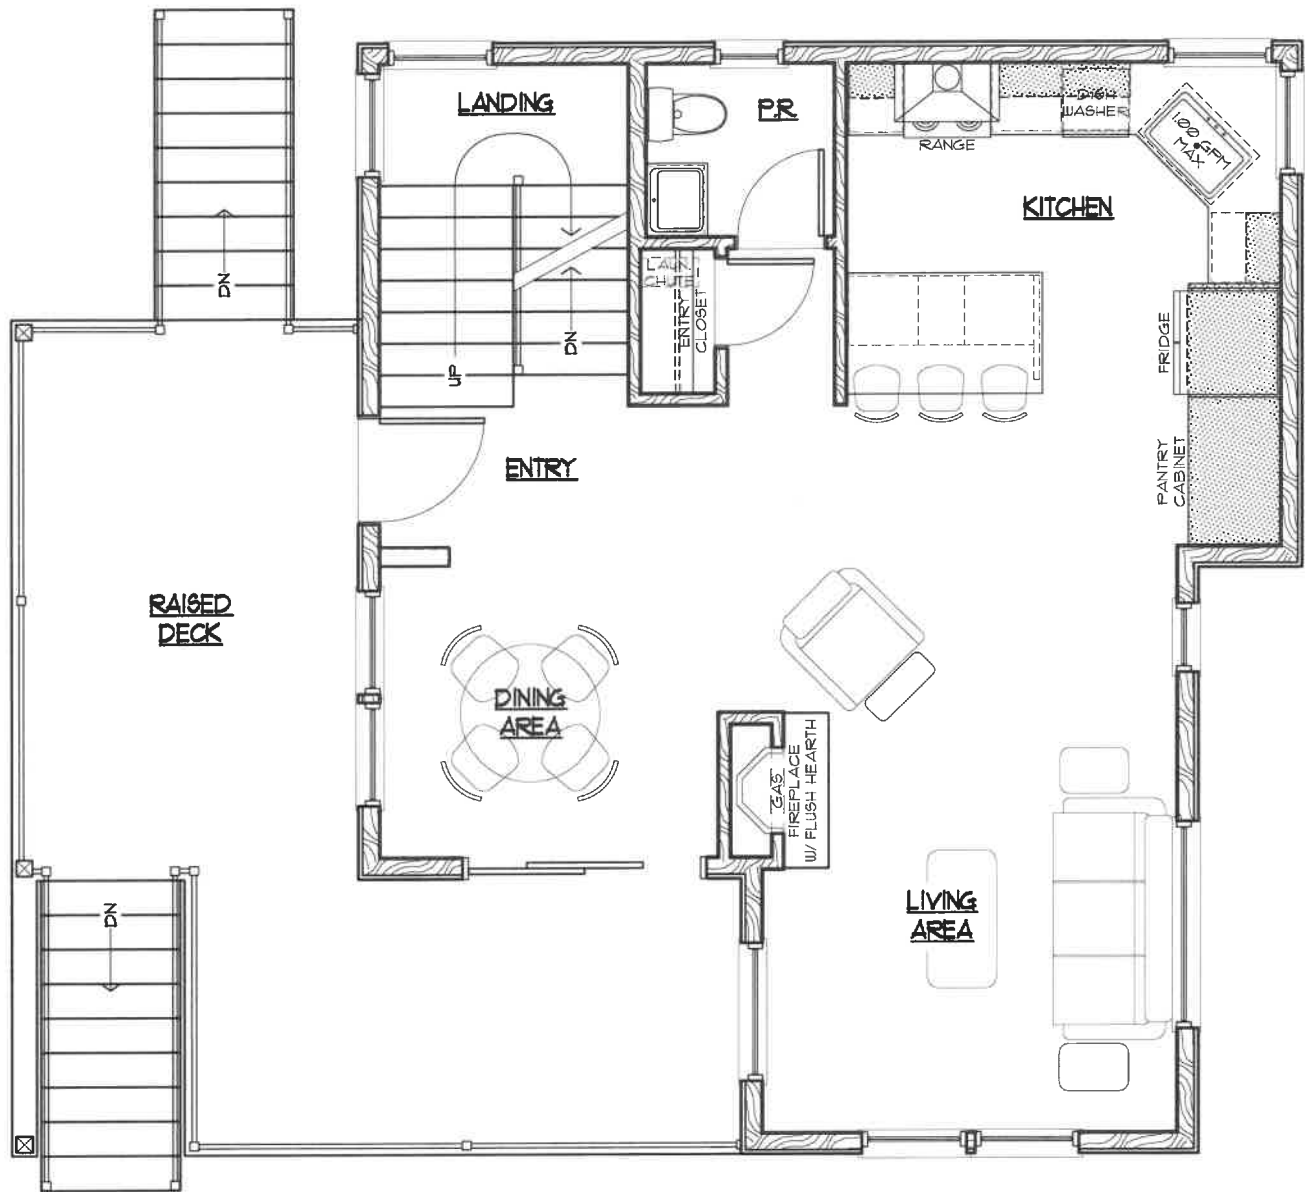


Wildrose Cottage

Main Level - Option B

SCALE: 3/16" = 1'-0"

THESE DRAWINGS ARE
COPYRIGHTED BY THE DESIGN
PROFESSIONAL JOHN M. PAUL
AND ARE NOT SUITABLE FOR
USE WITHOUT THE APPROVAL
AND PARTICIPATION OF THE
DESIGN PROFESSIONAL

Gross Area ~ 725 SF

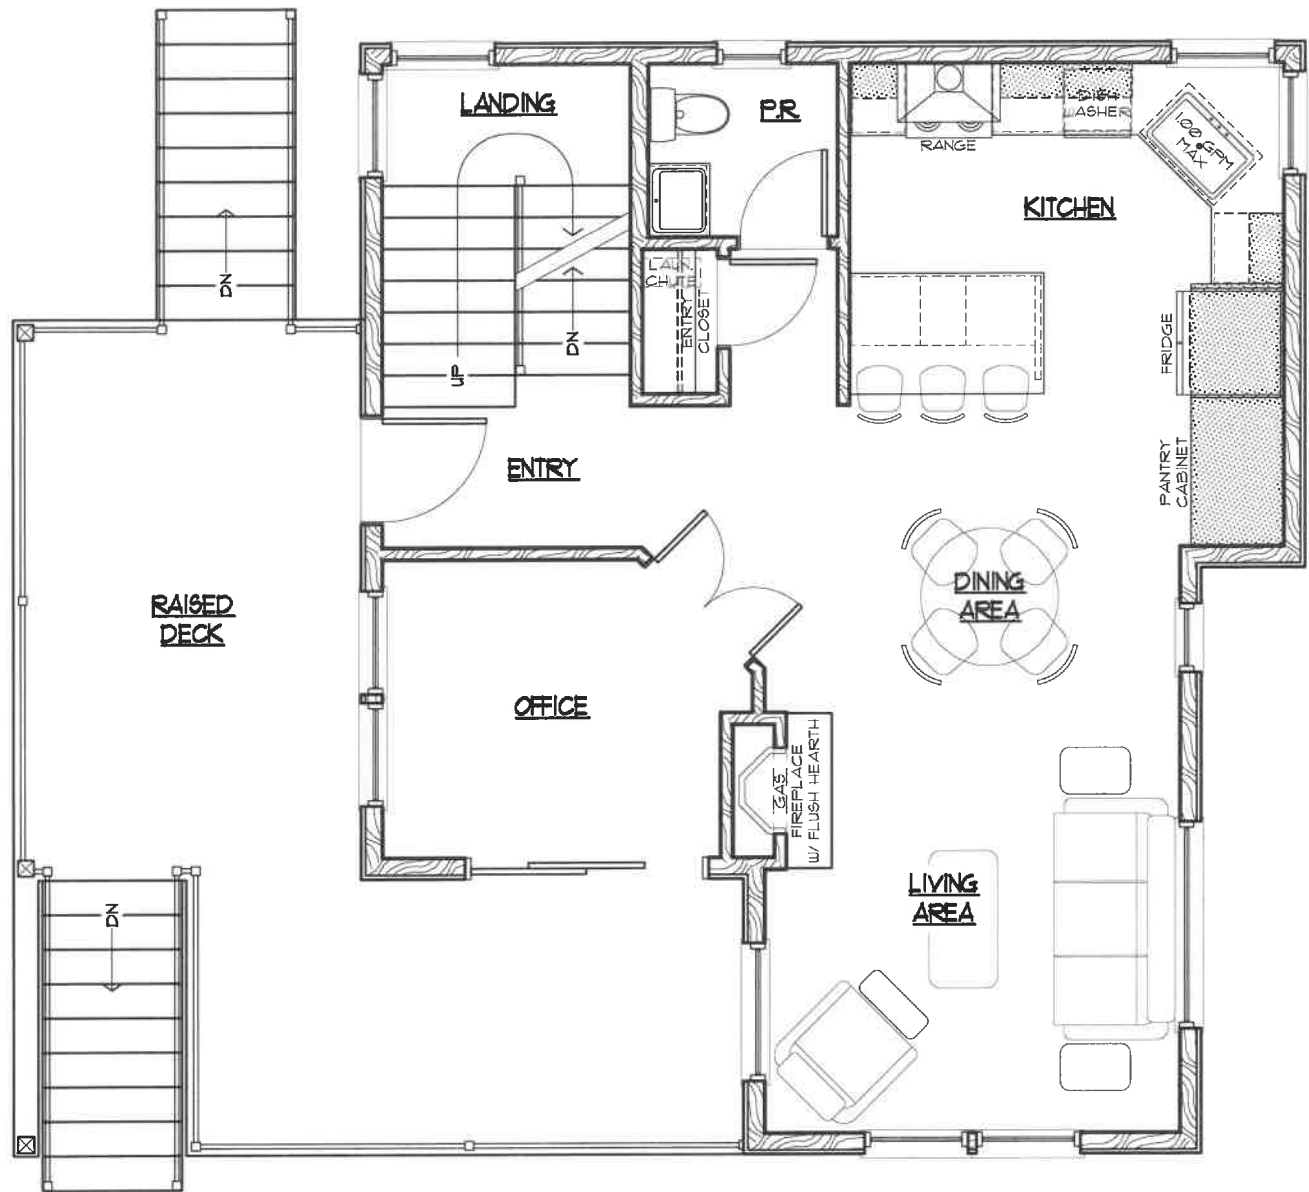

Wildrose Cottage

Main Level ~ Option C

SCALE: 3/16" = 1'-0"

THESE DRAWINGS ARE
COPYRIGHTED BY THE DESIGN
PROFESSIONAL JOHN M PAUL
AND ARE NOT SUITABLE FOR
USE WITHOUT THE APPROVAL
AND PARTICIPATION OF THE
DESIGN PROFESSIONAL

Gross Area ~ 725 SF




Wildrose Cottage

Upper Level - Option A

SCALE: 3/16" = 1'-0"

THESE DRAWINGS ARE
COPYRIGHTED BY THE DESIGN
PROFESSIONAL JOHN M PAUL
AND ARE NOT SUITABLE FOR
USE WITHOUT THE APPROVAL
AND PARTICIPATION OF THE
DESIGN PROFESSIONAL

Gross Area ~ 550 SF

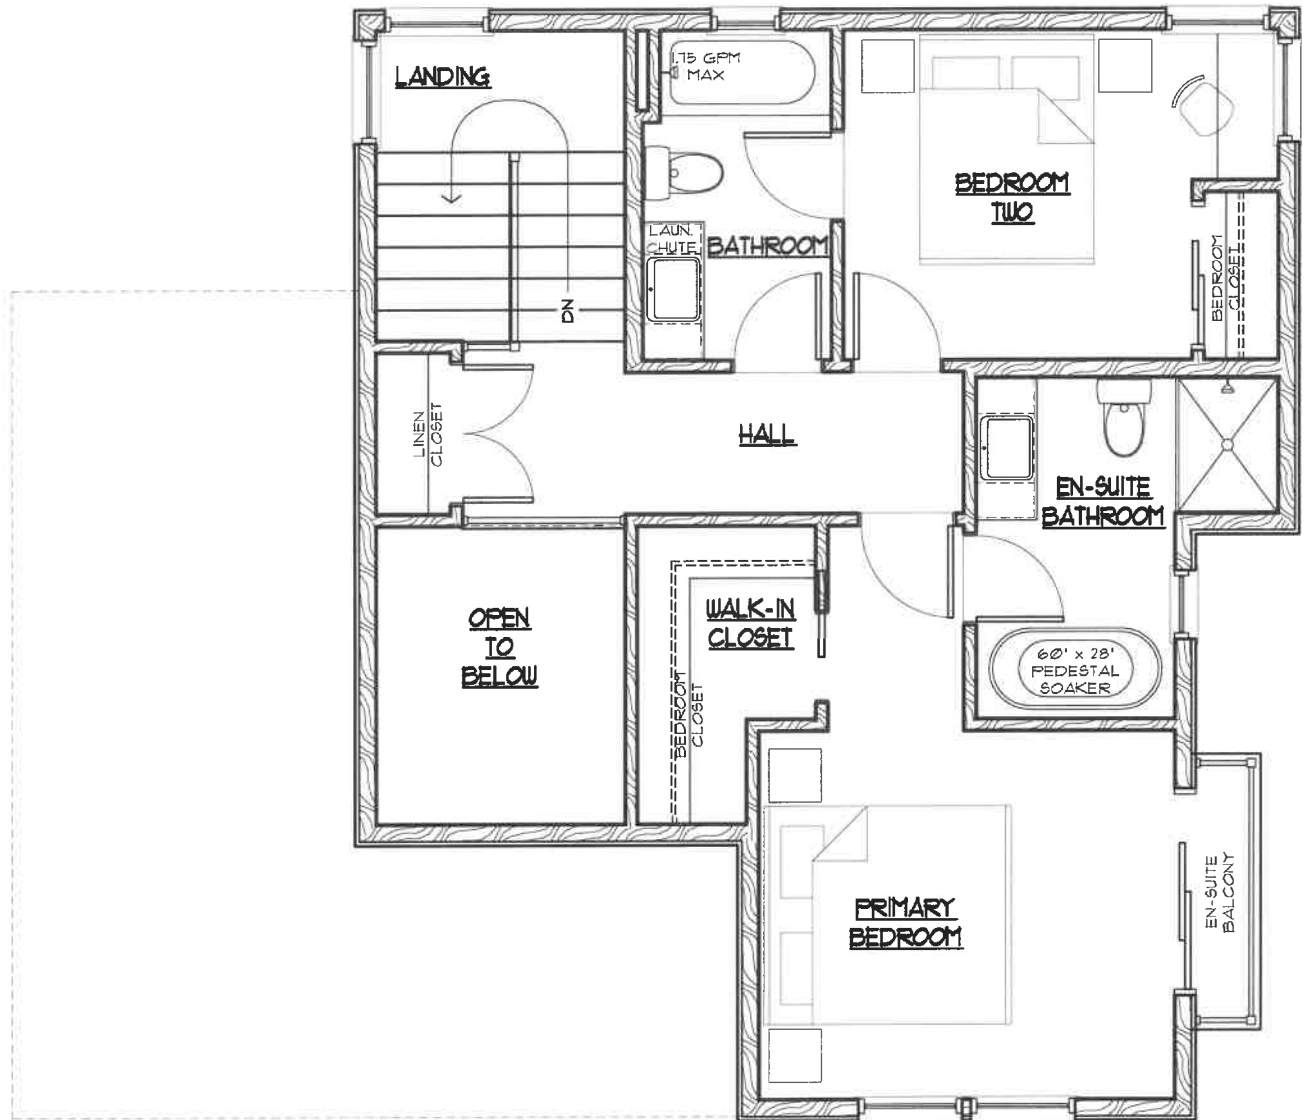


Wildrose Cottage

Upper Level - Option B

SCALE: 3/16" = 1'-0"

THESE DRAWINGS ARE
COPYRIGHTED BY THE DESIGN
PROFESSIONAL JOHN M PAUL
AND ARE NOT SUITABLE FOR
USE WITHOUT THE APPROVAL
AND PARTICIPATION OF THE
DESIGN PROFESSIONAL

Gross Area ~ 582 SF

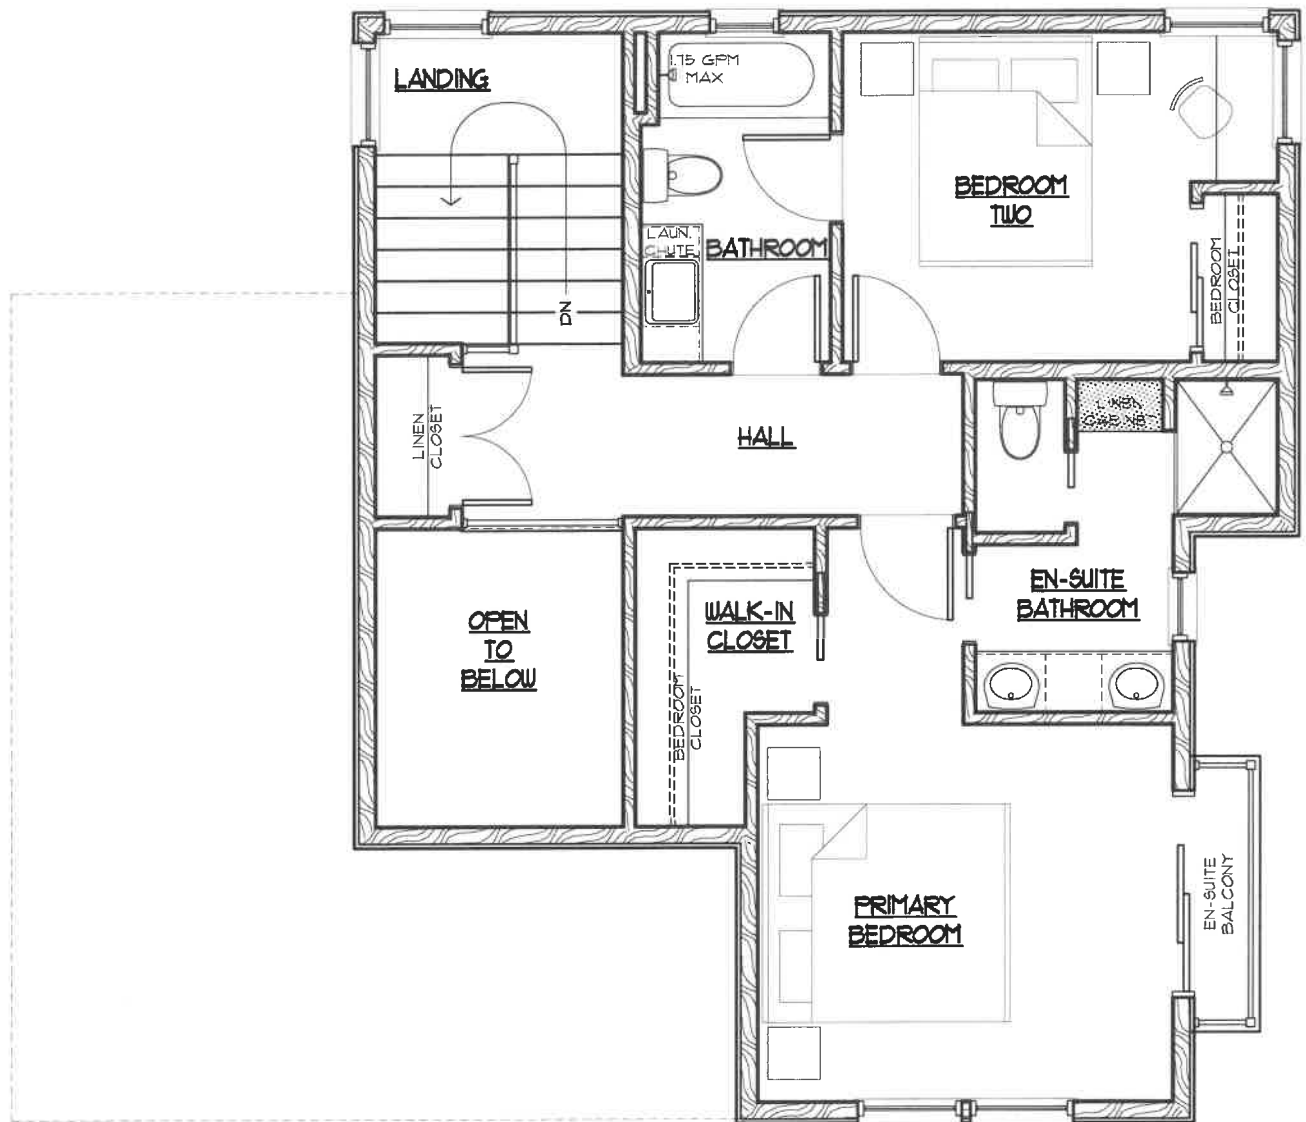


Wildrose Cottage

Upper Level - Option C

SCALE: 3/16" = 1'-0"


THESE DRAWINGS ARE
COPYRIGHTED BY THE DESIGN
PROFESSIONAL JOHN M. PAUL
AND ARE NOT SUITABLE FOR
USE WITHOUT THE APPROVAL
AND PARTICIPATION OF THE
DESIGN PROFESSIONAL

Gross Area ~ 582 SF

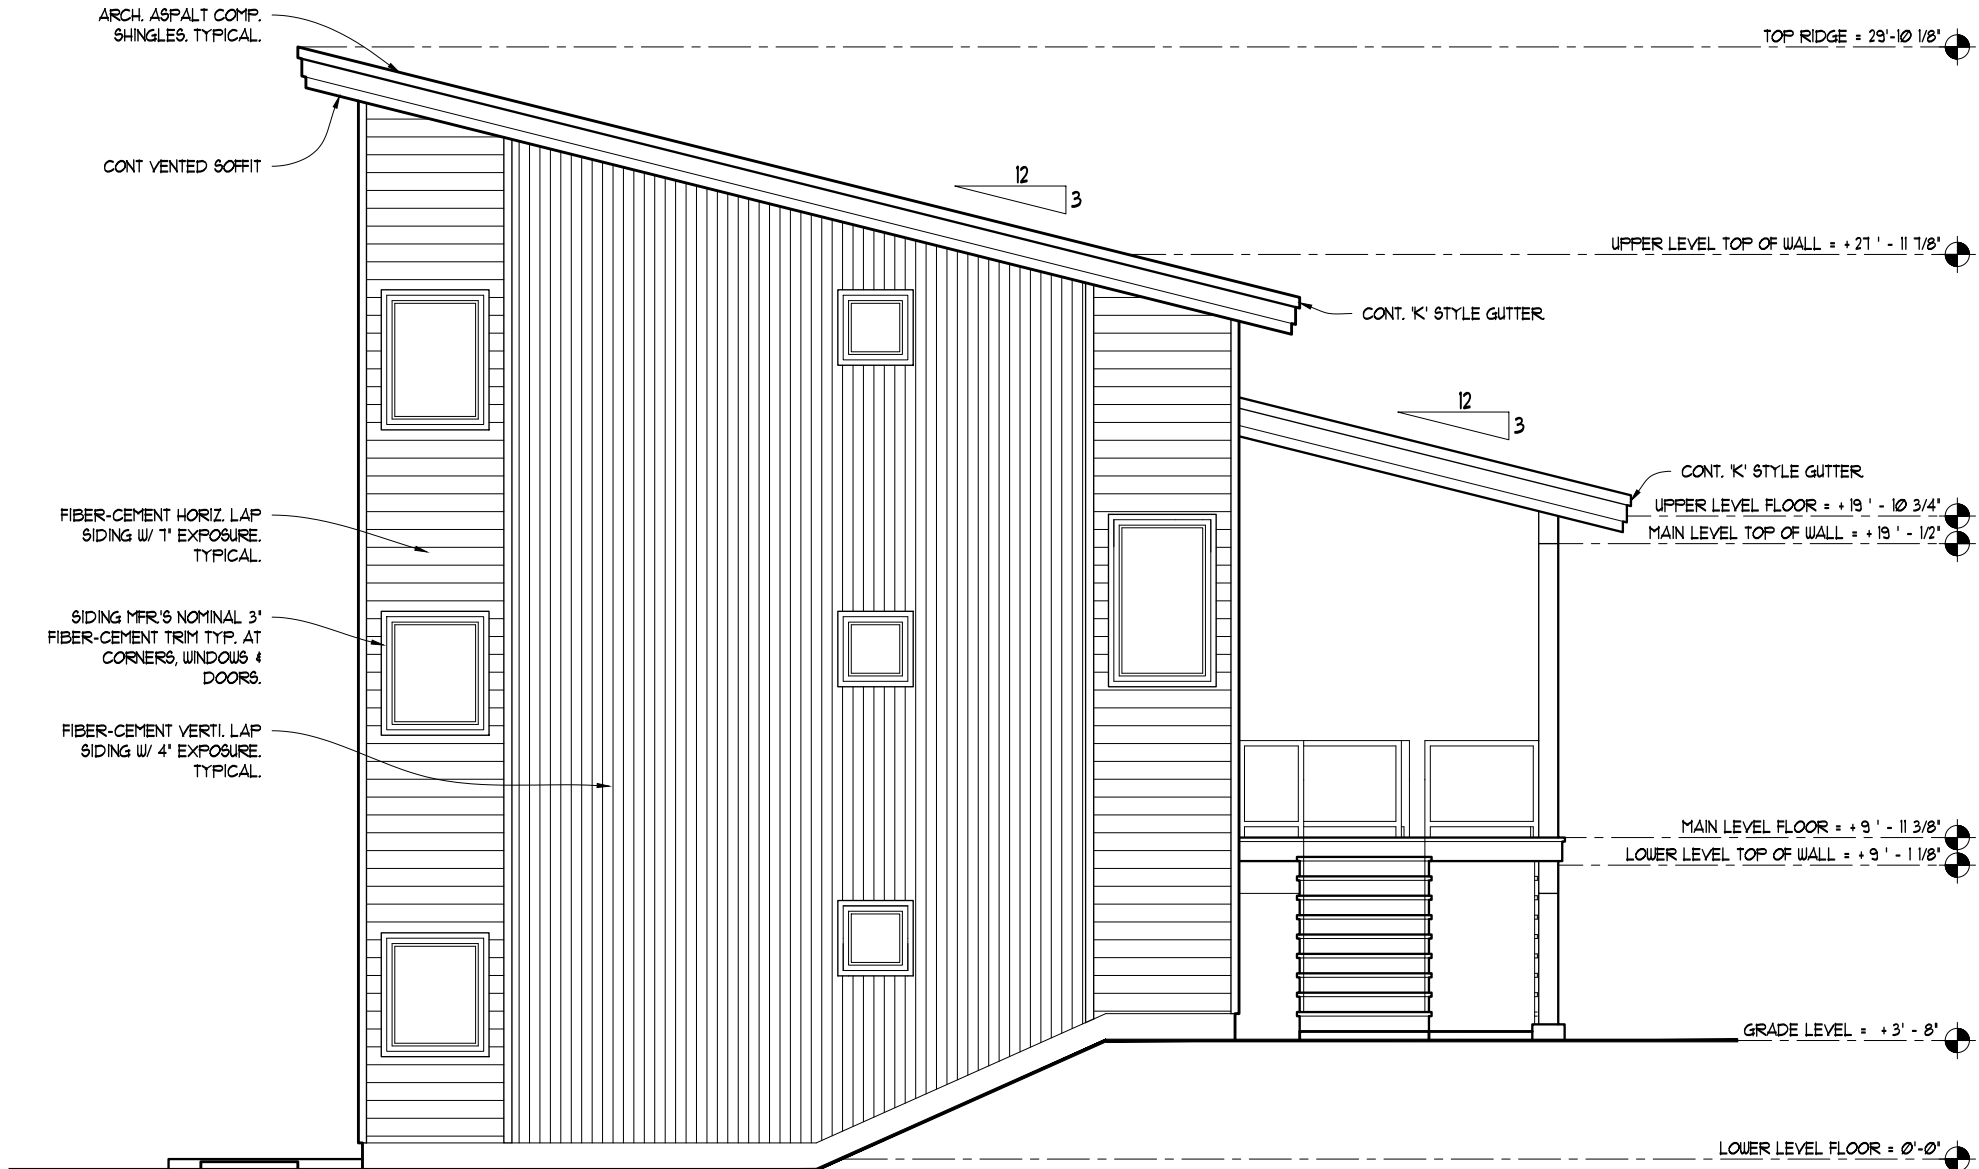



Wildrose Cottage East Elevation

SCALE: 1/4" = 1'-0"

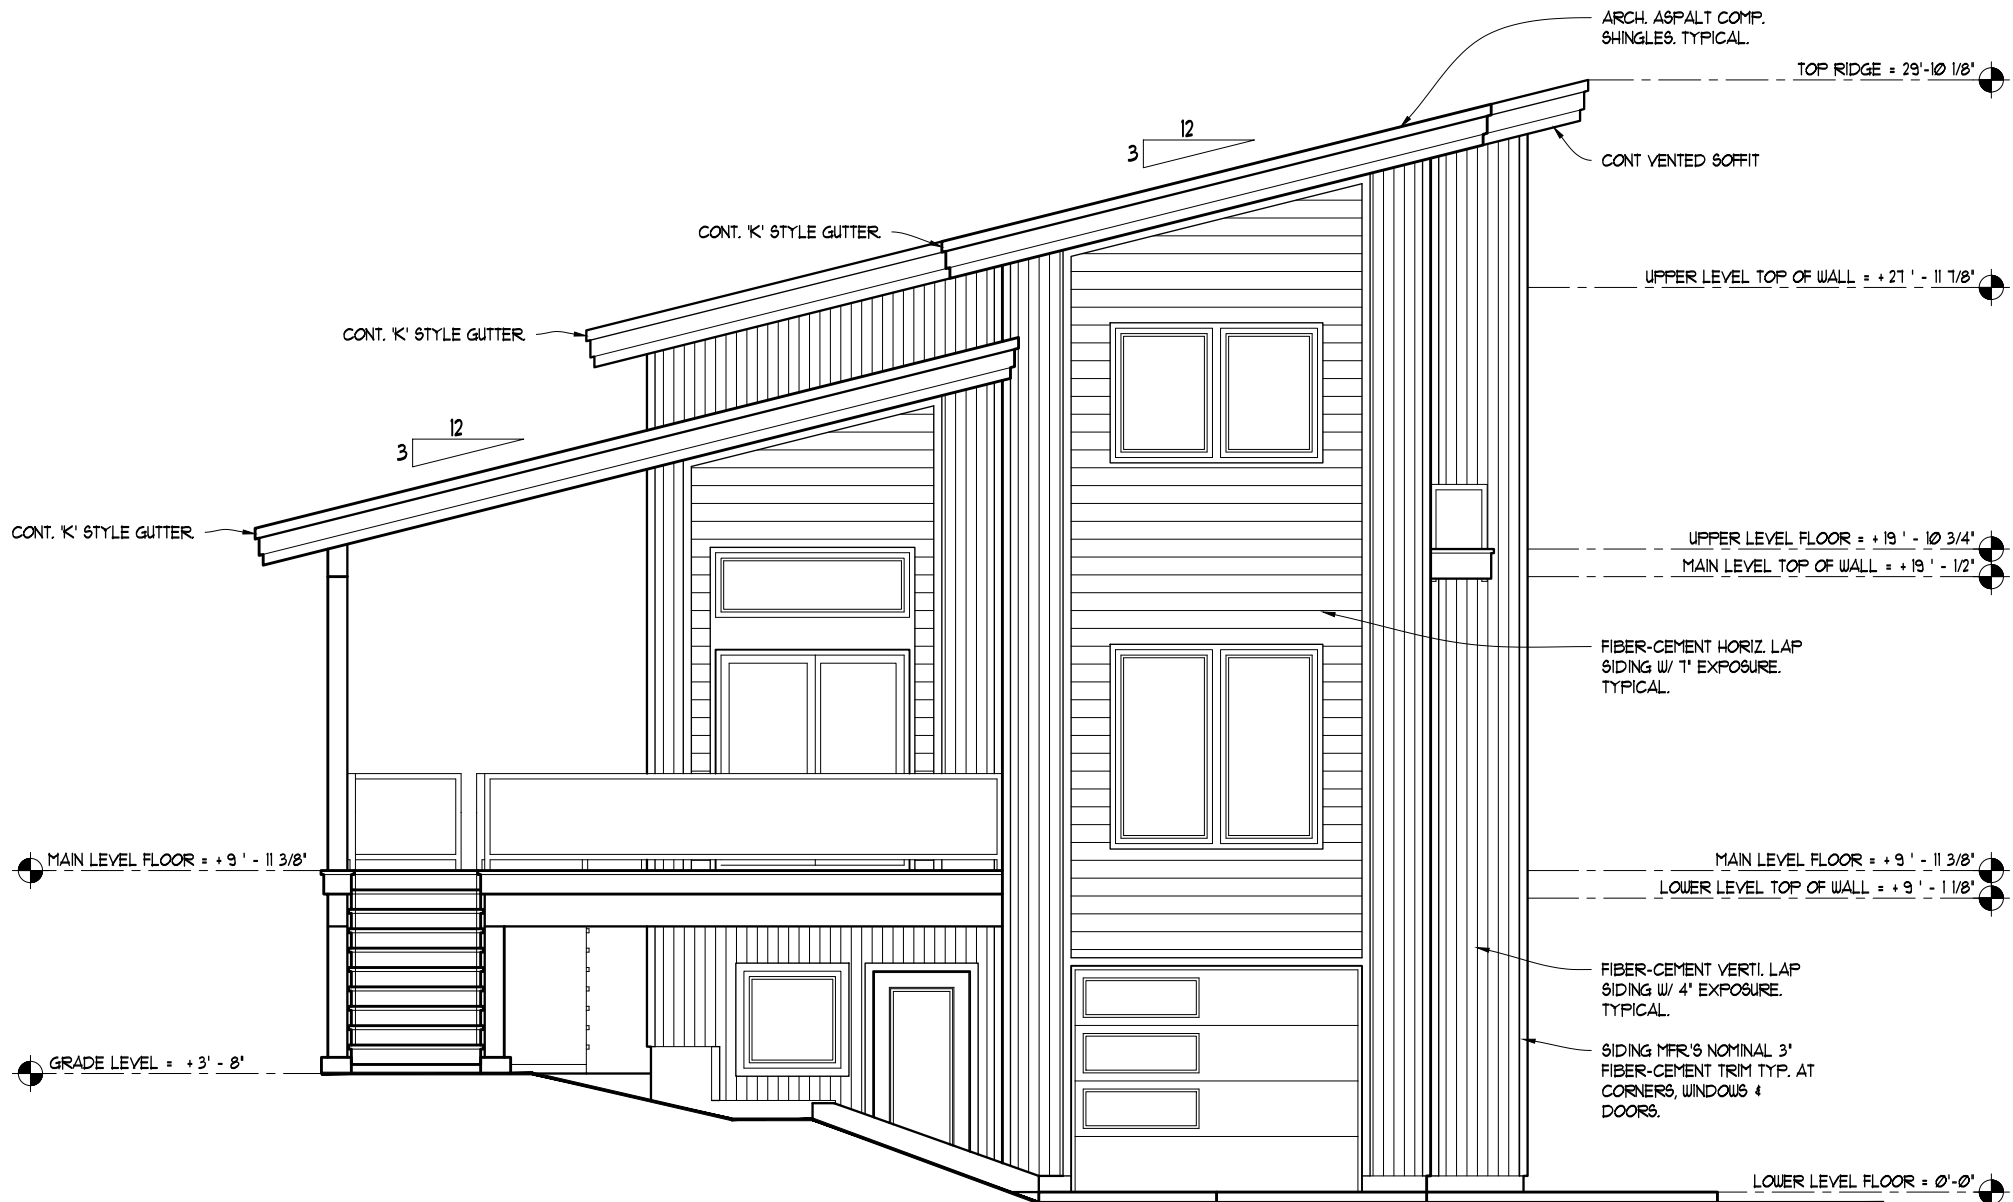

Wildrose Cottage West Elevation

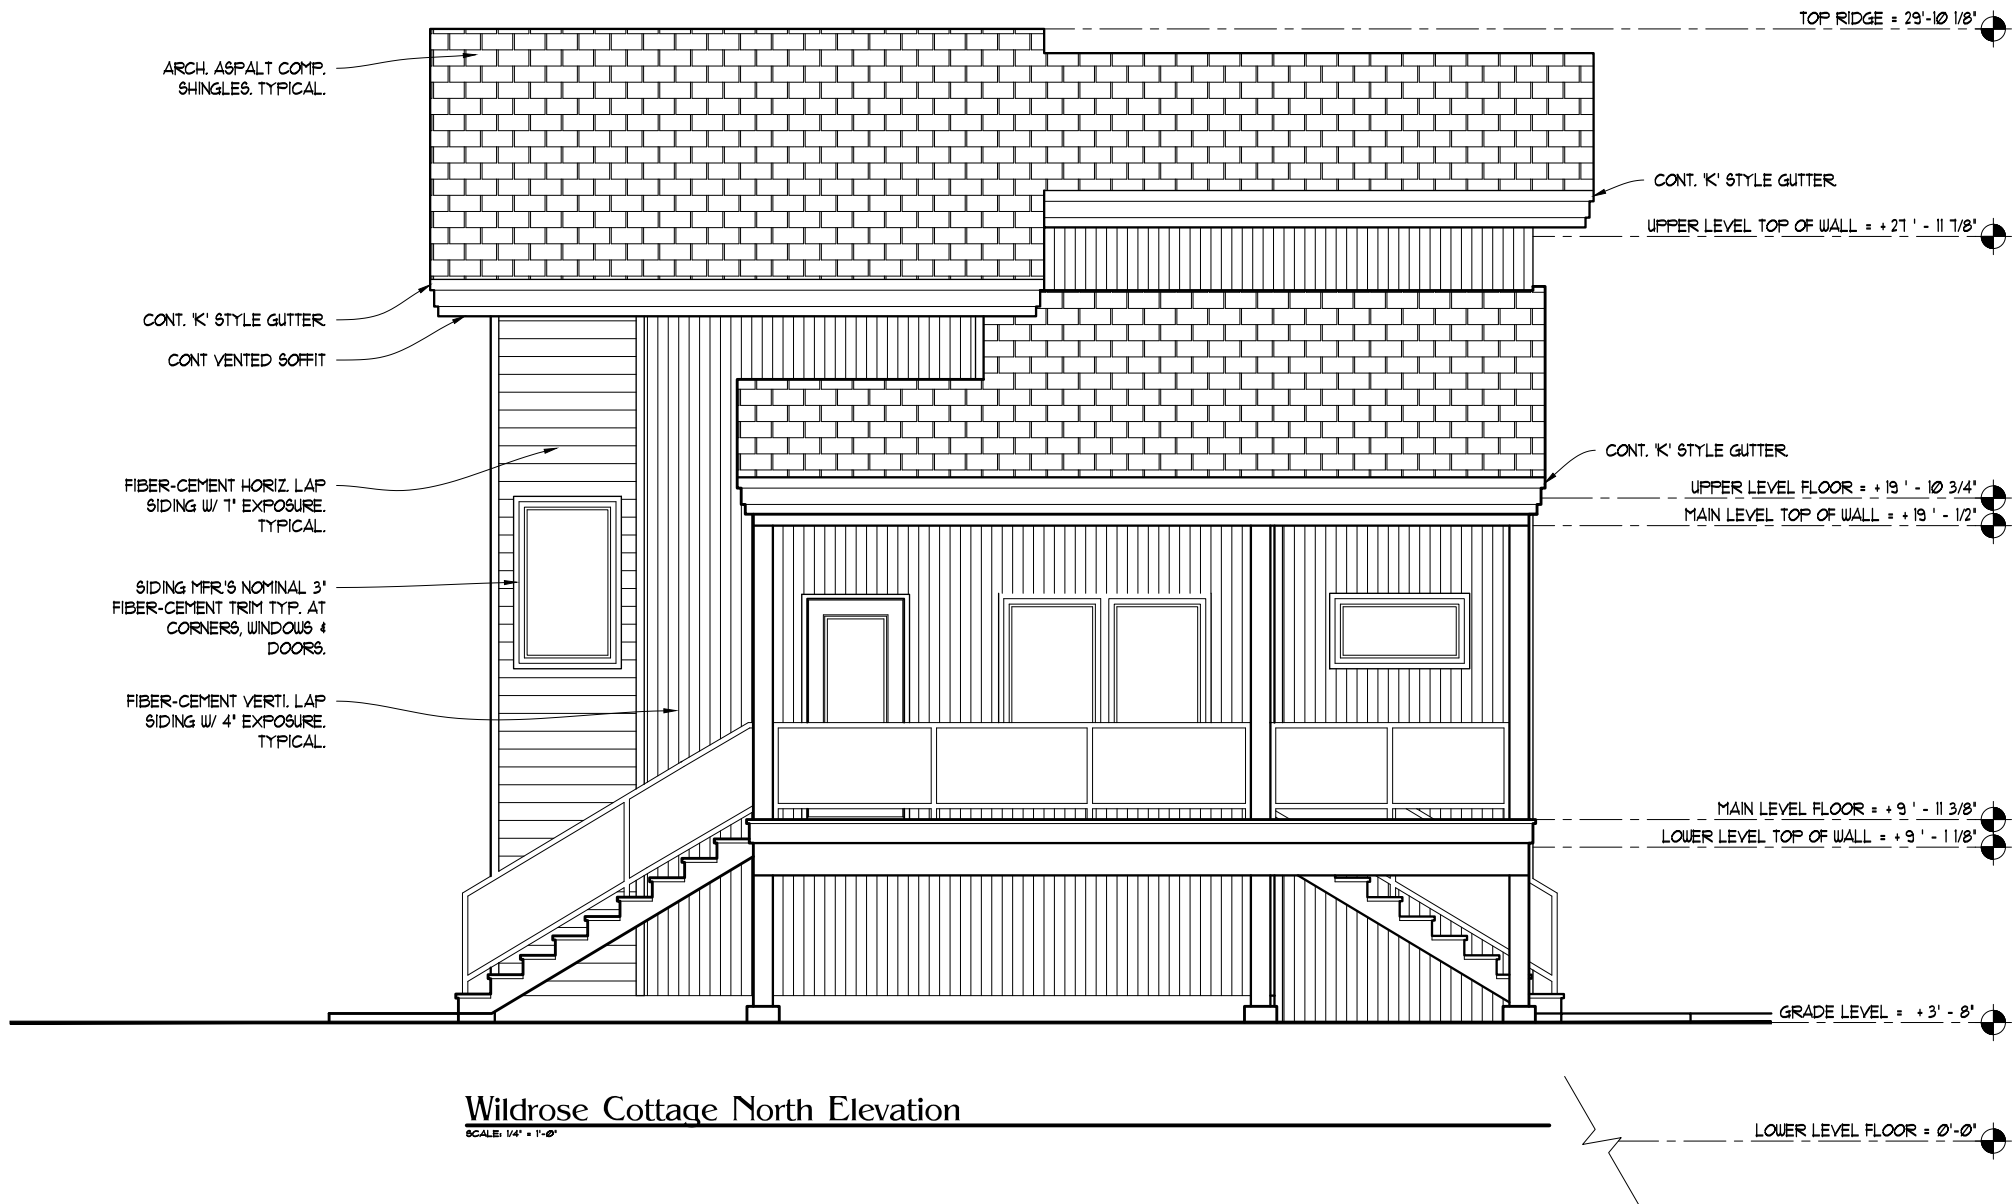

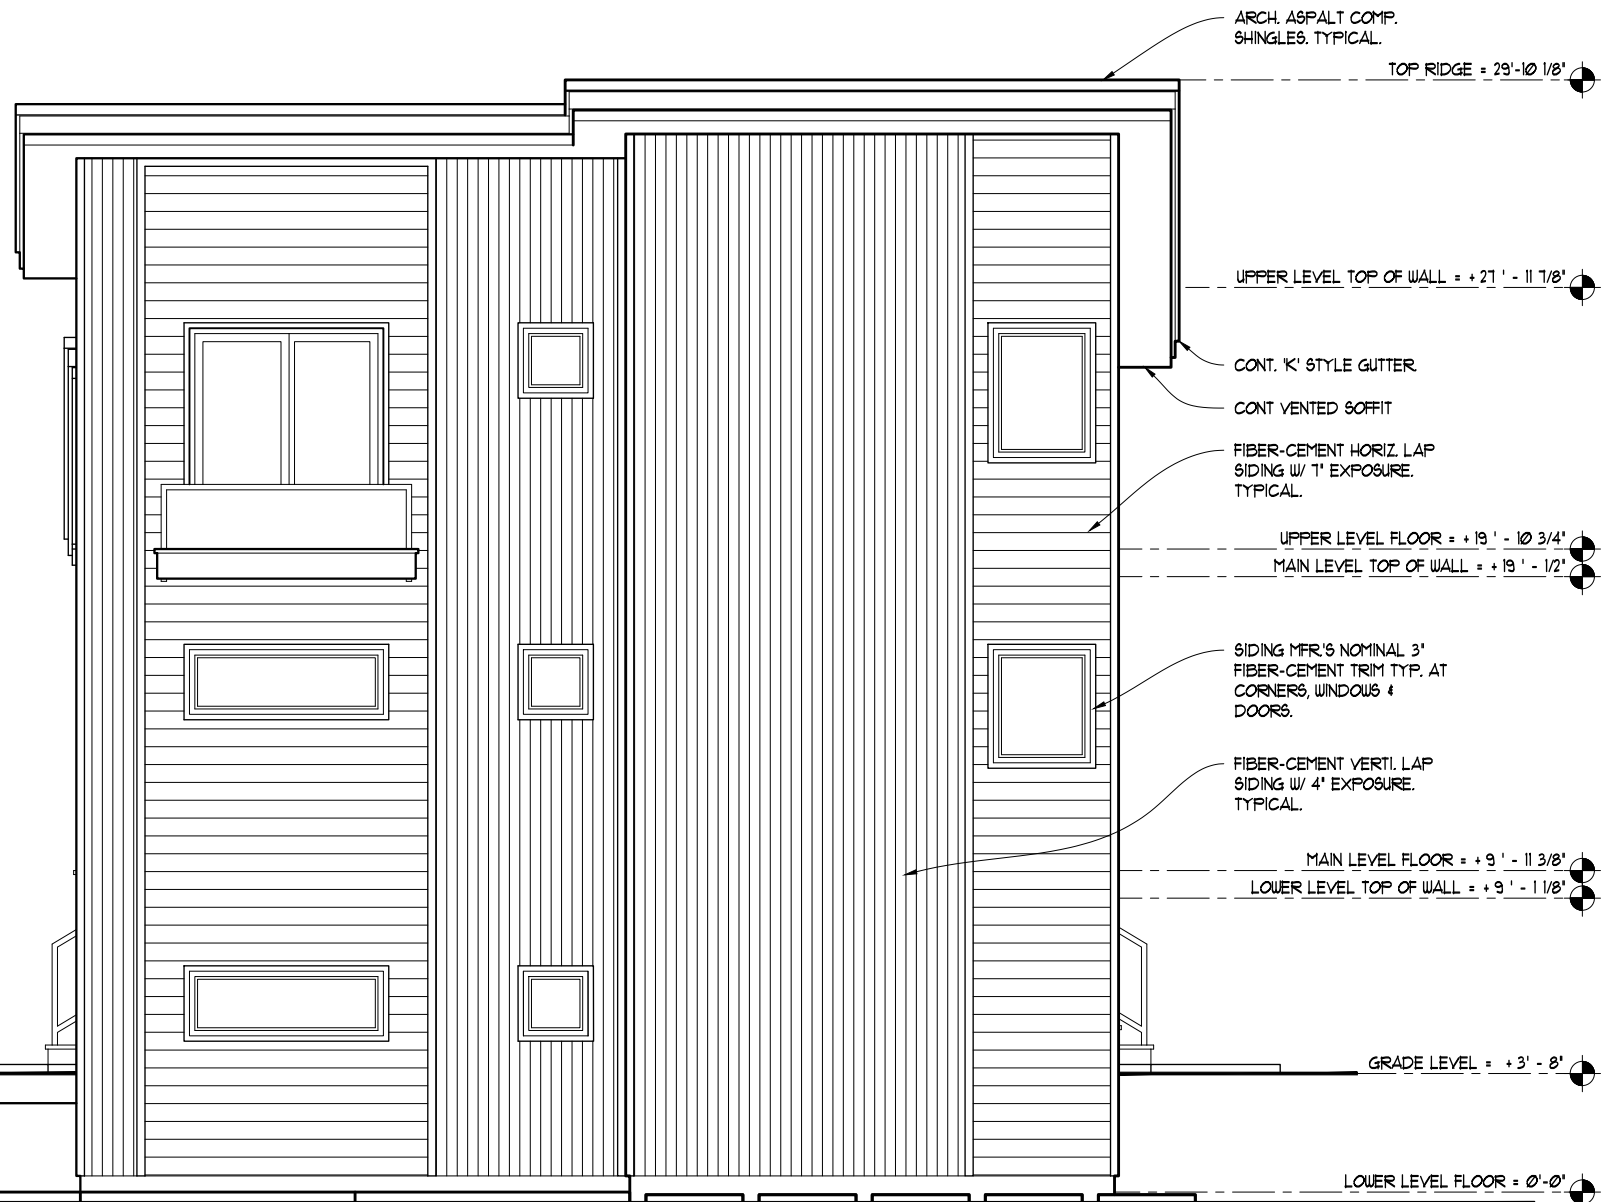

Wildrose Cottage South Elevation

SCALE: 1/4" = 1'-0"

















AGREEMENT FOR SEWAGE COLLECTION, CONVEYANCE, AND DISPOSAL
SERVICES BETWEEN CITY OF MOSCOW, IDAHO AND
SOUTHEAST MOSCOW WATER AND SEWER DISTRICT

THIS AGREEMENT FOR SEWAGE COLLECTION, CONVEYANCE AND DISPOSAL SERVICES is made and entered into this 28 day of September, 2016, by and between the City of Moscow, Idaho, a municipal corporation of the State of Idaho (hereinafter "CITY"), and Southeast Moscow Water and Sewer District (hereinafter "DISTRICT").

WITNESSETH:

WHEREAS, DISTRICT owns a domestic wastewater sewage collection and conveyance system that serves the area within DISTRICT's service area; and

WHEREAS, DISTRICT has contracted with CITY since October 15, 1980 for sewage conveyance and disposal services with connections to CITY facilities to provide adequate conveyance and proper treatment of DISTRICT sewage; and

WHEREAS, DISTRICT desires to contract with CITY for sewerage conveyance and disposal services with connections to CITY facilities to provide adequate conveyance and proper treatment of DISTRICT sewage; and

WHEREAS, CITY desires to contract with DISTRICT for conveyance of sewage collected within City limits and outside DISTRICT service area through DISTRICT facilities;

NOW THEREFORE, in consideration of the covenants and agreements hereinafter set forth to be kept and performed by the parties hereto, it is mutually agreed as follows:

I. CITY AGREES:

1. To permit DISTRICT to continue connection to CITY sewer facilities, providing adequate and proper sewage conveyance and treatment service to DISTRICT. All connections shall be made in accordance with sound engineering practices and in a manner designated by CITY.
2. To maintain, operate and keep in good repair DISTRICT's sewer collection and conveyance mains, laterals, force mains and pumping stations as necessary to service DISTRICT. Property owners within DISTRICT shall remain responsible for maintenance and repair of service lines from the lateral or main to the individual property owner's premises.
3. The cost of said service shall be provided through the sewer service charge. Maintenance, operation, and repair, as the terms are used in this section in respect to DISTRICT, shall not include cases of major breaks in DISTRICT's sewer pipelines or damage to DISTRICT's pumping facilities occasioned by unusual conditions, major failures, or natural disasters, including earthquakes or floods, resulting in a loss costing more than fifty percent (50%) of

CITY's annual revenue collected from within DISTRICT's service area. In such cases, the cost of repairing such major breaks or damage beyond the fifty percent (50%) of CITY's annual revenue, shall be the full responsibility of DISTRICT.

4. To collect from each DISTRICT sewer user within DISTRICT's service area, the sewer service charges as more specifically provided for hereinbelow. CITY further agrees to collect any additional connection fees or sewer service fees charged by DISTRICT for DISTRICT's purposes and shall turn over such funds monthly to DISTRICT. CITY shall have first priority on any funds collected to meet the sewer service charges of CITY. CITY shall make all reasonable efforts to bill delinquent accounts. On January 1 and July 1 of each year, CITY shall certify to DISTRICT all delinquent accounts older than three (3) months. DISTRICT to use all statutory power granted to DISTRICT to collect said delinquent accounts for payment owed to CITY, which amount collected shall be paid by DISTRICT to CITY.
5. To process applications and to issue permits for all connections to DISTRICT's sewer system. CITY shall provide DISTRICT with copies of said applications within fifteen (15) days of receipt of same, and CITY shall provide DISTRICT with copies of said permits within fifteen (15) days of issuance of same. CITY shall provide inspection for all such connections and, for this service, each individual applicant shall pay CITY the same inspection fee as is charged customers within CITY limits, plus five dollars (\$5). All service 'taps' shall be made by CITY and each individual applicant shall pay CITY the same 'tap' fee as is charged customers within CITY limits, plus five dollars (\$5). These added fees shall not be charged to DISTRICT's patrons who are within CITY limits.
6. To manage through its Administrative Authority, the rules and regulations adopted by DISTRICT. The Administrative Authority of CITY shall enforce compliance with said rules and regulations to the extent allowed by law. CITY shall notify DISTRICT of all violations for which compliance cannot be legally obtained and DISTRICT shall take all necessary steps provided for by State law to diligently enforce any adopted rules and regulations.
7. CITY will hold DISTRICT and its officers harmless from any and all claims that may arise as a result of CITY's sole negligence in operation of the system.

II. DISTRICT AGREES:

1. To comply with all Federal and State regulations, relating to sewer systems, applicable to CITY and DISTRICT.
2. To take all necessary steps to adopt, keep current and enforce a resolution and standards concerning the collection and disposal of sewage within DISTRICT's service area. Such resolution and standards shall be in substantially the same form as the applicable ordinance and standards of CITY as amended from time to time by the City Council, which said Resolution and standards are herewith attached, marked as Exhibits 1 and 2 respectively, and by this reference made a part of this Agreement. Such resolution and standards must receive City Council approval prior to implementation by DISTRICT.

3. To delegate by proper order, authority to CITY and its employees to perform the duties required by this Agreement.
4. To require all residents and property owners within DISTRICT's service area to connect their houses and other structures requiring sewage disposal to DISTRICT's adjacent sewers within ninety (90) days after the resident or property owner receives notice from DISTRICT to connect, as per Idaho Code.
5. To impose sewer service charges by resolution on property within DISTRICT's service area served by or available to be served by, sewer lines owned by DISTRICT in an amount sufficient to cover CITY's sewer service charges in accordance with the most current fee schedule as adopted by the City Council. CITY's fee structure applied to CITY residents shall apply to DISTRICT patrons, with the exception of additional monthly surcharge. DISTRICT shall take all available legal steps to collect and enforce the sewer service fees charged by DISTRICT which CITY has not been able to collect. Such delinquent sewer service charges shall be turned over by DISTRICT to CITY provided CITY has not already been paid by DISTRICT for said delinquent sewer service charges. The sewer service charges imposed by DISTRICT's resolution shall state that new sewer hookups shall be charged the current sewer service fees to property ninety (90) days after the owner thereof is given notice of an available sewer, or when actual connection occurs, whichever occurs first.
6. To maintain and, when requested by CITY, to provide copies of all easements rights-of-way and permits required for DISTRICT's sewer system, along with assurances that the system is located within the easement or right-of-way areas.
7. To construct all new DISTRICT lines and facilities at gradients, in such sizes and locations, and of such capacity as to substantially meet standards set by CITY. Individual service connections along existing public rights-of-way shall be served by extensions of public sewer lines constructed in compliance with CITY standards, where required by CITY. In such instances, the public sewer will be required to be extended at the expense of the individual requesting connection to public sewer. Public sewer lines provided by a developer shall become property of DISTRICT. DISTRICT will require dedication to DISTRICT of the new sewer lines constructed by the developer and shall require dedication of public easements to DISTRICT for sewer mains not located within public rights-of-way. CITY, within thirty (30) days of issuance, shall provide notice to DISTRICT of all hookup permits approved for construction of new public sewer lines within DISTRICT.
8. To provide to CITY certification by DISTRICT's engineer that additions or modifications to the system are tested to CITY's standards; laid to line and grade within prescribed tolerances; and bedded and backfilled in accordance with the adopted specifications. DISTRICT's standards shall be same as CITY's standards. It is understood that CITY reserves the right of final approval on any additions, connections, or modifications to the system prior to the connection of any new user to the system, which said approval will not be unreasonably withheld.
9. That for and in consideration of CITY supplying DISTRICT the above-referenced services, DISTRICT hereby expresses its intent, through its Board of Directors, not to oppose

annexation of any portion of DISTRICT by CITY when CITY desires annexation. The DISTRICT's Board does not purport to bind individual property owners within the DISTRICT to agree to annexation or to oppose annexation because the Board lacks statutory power to do so.

10. To maintain and, when requested by CITY, provide certification from the North Latah County Highway District that the Highway District approves the installation, operation and maintenance of existing and new public sewer lines in the public rights-of-way. Restrictions to the use of the rights-of-way are given in a 'Cooperative Agreement' between the North Latah County Highway District and DISTRICT, attached hereto as Exhibit 3.
11. To turn over to CITY, upon annexation of DISTRICT, the entire sewer system, together with any improvements, operating property, rights-of-way and easements, located within the annexed area. CITY will not owe any compensation to DISTRICT for said transfer.
12. To transfer its right and interest in any guarantees, warranties, real or implied, associated with the contracts, subcontracts, material, equipment and other related items associated with DISTRICT's system, to CITY at the point in time that CITY accepts the system after annexation or upon dissolution of DISTRICT.
13. That CITY reserves the right to modify any and all of DISTRICT's equipment and/or system where CITY finds said modification is necessary, without cost to DISTRICT and without approval of DISTRICT.

III. THE PARTIES AGREE:

1. That the basic monthly sewer service charge by CITY to DISTRICT's customers shall be uniform within each classification of users (residential, commercial, or industrial) for all users located within DISTRICT's service area. This rate shall be the same as the monthly charges for residential, commercial, or industrial users inside the City limits of CITY and said monthly sewer service charges shall be retained by CITY for provision of sewage conveyance and disposal services. In addition to the monthly sewer service charges, all users located within DISTRICT's service area shall be charged a surcharge of three dollars (\$3) per month. Two dollars (\$2) per month of the surcharge shall be retained by CITY for administrative services to DISTRICT consisting of account billing and collection, and accounting. The remaining one dollar (\$1) of the surcharge shall be conveyed to DISTRICT for the cost of administrative services not provided by CITY. For those properties that are located both within DISTRICT's service area and City limits, said surcharge of three dollars (\$3) shall be reduced to one dollar (\$1) with said surcharge conveyed to DISTRICT.
2. DISTRICT's connection fee shall be the same as CITY's General Facilities Charge (GFC) with seventy percent (70%) allocated to DISTRICT's reserve fund and thirty percent (30%) to CITY's sewer capital fund.
3. For any connection in an area beyond DISTRICT's service area, which results in flow through DISTRICT's boundaries that will receive service from DISTRICT's facilities, both CITY's GFC and seventy percent (70%) of DISTRICT's connection fee shall apply. In such

cases, CITY shall retain the entire CITY GFC and the DISTRICT shall receive the seventy percent (70%) of DISTRICT's connection fee for the respective capital and reserve funds.

4. That CITY has the authority to review and approve the construction plans and specifications for any alterations or expansion of the system. All sewers constructed within DISTRICT's boundaries shall conform to CITY standards for sewer line construction. Any additional cost for alterations or expansion required by CITY that increases system capacities in order to provide service to areas that are outside DISTRICT's boundaries and within CITY limits, shall be borne by CITY as provided in Section IV. of this Agreement.
5. Applications for expansion of DISTRICT's system within DISTRICT's boundaries and for changes in DISTRICT's boundaries must receive approval by the City Council and DISTRICT Board. To initiate an expansion of DISTRICT's system or boundaries, DISTRICT's Board of Directors shall submit such request in writing to the City of Moscow Mayor and City Council defining the system additions or modifications, revised boundaries, information on potential added sewer loads, and the reasons for the expansion. All such boundary modifications shall be in accordance with applicable Idaho Code, including any future amendments or changes to Idaho Code.
6. That the design, construction and inspection of all facilities and improvements within DISTRICT shall be in accordance with plans approved by the Idaho State Department of Environmental Quality and the parties hereto.
7. That upon the request of either party hereto, to negotiate with each other relative to amendments to this Agreement, provided that any such amendments shall be in writing and approved by both the City Council and DISTRICT, except as otherwise provided herein.
8. That the terms of this Agreement shall be reviewed at least every ten (10) years by CITY and DISTRICT. Any proposed changes must be approved by the City Council and DISTRICT's Board of Directors. This Agreement shall be in effect from the date of approval of DISTRICT and City Council to March 1, 2026. This Agreement may be renewed for one (1) additional ten (10) year term if approved by both City Council and DISTRICT's Board.

IV. NON-DISTRICT FLOW CONVEYANCE:

1. In recognition of the likelihood of annexation by CITY of lands outside DISTRICT's boundaries and the anticipated need to convey sewage from the annexed areas through DISTRICT's facilities, this Agreement authorizes CITY to pass sewage through DISTRICT's facilities as specified herein.
2. Pursuant to this Agreement, DISTRICT shall allow discharge of sewage collected by CITY from areas outside DISTRICT's boundaries into DISTRICT's facilities, and shall transmit such sewage through DISTRICT's facilities to the downstream CITY collection system. CITY shall be responsible for the delivery of the sewage from the areas outside DISTRICT's boundaries to DISTRICT's facilities.

3. CITY shall have no duty or obligation to construct, upgrade or replace sewer facilities in CITY's service area that exist on the effective date of this Agreement, and DISTRICT shall accept such sewer facilities "as is" for delivery and transmission of sewage from areas outside DISTRICT's boundaries. After the effective date of this Agreement, any new sewer facilities that deliver or transmit sewage from areas outside DISTRICT's boundaries to DISTRICT shall be constructed consistent with CITY's approved Comprehensive Sanitary Sewer System Plan and adopted construction standards. CITY's sewer facilities outside DISTRICT's boundaries, and CITY's connection to DISTRICT's facilities, shall remain under the ownership and operation of CITY, separate and apart from DISTRICT.
4. DISTRICT shall accept sewage from CITY's facilities outside DISTRICT's boundaries until DISTRICT, in consultation with CITY, can demonstrate that there is insufficient capacity in DISTRICT's sewer system to accept additional sewage. After determining that there is such insufficient capacity, DISTRICT shall notify CITY in writing of DISTRICT's intention to restrict acceptance of, or to stop accepting, additional sewage from CITY twelve (12) months after the effective date of such notice. DISTRICT shall be under no obligation to construct any new or additional sewage facilities and DISTRICT shall not be required to accept additional sewage flows that will exceed the design capacity of the system.
5. Except as provided herein, should any portion of DISTRICT's sewer system become surcharged (i.e., sewage level rises above the crown [top] of the sewer pipe), due to combined flows from CITY and DISTRICT exceeding DISTRICT's capacity, CITY shall immediately take action to reduce flows to a level where the surcharging no longer exists. Any additional connections will only be allowed if and when CITY facilitates improvements to CITY's or DISTRICT's system to allow such connections without surcharging the DISTRICT's system. If either party has knowledge of surcharge conditions present, both parties will communicate and authorize temporary ceasing of issuance of additional permits for connections, which would contribute flow to DISTRICT's system, until said conditions are alleviated or remedied. CITY shall monitor altered system to confirm surcharge conditions have ceased.
6. DISTRICT shall provide for conveyance of CITY's sewage flows through future DISTRICT constructed capacity upgrades of DISTRICT's conveyance facilities. DISTRICT and CITY hereby agree to jointly fund design and construction and to design and construct conveyance capacity upgrades of DISTRICT's conveyance facilities to the downstream CITY system on a proportional cost sharing basis as defined herein.
7. When it becomes necessary for DISTRICT to construct conveyance system capacity upgrades for the benefit of DISTRICT's patrons, CITY shall participate in funding DISTRICT's capital costs of design and construction of those new conveyance upgrades based on the ratio of the designed peak conveyance capacity reserved for CITY flows to the total designed peak conveyance capacity of the new conveyance upgrades. CITY may unilaterally determine to increase the peak conveyance capacity reserved for CITY flows on the condition that CITY provide additional capital cost funding to comply with the funding ratio requirement. For purposes of this Agreement, for any future conveyance capacity upgrades to DISTRICT's sewer system where CITY participated in the capital cost and reserves a proportional share of design flow capacity in said upgrades, DISTRICT shall

remain as owner and operator and shall provide for the operation and maintenance of those systems until such time as DISTRICT's sewer system is conveyed to CITY.

8. CITY shall pay DISTRICT for all new connections to CITY's system that contribute flow to DISTRICT's facilities at the time of connection to CITY's system. The payments shall be a one-time charge of seventy percent (70%) of adopted DISTRICT Connection Fees in effect at the time of the connection to CITY's system. Acceptance of such payment shall be considered approval by DISTRICT of use of DISTRICT facilities by the new connections with no further compensation to DISTRICT required.
9. CITY shall report to DISTRICT, within sixty (60) days of actual hook-up, all new sewer connections to CITY sewer system that will result in flow through DISTRICT's facilities. The report shall include the ownership, property address, and billing address for the property served. CITY shall consult with DISTRICT regarding applications which have potential to substantially increase flows to DISTRICT's system.
10. All CITY facilities as described herein shall be constructed, operated and maintained by CITY. Where CITY utilizes any DISTRICT facilities, CITY shall be responsible for any damage to DISTRICT's facilities resulting from CITY's use, or use by its customers. Repairs to DISTRICT's facilities made necessary by such damage shall be performed as jointly determined by CITY and DISTRICT through review of repair and/or replacement options appropriate for the specific component of the facilities. The cost for such repairs, as jointly agreed upon by CITY and DISTRICT, will be billed to CITY. DISTRICT shall not be liable for any claims by third parties arising from acts or damages by CITY or its customers in using DISTRICT's facilities pursuant to this Agreement.

IN WITNESS WHEREOF, the PARTIES hereto have caused this Agreement to be executed as of the date set forth herein by their duly authorized representatives.

DISTRICT:

Southeast Moscow Water and Sewer District

Lois Pritchett
Lois Pritchett, President

CITY:

City of Moscow, Idaho

Bill Lambert
Bill Lambert, Mayor

ATTEST:

Marge Nelson
Marge Nelson, Secretary

Laurie M. Hopkins
Laurie M. Hopkins, City Clerk



**COOPERATIVE AGREEMENT BETWEEN NORTH LATAH COUNTY HIGHWAY DISTRICT AND
SOUTHEAST MOSCOW WATER AND SEWER DISTRICT
RELATING TO THE PROVISION OF SEWER SERVICES**

This Cooperative Agreement Relating to the Provision of Sewer Services ("Agreement") is entered into as of this 28 day of October, 2019 ("Effective Date"), by and between the North Latah County Highway District, a body politic and corporate of the state of Idaho ("NLCHD") and the Southeast Moscow Water and Sewer District, a governmental subdivision and body corporate of the state of Idaho ("SMWSD").

RECITALS:

A. NLCHD, organized as provided by law, is a body politic and corporate of the state of Idaho and, as such has the powers specified in Idaho Code section 40-1301 et seq. and in other Idaho statutes, which power lies in its commissioners or by agents or officers acting under their authority or authority of law.

B. NLCHD has exclusive general supervisory authority over all public highways, public streets and public rights-of-way under their jurisdiction and, acting through its commissioners, has power to manage and conduct the business and affairs of NLCHD.

C. SMWSD, organized as provided by law, is a governmental subdivision of the state of Idaho and a body corporate with all powers of a public or quasi-municipal corporation and, as such, has the powers specified in Idaho Code section 42-3201 et seq. and in other Idaho statutes, which power lies in its directors.

D. SMWSD has power and authority, as provided by law, to construct and maintain works and establish and maintain facilities, including along any public highway, to enter into contracts and agreements, cooperative and otherwise, affecting the affairs of the SMWSD for the purposes of providing for sewage disposal, to extend its sewer lines to an appropriate outlet.

E. It is the intent of the state of Idaho legislature, as expressed in Idaho Code section 40-210, that NLCHD and SMWSD, among other public highway agencies and utilities providing utility services to the public, engage in cooperative measures to provide economic utility facilities and services for residents of the state of Idaho.

F. NLCHD and SMWSD have been parties to that certain Right-of-Way Permit entered into on September 30, 1980 in regard to SMWSD's use of public highway and public rights-of-way under NLCHD's jurisdiction for the provision of sewer services to the public and now desire to enter into this Agreement to continue cooperative measures that provide the public served by SMWSD with economic sewer facilities and services.

WITNESSETH:

NOW THEREFORE, in consideration of the covenants and agreements hereinafter set forth to be kept and performed by NLCHD and SMWSD, it is mutually agreed as follows:

I. NLCHD AGREES:

1. To permit SMWSD to operate, administer, construct, install, establish, maintain, repair, remove, abandon and/or relocate facilities, equipment, pipelines and other works and/or installations (individually or collectively, as determined by context, "Facilities") to provide for sewage collection and disposal within SMWSD's jurisdiction under, upon and over public highways and/or public rights-of-way within NLCHD's jurisdiction in compliance with any and all applicable requirements set forth in the latest published edition of the (i) Idaho Standards For Public Works Construction (ISPWC) Manual and/or NLCHD modifications to the ISPWC Manual, (ii) Highway Standards and Policies for the NLCHD (iii) any and all applicable City of Moscow, Idaho public works standards and/or policies and (iv) any and all other, applicable federal, state and/or local statutes, rules, law, ordinances and/or regulations related thereto.
2. To take all reasonable actions to perform those duties and/or responsibilities of the NLCHD required by law and/or this Agreement in the furtherance of the intent and purposes of this Agreement.

II. SMWSD AGREES:

1. To operate, administer, construct, install, establish, maintain, repair, remove, abandon and/or relocate Facilities to provide for sewage collection and disposal within SMWSD's jurisdiction under, upon and/or over public highways and/or public rights-of-way within NLCHD's jurisdiction in compliance with any and all applicable requirements set forth in the latest published edition of the (i) Idaho Standards For Public Works Construction (ISPWC) Manual and/or NLCHD modifications to the ISPWC Manual, (ii) Highway Standards and Policies for the NLCHD (iii) any and all applicable City of Moscow, Idaho public works standards and/or policies and (iv) any and all other, applicable federal, state and/or local statutes, rules, law, ordinances and/or regulations related thereto.
2. To notify NLCHD in writing in advance of and to obtain NLCHD's prior written approval for any construction, installation, repair, removal and/or relocation of any Facilities (the "Work") located or to be located under, upon and/or over public highways and/or public rights-of-way within NLCHD's jurisdiction. In the event of an emergency, SMWSD may undertake Work without first obtaining NLCHD's prior written approval; provided, that SMWSD notify NLCHD immediately or as soon as reasonably possible and obtain any required approval as soon as reasonably possible after cessation of the emergency. For purposes of this section, "emergency" means a circumstance in which immediate repair to damaged or malfunctioning facilities is necessary to restore essential service or prevent imminent harm to persons or property.

3. To have an Idaho-licensed, professional engineer (i) prepare the plans and specifications for any Work considered public work under Chapter 12 of Title 54 of the Idaho Code and (ii) review construction of any such Work to ensure that applicable standards for any such Work are being used, met and, as applicable, tested prior to inspection and/or approval and acceptance by NLCHD. Work shall not be done without prior written approval of plans and specifications by NLCHD. With the exception the occurrence of an emergency, Work shall not be done without prior written approval of plans and specifications by NLCHD.

4. To maintain Facilities in a good, workmanlike, serviceable and safe condition, free from waste, so far as affected by SMWSD's operations, to the reasonable satisfaction of NLCHD, in a manner that NLCHD's improvements and/or other public or utility improvements located on public rights-of-way and public highways within NLCHD's jurisdiction shall not be damaged, impaired, or adversely affected, including, but not limited to, placing, maintaining, keeping and/or resetting manholes, manhole covers and any other Facilities located within the travelled surface of the roadway, in a manner and at a grade that, to the reasonable satisfaction of NLCHD, does not constitute a hindrance, obstacle or impediment to public travel.

5. To conduct all Work in an expedient manner with minimum interference or interruption of traffic on any public highways and public rights-of-way within NLCHD's jurisdiction and to take, at SMWSD's sole cost and expense, such measures as necessary or as directed by NLCHD to ensure the safety of those using any such public highways or public rights-of-way during periods of construction and/or maintenance.

6. At SMWSD's sole cost and expense, to remove any surplus material and clean up any work site and repair, restore and/or replace to NLCHD's then existing highway standards and subject to NLCHD's prior approval thereof, any damage to public highways and/or public rights-of-way and/or improvements thereon within NLCHD's jurisdiction caused and/or occasioned by SMWSD's Work and/or negligence and/or failure to abide by any term and/or provision of this Agreement. Notwithstanding the above, at NLCHD's sole election, NLCHD shall have the option to repair, restore and/or replace any such damage road surfaces, facilities or improvements at the expense of SMWSD and SMWSD shall reimburse NLCHD therefor upon written notice by NLCHD.

7. To expressly assume full responsibility for proper maintenance of the Facilities and full and strict liability for any and all damages of every nature to persons or property caused by SMWSD's operations, maintenance and/or Work in connection with SMWSD's rights and duties under this Agreement.

8. To release, defend (with counsel reasonably satisfactory to NLCHD), indemnify and hold harmless NLCHD and its commissioners, officers, employees, contractors and agents, their successors and assigns from and against all claims, causes of action, proceedings, losses, damages, liability, cost and expense, when arising or resulting from performance by SMWSD of operations, activities, maintenance and/or Work and/or lack of any of the foregoing, under,

upon and/or over public highways and/or public rights-of-way within NLCHD's jurisdiction or SMWSD's material breach of any provision of this Agreement. This indemnity shall survive termination of this Agreement. It is the intention of the parties that should any term of this indemnity provision be found to be void or unenforceable, the remainder of the provision shall remain in full force and effect.

9. To comply, at SMWSD's expense, with all applicable laws, regulations, rules and orders with respect to the use of public highways and/or public rights-of-way within NLCHD's jurisdiction, regardless of when they become or became effective, including, without limitation, those relating to construction, grading, signage, health, safety, noise, environmental protection, hazardous materials, waste disposal and water and air quality and to furnish satisfactory evidence of such compliance upon request of NLCHD. Before beginning any Work under this Agreement, SMWSD shall also obtain, at SMWSD's expense, any and all permits, licenses and approvals required for construction and operation of the Work and shall provide NLCHD with copies of such approvals.

III. NLCHD AND SMWSD AGREE:

10. This Agreement is made subject and subordinate to the prior and continuing rights set forth in Title 40 of the Idaho Code for the public to use public highways and/or public rights-of-way within NLCHD's jurisdiction and for NLCHD to exercise, discharge and/or perform rights and duties under law. NLCHD reserves all rights to construct, reconstruct and maintain and for the public to use any and all existing and future improvements and appurtenances to public highways and public rights-of-way within NLCHD's jurisdiction and, in the event that any public highways and/or public rights-of-way within NLCHD's jurisdiction is/are constructed and/or reconstructed in the future so as to require the relocation of SMWSD's Facilities, SMWSD shall assume and pay all costs incident to relocation of any such Facilities. This Agreement is also subject to all rights granted to others under Idaho law to construct, reconstruct, maintain and operate certain facilities, including but not limited to, oil and gas pipelines, electrical power systems, fiber optic and other telecommunication systems under, upon and over public highways and/or public rights-of-way within NLCHD's jurisdiction.

11. Any dispute arising between NLCHD and SMWSD regarding Work and/or maintenance of Facilities or repair and/or restoration of NLCHD's improvements and/or regarding any other construction related matter under this Agreement shall be resolved by an Idaho-licensed, professional engineer appointed by NLCHD and such professional engineer's decision in regard to any such matter shall be promptly complied with, as applicable, by SMWSD and/or NLCHD.

12. That the terms of this Agreement shall be reviewed at least every ten (10) years by NLCHD and SMWSD and that any proposed changes must be approved by NLCHD's Board of Commissioners and SMWSD's Board of Directors. This Agreement shall be in effect until December 31, 2044 or upon an earlier annexation or dissolution event by which either party's jurisdiction and/or authority in connection with this Agreement becomes null and void.

13. Notices. All notices required or permitted to be given under this Agreement shall be in writing and mailed postage prepaid by certified or registered mail, return receipt requested, or by personal delivery, to the appropriate address indicated below.

North Latah County Highway District
1132 East White Avenue
Moscow, Idaho 83843

with copy to: Landeck|Forseth|Luna
Attorneys at Law
PO Box 9344
Moscow, Idaho 83843

Southeast Moscow Water and Sewer District
3304 Schaper Road
Moscow, ID 83843

with copy to: Lake City Law Group, PLLC
Attorneys at Law
435 W. Hanley Ave., Ste. 101
Coeur d'Alene, Idaho 83815

14. Attorney Fees. If any legal proceeding should be instituted by either of the parties to enforce the terms of this Agreement or to determine the rights of the parties under this Agreement, the prevailing party in any such proceeding shall be awarded, in addition to all court costs, a reasonable sum for attorney fees.

15. The rights and obligations of the parties under this Agreement shall be interpreted in accordance with the laws of the state of Idaho.

16. This Agreement constitutes the complete expression of the agreement between the parties and supersedes any prior agreements, whether written or oral, concerning the subject of this Agreement, which are not fully expressed in this Agreement. The parties intend this Agreement to be an integrated agreement. Any modification of or addition to this Agreement must be approved in writing by both parties.

(Signatures on next page)

Moscow City Council



Regular Meeting ~Minutes~

www.ci.moscow.id.us

Laurie M. Hopkins
City Clerk

208.883.7015

Monday, May 6, 2024

7:00 PM

**Council Chambers
206 E. Third St.**

The meeting was called to order at 7:00 p.m.

PRESENT: Mayor Art Bettge, Bryce Blankenship, Drew Davis, Sandra Kelly, Hailey Lewis, Julia Parker, Gina Taruscio

STAFF: Bill Belknap, Mia Bautista, Cody Riddle, Mike Ray, David Schott, Tyler Palmer, Anthony Dahlinger, Karen Potter, Steve Schultz, Ryan Debaun, Karl Riedinger, Dustin Blaker, police officers, Laurie M. Hopkins

PLEDGE OF ALLEGIANCE

Council President Taruscio led the Pledge of Allegiance.

PROCLAMATION

Bike Month

Mayor Bettge read the proclamation and presented it to Tonya Denison.

Public Service Recognition Week

Mayor Bettge read the proclamation.

REGULAR AGENDA

1. Approval of Moscow City Council April 15, 2024 Minutes - Laurie M. Hopkins

Kelly moved and Davis seconded to approve the minutes of April 15, 2024 as presented. Roll Call Vote: Ayes: Unanimous. Nays: None. Abstentions: None. Motion carried.

2. Staff Recognition

Palmer provided a background of Steve Persell's time at the city and his completion of the Road Master program. He introduced Jayme Kootz from LHTAC.

Kootz explained the Road Master program has 22 courses and is similar to a master's degree. She presented a plaque and a jacket in honor of his completion.

3. Mayors Appointments (ACTION ITEM)

Mayor Bettge presented to the City Council for consideration the appointment of Garrett LaCivita to the Sustainable Environment Commission. Kelly moved and Taruscio seconded approval of the appointment. Roll Call Vote: Ayes: Unanimous. Nays: None. Abstentions: None. Motion carried.

4. Public Comment and Mayor's Response Period (limit 15 minutes)

David Hall (rural Moscow) recognized staff for the addition of event parking during the Renaissance Fair.

Breanna Sipley (Moscow), is advocating the development of a new resident owned community. The residents in her mobile home park have formed a co-op, she says there is little she can do while still under private ownership. Land trust options cannot guarantee the long-term fair and affordable housing residents deserve.

Susie James (rural Moscow) explained how a resident owned community is formed. She is still looking into funding for a new community. A resident owned community creates stability. She wants to see affordable housing for everyone in the community.

Kathy Dawes (Moscow), is running for Idaho Legislature. She spoke with Breanna Sipley and those issues will become more difficult due to a bill brought forth by Representative Mitchell. Local government should be able to implement protection. She requests the City Council create a local housing authority to be discussed at the next council meeting.

5. Oath of Office for Anthony Dahlinger as Police Chief - Laurie M. Hopkins

Belknap provided a brief introduction regarding the appointment of Anthony Dahlinger to the office of Police Chief. Hopkins administered the Oath of Office and his wife Jessica pinned his badge. Chief Dahlinger said words of thanks.

6. Citizen Commission Report – Moscow Pathways Commission – David Schott / Tanya Denison

Schott introduced Tanya Denison. Denison went through the members of the Commission and past accomplishments which include the annual Bike Tour and Bike to Work Day; the second Annual Pedestrian Tour and display banner revisions. This next year they will work on possible articles in the city utility billing newsletter; promote inclusivity through public engagement for people of all abilities and promoting ideas for improvements to pathways and connections. Council members commented and asked questions.

7. Public Hearing: Pine View Annexation, Comprehensive Plan Land Use Designation, Zoning Designation, and Preliminary Plat (ACTION ITEM) - Mike Ray

The applicants, Joe and Pam Juscen, are proposing a Comprehensive Plan land use designation, zoning designation, and a preliminary subdivision plat for a 22.93-acre property proposed to be annexed into the City of Moscow and generally located east of the current terminus of Moser Street. The current Comprehensive Plan Land Use Designation is Auto-Urban Residential and the proposal is to retain that designation. The zoning of the subject property is currently Agriculture Forestry (AF) and the proposal is to rezone to the Moderate Density, Single Family Residential (R-2) Zone. The proposed preliminary plat is a 22.93-acre area with 40 lots ranging from 12,077 square feet to 27,491 square feet in size, referred to as Pine View Subdivision. The City of Moscow Planning and Zoning Commission conducted a public hearing for the proposed Comprehensive Plan Land Use Designation, Rezone, and Preliminary Plat on March 27, 2024 and recommended approval with eight conditions.

PROPOSED ACTIONS: Conduct the public hearing upon the annexation, Comprehensive Plan land use designation, zoning designation, and preliminary plat and upon consideration of any testimony presented:

1. Approve the Annexation Ordinance under suspension of the rules requiring three complete and separate readings and that it be read by title and published by summary; or consider the Annexation Ordinance on first reading; or reject the Annexation Ordinance; or take other action as deemed appropriate.
2. If the Annexation Ordinance is approved, approve the proposed Comprehensive Plan Land Use

Designation Resolution and adopt the Planning and Zoning Commission Reasoned Statement of Relevant Criteria; or reject the proposed Comprehensive Plan Land Use Designation Resolution and direct staff to prepare a Reasoned Statement of Relevant Criteria; or take other action as deemed appropriate.

3. If the Annexation Ordinance is approved and the Comprehensive Plan Land Use Designation Resolution is approved, approve the proposed Zoning Ordinance under suspension of the rules requiring three complete and separate readings and that it be read by title and published by summary and adopt the Planning and Zoning Commission Reasoned Statement of Relevant Criteria; or consider the Zoning Ordinance on first reading; or reject the Zoning Ordinance and direct staff to prepare a Reasoned Statement of Relevant Criteria; or take other action as deemed appropriate.

4. If the Annexation Ordinance is approved, the Comprehensive Plan Land Use Designation Resolution is approved, and the proposed Zoning Ordinance is approved, approve the preliminary plat for Pine View Addition with the eight (8) conditions recommended by the Planning and Zoning Commission and the additional condition recommended by Staff and adopt the Planning and Zoning Commission Reasoned Statement of Relevant Criteria; or approve the preliminary plat with no conditions and direct staff to prepare a Reasoned Statement of Relevant Criteria; or reject the preliminary plat and direct staff to prepare a Reasoned Statement of Relevant Criteria; or take other such action deemed appropriate.

Mayor Bettge opened the public hearing at 7:39 p.m. Ray introduced the item as written above and described allowed uses in the comprehensive plan designation and zoning; utilities; streets and listed the recommended conditions of approval.

Scott Becker, representing the applicant, doesn't believe sewer would be overwhelmed as the lots are larger with less density. He doesn't anticipate any large issues with the conditions.

Mayor Bettge asked for testimony in favor.

Greg Bohach (Moscow) lives on Rose Court and is in support of the application. He does have one concern which is foot traffic from students and suggested a path adjacent to the tree farm.

Mayor Bettge asked for testimony in opposition. Hearing none, he asked for general testimony.

Katie Palch (Moscow) asked which elementary school this neighborhood would fall into.

Becker responded to comments saying he was in contact with the owner of the tree farm and he doesn't want anyone going through his property and has no intention of providing any of his property. Becker is unaware of the division for the elementary schools.

Mayor Bettge closed the hearing at 7:57 p.m.

Taruscio moved to approve the Annexation Ordinance under suspension of the rules requiring three complete and separate readings and that it be read by title and published by summary. Parker seconded. Roll Call Vote: Ayes: Unanimous. Nays: None. Abstentions: None. Motion carried.

Mayor Bettge read Ordinance #2024-06 by title:

AN ORDINANCE OF THE CITY OF MOSCOW, A MUNICIPAL CORPORATION OF THE STATE OF IDAHO; PROVIDING THAT LAND DESCRIBED IN SECTION 2 OF THIS ORDINANCE BE ANNEXED TO THE CITY OF MOSCOW; PROVIDING THAT THE PROVISIONS OF THIS ORDINANCE BE DEEMED SEVERABLE; PROVIDING FOR THIS ORDINANCE TO BE IN FULL FORCE AND EFFECT FROM AND AFTER PASSAGE, APPROVAL AND PUBLICATION ACCORDING TO LAW.

Kelly moved to approve the proposed Comprehensive Plan Land Use Designation Resolution and adopt the Planning and Zoning Commission Reasoned Statement of Relevant Criteria. Davis seconded. Roll Call Vote: Ayes: Unanimous. Nays: None. Abstentions: None. Motion carried.

Parker moved to approve the proposed Zoning Ordinance under suspension of the rules requiring three complete and separate readings and that it be read by title and published by summary and adopt the Planning and Zoning Commission Reasoned Statement of Relevant Criteria. Kelly seconded. Roll Call Vote: Ayes: Unanimous. Nays: None. Abstentions: None. Motion carried.

Mayor Bettge read Ordinance #2024-07 by title:

AN ORDINANCE OF THE CITY OF MOSCOW, IDAHO, A MUNICIPAL CORPORATION OF THE STATE OF IDAHO; PROVIDING FOR THE REZONING OF A TWENTY-TWO POINT NINE THREE (22.93) ACRE PROPERTY, DESCRIBED IN SECTION 2, FROM AGRICULTURE/FORESTRY (AF) TO MODERATE DENSITY, SINGLE FAMILY RESIDENTIAL (R-2); PROVIDING THAT THE PROVISIONS OF THIS ORDINANCE BE DEEMED SEVERABLE; PROVIDING FOR THIS ORDINANCE TO BE IN FULL FORCE AND EFFECT FROM AND AFTER ITS PASSAGE, APPROVAL AND PUBLICATION ACCORDING TO LAW.

Taruscio moved to approve the preliminary plat for Pine View Addition with the eight (8) conditions recommended by the Planning and Zoning Commission and the additional condition recommended by Staff and adopt the Planning and Zoning Commission Reasoned Statement of Relevant Criteria. Kelly seconded. Roll Call Vote: Five (5): Unanimous. Nays: One (Lewis). Abstentions: None. Motion carried.

8. Public Hearing: Wildrose Court Annexation, Comprehensive Plan Land Use Designation, Zoning Designation, Planned Unit Development, and Preliminary Plat (ACTION ITEM) - Mike Ray

The applicant, Provvidenza, LLC, is proposing a Comprehensive Plan land use designation, zoning designation, Planned Unit Development (PUD), and preliminary subdivision plat a 2.53-acre property proposed to be annexed into the City of Moscow and generally located east of the current terminus of Wildrose Drive and south of Flomer Lane within the City of Moscow. The current Comprehensive Plan Land Use Designation is Auto-Urban Residential and the proposal is to retain the Auto-Urban Residential designation. The zoning of the subject property is currently Low Density, Single Family Residential (R-1) Zone and the proposal is to rezone to the Moderate Density, Single Family Residential (R-2) Zone. The proposed preliminary plat and Planned Unit Development (PUD) of the 2.53-acre area is to create 16 lots ranging from 3,000 square feet to 10,666 square feet in size, referred to as Wildrose Court subdivision. The City of Moscow Planning and Zoning Commission conducted a public hearing for the proposed Comprehensive Plan Land Use Designation, Rezone, PUD, and Preliminary Plat on March 27, 2024 and recommended approval with six conditions.

PROPOSED ACTIONS: Conduct the public hearing upon the annexation, Comprehensive Plan land use designation, zoning designation, PUD, and preliminary plat and upon consideration of any testimony presented:

1. Approve the Annexation Ordinance under suspension of the rules requiring three complete and separate readings and that it be read by title and published by summary; or consider the Annexation Ordinance on first reading; or reject the Annexation Ordinance; or take other action as deemed appropriate.
2. If the Annexation Ordinance is approved, approve the proposed Comprehensive Plan Land Use Designation Resolution and adopt the Planning and Zoning Commission Reasoned Statement of Relevant Criteria; or reject the proposed Comprehensive Plan Land Use Designation Resolution and direct staff to prepare a Reasoned Statement of Relevant Criteria; or take other action as deemed

appropriate.

3. If the Annexation Ordinance is approved and Comprehensive Plan Land Use Designation Resolution is approved, approve the proposed Zoning Ordinance under suspension of the rules requiring three complete and separate readings and that it be read by title and published by summary and adopt the Planning and Zoning Commission Reasoned Statement of Relevant Criteria; or consider the Zoning Ordinance on first reading; or reject the Zoning Ordinance and direct staff to prepare a Reasoned Statement of Relevant Criteria; or take other action as deemed appropriate.

4. If the Annexation Ordinance is approved, the Comprehensive Plan Land Use Designation Resolution is approved, and the proposed Zoning Ordinance is approved, approve the PUD for Wildrose Court with one (1) condition and adopt the Planning and Zoning Commission Reasoned Statement of Relevant Criteria; or approve the PUD with no conditions and direct staff to prepare a Reasoned Statement of Relevant Criteria; or reject the PUD and direct staff to prepare a Reasoned Statement of Relevant Criteria; or take other such action deemed appropriate.

5. If the Annexation Ordinance is approved, the Comprehensive Plan Land Use Designation Resolution is approved, the proposed Zoning Ordinance is approved, and the PUD is approved, approve the preliminary plat for Wildrose Court Addition with five (5) conditions and adopt the Planning and Zoning Commission Reasoned Statement of Relevant Criteria; or approve the preliminary plat with no conditions and direct staff to prepare a Reasoned Statement of Relevant Criteria; or reject the preliminary plat and direct staff to prepare a Reasoned Statement of Relevant Criteria; or take other such action deemed appropriate.

Mayor Bettge opened the hearing at 8:07 p.m. Ray introduced the item as written above and described the zoning and preliminary plat. The interior street is a private drive and there is open space and a pathway in the northwest corner of the plat. The applicant has proposed a PUD to coincide with the preliminary plat and is requesting numerous Zoning Code deviations to accommodate smaller lot sizes and more compact development. Fifteen of the lots would have a similar style of single-family home of approximately 1,500 to 1,600 sf in size with multiple floor plan options per floor. Illustrations of the homes were shown. Ray went over the density bonuses which included sustainable development practices, pedestrian and bicycle connectivity, and landscaping.

In response to Council questions, Belknap provided a history on the Southeast Sewer District area. Ray said staff is working with ITD about a right turn lane onto Roxbury.

Scott Becker, representing the applicant, said when the developer was looking at development options, they were going to divide into five lots with a cul-de-sac and leave it in the county but that wasn't allowed in the Area of City Impact. This proposal provides the extra density the City needs. One challenge was making sure the stormwater was captured on the site and didn't flow to the other properties. Blankenship asked if the development is too dense. Becker said they reduced this from 18 to 16 homes.

Mayor Bettge asked for testimony in favor. Hearing none, he asked for testimony in opposition. He said the City received a letter from Scott and Ruth Butler in opposition and it was entered into the record.

JJ McCallie (Moscow) said he moved to Moscow in 2022 from Eugene and spoke on the density reductions. With a 25% reduction in setbacks, a home will be placed 15 feet away from his fence. The reductions make the development more of a R-3 Zone which is not in character with the neighborhood. He feels it is appropriate to at least require privacy fencing. He feels the proposal should be rejected.

Katie Palch (Moscow) feels the density is too much pointing out there aren't 16 homes in the R-1 Zone. There will be increased parking on Roxbury, Ridgeview and Wildrose. She feels the proposal is not in character with the neighborhood.

Roy Derrick (Moscow) is adjacent to the development and will have 2 houses 15 feet from his property looking down into his back yard. A concern is safety in regards to the connection of Roxbury to Highway 8. He questions why this development is super high density. He pointed out three high density developments that the homes are only two floors and recommends these homes are no larger than two floors.

No general testimony was provided.

Dave Dail (applicant) said he has been working with the city and county for 2 years and had four proposals that wouldn't work. He is providing needed homes.

Mayor Bettge closed the hearing at 8:46 p.m.

Lewis said there is an increased need for density; likes it is not a through street, it is infill which is encouraged, and feels it was an honest effort by the property owner to find something that works.

Davis said he supports growth and the council has advocated for density. When living in the Area of City Impact, growth is expected.

Taruscio agreed infill has been advocated for. She heard the testimony and understands about having a house so close. While growth is not comfortable, she is in favor.

Kelly also agreed the Council has advocated for growth; the testimony is heartbreaking but it is an open area and will serve a lot of needs. She said the Council is representing the overall health of the city.

Parker thinks it is good development and meets the criteria. She feels it is nice to have smaller single family units and is happy to see a diversity of housing in the area. If we stop growing a housing stock, no one will be able to continue to live here.

Blankenship felt nervous about the density of the 15 units and the size and impact on the neighbors. He respects the need for more accessible housing and appreciated the applicant trying to make the units environmentally friendly.

Mayor Bettge called a recess at 9:00 p.m. The meeting reconvened at 9:01 p.m.

Taruscio moved to approve the Annexation Ordinance under suspension of the rules requiring three complete and separate readings and that it be read by title and published by summary. Kelly seconded. Roll Call Vote: Ayes: Five (5). Nays: One (Blankenship). Abstentions: None. Motion carried.

Mayor Bettge read Ordinance 2024-08 by title:

AN ORDINANCE OF THE CITY OF MOSCOW, IDAHO, A MUNICIPAL CORPORATION OF THE STATE OF IDAHO; PROVIDING THAT LAND DESCRIBED IN SECTION 2 OF THIS ORDINANCE BE ANNEXED TO THE CITY OF MOSCOW; PROVIDING THAT THE PROVISIONS OF THIS ORDINANCE BE DEEMED SEVERABLE; PROVIDING FOR THIS ORDINANCE TO BE IN FULL FORCE AND EFFECT FROM AND AFTER PASSAGE, APPROVAL AND PUBLICATION ACCORDING TO LAW.

Kelly moved to approve the proposed Comprehensive Plan Land Use Designation Resolution and adopt the Planning and Zoning Commission Reasoned Statement of Relevant Criteria. Davis seconded. Roll Call Vote: Ayes: Five (5). Nays: One. (Blankship). Abstentions: None. Motion carried.

Kelly moved, Taruscio seconded, to approve the proposed Zoning Ordinance under suspension of the rules requiring three complete and separate readings and that it be read by title and published by summary and adopt the Planning and Zoning Commission Reasoned Statement of Relevant Criteria. Roll Call Vote: Ayes: Five (5). Nays: One (Blankenship). Abstentions: None. Motion carried.

Mayor Bettge read Ordinance 2024-09 by title:

AN ORDINANCE OF THE CITY OF MOSCOW, IDAHO, A MUNICIPAL CORPORATION OF THE STATE OF IDAHO; PROVIDING FOR THE REZONING OF AN APPROXIMATELY TWO POINT FIVE THREE (2.53) ACRE PROPERTY, DESCRIBED IN SECTION 2, FROM LOW DENSITY, SINGLE FAMILY RESIDENTIAL (R-1) TO MODERATE DENSITY, SINGLE FAMILY RESIDENTIAL (R-2); PROVIDING THAT THE PROVISIONS OF THIS ORDINANCE BE DEEMED SEVERABLE; PROVIDING FOR THIS ORDINANCE TO BE IN FULL FORCE AND EFFECT FROM AND AFTER ITS PASSAGE, APPROVAL AND PUBLICATION ACCORDING TO LAW.

Taruscio moved to approve the PUD for Wildrose Court with one (1) condition and adopt the Planning and Zoning Commission Reasoned Statement of Relevant Criteria. Kelly seconded. Roll Call Vote: Ayes: Four (4). Nays: Two (Blankenship, Lewis). Abstentions: None. Motion carried.

Taruscio moved to approve the preliminary plat for Wildrose Court Addition with five (5) conditions and adopt the Planning and Zoning Commission Reasoned Statement of Relevant Criteria. Kelly seconded. Roll Call Vote: Ayes: Four (4). Nays: Two (Blankenship, Lewis). Abstentions: None. Motion carried.

The Mayor called a recess at 9:03 p.m. The meeting reconvened at 9:09 p.m.

9. Professional Services Agreement-East City Park Stage Conceptual Design (ACTION ITEM) - Cody Riddle

Staff is seeking Council authorization to enter into a Professional Services Agreement with Design West Architects, at a cost of \$18,700. If approved, this will result in a 30% conceptual design and updated cost estimate, that will inform a funding and timing strategy for replacement of the stage at East City Park.

PROPOSED ACTIONS: Approve the Professional Services Agreement with Design West Architects, or take other action as deemed appropriate.

Riddle introduced the item as written above adding the project was advanced within the capital improvement plan. The design will build off of the previous design and outreach and will still reach out to the larger groups using the stage. Design West worked on this project previously, bathroom design, outreach and three alternatives. The 30% is primarily focused on the stage and when the project goes to full construction design, the full site improvements would be included.

Lewis likes the load in/out for the stage footprint where it is. She is worried about what will be paved in order to create new in/out access. She does not want to move the agreement forward as is.

In response to questions, Belknap said the previous design established the location of the bathroom with the intent the stage be supported by the bathroom electrical and mechanical. If the Council feels it needs to be somewhere else, the project can start from scratch.

Parker said the information was already gathered and doesn't know what would be benefitted by starting over. Kelly said she agrees with Lewis on the loading area. She would like to take a longer look and get more input as the public may have different opinions now. Taruscio said she can see the urgency for a covered stage but is not a fan of reinventing wheel. Belknap said staff would need six months to rescope

the project and can do so if that is the Council's desire. Blankenship didn't like idea of committing to the plan and wanted to pause. Belknap provided more background and information.

Davis moved to approve the agreement. Taruscio seconded. Roll Call Vote: Ayes: Three (Parker, Davis, Taruscio). Nays: Three (Blankenship, Lewis, Kelly). Abstentions: None. Mayor Bettge broke the tie with an aye vote. Motion carried.

Discussion ensued regarding the previous study, layout and concerns.

10. Franchise Agreement with the Port of Lewiston (ACTION ITEM) - Bill Belknap

The Port of Lewiston recently received a grant to install fiber optic cables from Lewiston to the City of Moscow. The Ports focus is providing long-haul service for internet service providers and not end-user services. City staff were approached by the Port with a request to install fiber optic cables within the City's public rights-of-way. The Port has a franchise agreement with the City of Lewiston to allow the installation of fiber optics cables within Lewiston. Staff has prepared a franchise agreement with the Port of Lewiston to allow the proposed fiber optic cable installation within the City's public rights-of-way under certain terms and conditions. In exchange, the Port will pay the City 5% of the gross revenues they receive from leasing fiber to internet service providers. Additionally, Idaho Code requires that franchise agreements be authorized by Ordinance. Staff has prepared an ordinance for the Council's consideration.

PROPOSED ACTIONS: Approve the Ordinance under suspension of the rules requiring three complete and separate readings and that it be read by title and published by summary; or consider the Ordinance on first reading and that it be read by title; or reject the Ordinance; or take such other action deemed appropriate.

Belknap introduced the item as written above adding the agreement is modeled off a City of Lewison agreement and has a term of 20 years. The primary focus is multiple pathways to major hub locations and will use rural paths away from the other fiber lines on Highway 95 so there is redundancy and prevents in the case of a dig or emergency, all fiber being down at the same time.

Blankenship moved to approve the Ordinance under suspension of the rules requiring three complete and separate readings and that it be read by title and published by summary. Parker seconded. Roll Call Vote: Ayes: Unanimous. Nays: None. Abstentions: None. Motion carried.

Mayor Bettge read Ordinance 2024-10 by title:

AN ORDINANCE OF THE CITY OF MOSCOW, IDAHO, A MUNICIPAL CORPORATION OF THE STATE OF IDAHO; GRANTING A NON-EXCLUSIVE FRANCHISE TO THE PORT OF LEWISTON TO INSTALL, OPERATE AND MAINTAIN FIBER OPTIC LINES AND RELATED FACILITIES; PROVIDING FOR AND ESTABLISHING A FRANCHISE FEE; PROVIDING THAT THE PROVISIONS OF THIS ORDINANCE BE DEEMED SEVERABLE; AND PROVIDING FOR THIS ORDINANCE TO BE IN FULL FORCE AND EFFECT FROM THE DATE OF ITS PASSAGE, APPROVAL, AND PUBLICATION ACCORDING TO LAW.

11. Port of Lewiston Conduit Lease Agreement (ACTION ITEM) - Bill Belknap

The Port of Lewiston recently received a grant to install fiber optic cables from Lewiston to the City of Moscow. The Ports focus is providing long-haul service for internet service providers and not end-user services. City staff were approached by the Port with a request to lease available conduit pathways along their proposed installation route which includes a pathway from the Mountain View and Highway 8 intersection to the intersection of Sweet Avenue and South Main Street. The City has an existing spare conduit that is not currently being utilized and which can be made available for the Port's use. Staff has prepared a lease agreement for the subject conduit which includes a requirement

for the installation of an innerduct (a divider within the conduit that divides the conduit into multiple smaller pathways) which will preserve future capacity in the conduit for the City's use. The lease term is 20 years with a one-time lump sum lease payment of \$33,101 due to the grant funding for the project.

PROPOSED ACTIONS: Approve the proposed lease agreement; or take other action as deemed appropriate.

Belknap introduced the item as written above.

Parker moved to approve the lease agreement. Taruscio seconded. Roll Call Vote: Ayes: Unanimous. Nays: None. Abstentions: None. Motion carried.


REPORTS

Due to the late hour, reports were postponed.


ADJOURN

It was moved, seconded and mutually agreed upon to adjourn at 9:49 p.m.

ATTEST:



Laurie M. Hopkins, City Clerk





Arthur D. Bettge, Mayor

**BEFORE THE CITY COUNCIL
OF THE CITY OF MOSCOW, COUNTY OF LATAH,
STATE OF IDAHO**

REASONED STATEMENT OF RELEVANT CRITERIA AND STANDARDS

REASONED STATEMENT OF RELEVANT CRITERIA AND STANDARDS REGARDING THE REVIEW OF A TWENTY-TWO POINT NINE THREE (22.93) ACRE AREA OF LAND PROPOSED TO BE ANNEXED INTO THE CITY OF MOSCOW AND GENERALLY LOCATED EAST OF THE CURRENT TERMINUS OF MOSER STREET.

WHEREAS, the applicant filed an application for Annexation, Comprehensive Plan Land Use Designation, Rezone, and Preliminary Plat on February 8, 2024; and

WHEREAS, this matter came before the Moscow Planning and Zoning Commission during a duly noticed public hearing on March 27, 2024; and

WHEREAS, this matter came before the Moscow City Council during a duly noticed public hearing on May 6, 2024; and

WHEREAS, having reviewed the application, including all exhibits entered, and having considered the issues presented by the applicant and the opponents:

THE CITY COUNCIL OF THE CITY OF MOSCOW, IDAHO, AFTER DUE DELIBERATION AND CONSIDERATION, HEREBY CONCLUDES:

I. RELEVANT FACTS AND CONCLUSIONS

1. The City Council considered the request pursuant to the City of Moscow 2019 Comprehensive Plan, City of Moscow Zoning Ordinance, the Local Land Use Planning Act, and other applicable development regulations.
2. The subject property is a 22.93-acre property proposed to be annexed into the City of Moscow and generally located east of the current terminus of Moser Street.
3. The subject property is currently an open field with the exception of two driveways providing access to two single family dwellings to the east of the subject property. The Moser Estates subdivisions are located to the west of the subject property and Moser Park is located to the southwest. The Rolling Hills 10th Subdivision is currently being platted to the south, which will extend Third Street to the subject property. Agricultural land is located to the east and rural residential properties are located to the north.
4. Within the 2019 Moscow Comprehensive Plan, the subject property is currently designated as Auto-Urban Residential and the proposal is to retain that designation.
5. Auto-Urban Residential (AU-R) designated areas,

“contain predominantly single-family detached homes on lots ranging from 7,000 to 11,000 square feet in size and are more isolated from surrounding uses which may require residents to rely more on automobile transportation. This designation includes those areas generally anticipated to be developed for low- to moderate-density residential uses at densities between three to six units per acre which could include a mix of detached single-family, twinhome, and townhome residential dwellings. Appropriate current zoning for Auto-Urban Residential designated areas include Low Density Residential (R-1), Moderate Density Single Family Residential (R-2) and Medium Density Residential (R-3) in order to include a mixture of attached and detached dwellings where appropriate.”

6. The subject property and adjacent properties immediately to the north and east within Latah County are currently designated as Agriculture/Forestry (AF).
7. Properties to the west and south of the subject property are currently designated as the Moderate Density, Single Family Residential (R-2) Zoning District.
8. The subject property has existing access via Moser Street, and will have access via Third Street when the Rolling Hills 10th Subdivision is extended to the southern portion of the property, which is anticipated this summer. Moser Street is a local neighborhood street which will be constructed to the 28-foot-wide street standard which includes curb, gutter, tree lawns, and sidewalks on both sides of the street and on-street parking on one side of the street.
9. The applicant conducted a neighborhood meeting with affected property owners within 600 feet of the subject property on October 5, 2023 to discuss the proposed rezone.

BASED ON THE ABOVE RELEVANT FACTS AND CONCLUSIONS, THE CITY COUNCIL OF THE CITY OF MOSCOW HEREBY FINDS THE FOLLOWING RELEVANT CRITERIA AND STANDARDS:

II. RELEVANT CRITERIA AND STANDARDS

1. **The proposed Comprehensive Plan amendment is consistent with Comprehensive Plan goals, objectives, and implementation actions.** The proposal to retain the existing designation of Auto-Urban Residential is consistent with the purposes, goals, objectives and policies of the Comprehensive Plan and are consistent with the surrounding properties, as well as the surrounding land use and development patterns.
2. **The proposed Comprehensive Plan amendment would provide for the logical and orderly location of land uses, community services and facilities.** The City Council finds that the proposed designation of Auto-Urban Residential is logical and harmonious with the surrounding land uses and development, and is consistent with the land use designations of the surrounding property to the west and south of the subject property.
3. **The uses expected to occur as a result of the Comprehensive Plan amendment will be compatible with the surrounding area.** The zoning districts that are consistent with the Auto-Urban Residential designation exist within the current City Limits boundary to the west and to the south.
4. **The size, type, and density of development expected to occur as a result of the Comprehensive Plan amendment will not place an undue burden upon delivery of services provided by any political subdivision within the planning jurisdiction.** The proposed designation is suitable for the area and will not unduly burden the neighborhood of public infrastructure. The subject property


has direct access, via Moser Street and eventually Third Street, as well as sufficient and available public utility services to meet the needs of existing and future development.

5. **The proposed Comprehensive Plan amendment is deemed to be appropriate in consideration of changing conditions within the community that are not reflected within the current Comprehensive Plan (such as new development or re-development, land use patterns and/or trends, traffic patterns and/or volume, market demands, community vision and/or needs, capital improvements, or new or revised City plans).** The proposal is to retain the existing Comprehensive Plan land use designation of Auto-Urban Residential, which is consistent with the surrounding area.

III. DECISION

Based on the above Reasoned Statement of Relevant Criteria, the City of Moscow City Council approves the proposal to retain the current Comprehensive Plan Land Use Designation of Auto-Urban Residential for the 22.93-acre property generally located east of the current terminus of Moser Street.

PASSED BY THE CITY COUNCIL OF THE CITY OF MOSCOW this 6th day of May, 2024.



Arthur D. Bettge, Mayor

**BEFORE THE CITY COUNCIL
OF THE CITY OF MOSCOW, COUNTY OF LATAH,
STATE OF IDAHO**

REASONED STATEMENT OF RELEVANT CRITERIA AND STANDARDS

REASONED STATEMENT OF RELEVANT CRITERIA AND STANDARDS REGARDING A REQUEST FOR THE REZONE OF A TWENTY-TWO POINT NINE THREE (22.93) ACRE AREA OF LAND PROPOSED TO BE ANNEXED INTO THE CITY OF MOSCOW AND GENERALLY LOCATED EAST OF THE CURRENT TERMINUS OF MOSER STREET FROM THE AGRICULTURE FORESTRY (AF) ZONE TO THE MODERATE DENSITY, SINGLE FAMILY RESIDENTIAL (R-2) ZONE.

WHEREAS, the applicant filed an application for Annexation, Comprehensive Plan Land Use Designation, Rezone, and Preliminary Plat on February 8, 2024; and

WHEREAS, this matter came before the Moscow Planning and Zoning Commission during a duly noticed public hearing on March 27, 2024; and

WHEREAS, this matter came before the Moscow City Council during a duly noticed public hearing on May 6, 2024; and

WHEREAS, having reviewed the application, including all exhibits entered, and having considered the issues presented by the applicant and the opponents:

THE CITY COUNCIL OF THE CITY OF MOSCOW, IDAHO, AFTER DUE DELIBERATION AND CONSIDERATION, HEREBY CONCLUDES:

I. RELEVANT FACTS AND CONCLUSIONS

1. The City Council considered the request pursuant to the City of Moscow 2019 Comprehensive Plan, City of Moscow Zoning Ordinance, the Local Land Use Planning Act, and other applicable development regulations.
2. The subject property is a 22.93-acre property proposed to be annexed into the City of Moscow and generally located east of the current terminus of Moser Street.
3. The subject property is currently an open field with the exception of two driveways providing access to two single family dwellings to the east of the subject property. The Moser Estates subdivisions are located to the west of the subject property and Moser Park is located to the southwest. The Rolling Hills 10th Subdivision is currently being platted to the south, which will extend Third Street to the subject property. Agricultural land is located to the east and rural residential properties are located to the north.
4. Within the 2019 Moscow Comprehensive Plan, the subject property is currently designated as Auto-Urban Residential and the proposal is to retain that designation.

5. Auto-Urban Residential (AU-R) designated areas,

“contain predominantly single-family detached homes on lots ranging from 7,000 to 11,000 square feet in size and are more isolated from surrounding uses which may require residents to rely more on automobile transportation. This designation includes those areas generally anticipated to be developed for low- to moderate-density residential uses at densities between three to six units per acre which could include a mix of detached single-family, twinhome, and townhome residential dwellings. Appropriate current zoning for Auto-Urban Residential designated areas include Low Density Residential (R-1), Moderate Density Single Family Residential (R-2) and Medium Density Residential (R-3) in order to include a mixture of attached and detached dwellings where appropriate.”
6. The subject property and adjacent properties immediately to the north and east within Latah County are currently designated as Agriculture/Forestry (AF).
7. Properties to the west and south of the subject property are currently designated as the Moderate Density, Single Family Residential (R-2) Zoning District.
8. The applicant is proposing to rezone the subject property from the Agriculture Forestry (AF) Zone to the Moderate Density, Single Family Residential (R-2) Zoning District.
9. According to the City of Moscow Zoning Code, the R-2 Zoning District is a moderate density residential zone appropriate where the following circumstances are present:
 1. Single family dwellings predominate.
 2. The terrain is not harshly irregular and smaller lot sizes can be accommodated without extensive earthwork.
 3. Utilities and other public facilities are adequate for the densities allowed.
 4. Existing lot development patterns and policies embodied in the Plan will also guide application of this zoning district.
10. Uses permitted within the R-2 Zone include single-family residential dwellings, market and community gardens, group child care facilities, and public parks and recreational facilities. The minimum lot size for parcels within the R-2 Zone is 7,000 sf and the minimum lot width is 60 feet.
11. The subject property has existing access via Moser Street, and will have access via Third Street when the Rolling Hills 10th Subdivision is extended to the southern portion of the property, which is anticipated this summer. Moser Street is a local neighborhood street which will be constructed to the 28-foot-wide street standard which includes curb, gutter, tree lawns, and sidewalks on both sides of the street and on-street parking on one side of the street.
12. The applicant conducted a neighborhood meeting with affected property owners within 600 feet of the subject property on October 5, 2023 to discuss the proposed rezone.

BASED ON THE ABOVE RELEVANT FACTS AND CONCLUSIONS, THE CITY COUNCIL OF THE CITY OF MOSCOW HEREBY FINDS THE FOLLOWING RELEVANT CRITERIA AND STANDARDS:


II. RELEVANT CRITERIA AND STANDARDS

1. **The proposed rezone is consistent with Comprehensive Plan goals, objectives, and implementation actions.** The proposed rezone is consistent with the proposed 2019 Comprehensive Plan Land Use Designations of Auto-Urban Residential.
2. **The proposed rezone would provide for the logical and orderly location of land uses and community services and facilities.** The proposed designation of the Moderate Density, Single Family Residential (R-2) Zoning District provides for the continuation of the existing R-2 Zone to the west and to the south. The proposed zoning and uses are consistent with the surrounding area and will not unduly burden the neighborhood of public infrastructure.
3. **The uses expected to occur as a result of the rezone will be compatible with the surrounding area.** The proposed zoning is consistent with adjacent zoning districts and will create a logical and orderly zoning configuration for the subject area. The adjacent properties to the west and south of the subject property are residential subdivisions which are the same designation as the subject property.
4. **The size, type, and density of development expected to occur as a result of the rezone will not place an undue burden upon delivery of services provided by any political subdivision within the planning jurisdiction.** The proposed zoning and uses are suitable for the area and will not unduly burden the area of public infrastructure.
5. **The size, type, and density of development expected to occur as a result of the rezone can be adequately served by the existing transportation network, public facilities and services.** The subject property has street access via Moser Street and eventually Third Street, which can adequately serve any proposed development allowed in the R-2 Zone. The subject property has sufficient and available public utility services to meet the needs of existing and future development.

III. DECISION

Based on the above Reasoned Statement of Relevant Criteria, the City Council of the City of Moscow approves the rezone request for the twenty-two point nine three (22.93) acre property generally located east of the current terminus of Moser Street from the Agriculture Forestry (AF) Zone to the Moderate Density, Single Family Residential (R-2) Zone with no conditions.

PASSED BY THE CITY COUNCIL OF THE CITY OF MOSCOW this 6th day of May, 2024.


Arthur D. Bettge, Mayor

**BEFORE THE CITY COUNCIL
OF THE CITY OF MOSCOW, COUNTY OF LATAH,
STATE OF IDAHO**

REASONED STATEMENT OF RELEVANT CRITERIA AND STANDARDS

REASONED STATEMENT OF RELEVANT CRITERIA AND STANDARDS REGARDING A REQUEST FOR A PRELIMINARY SUBDIVISION PLAT OF A TWENTY-TWO POINT NINE THREE (22.93) ACRE AREA OF LAND PROPOSED TO BE ANNEXED INTO THE CITY OF MOSCOW AND GENERALLY LOCATED EAST OF THE CURRENT TERMINUS OF MOSER STREET, KNOWN AS PINE VIEW ADDITION TO THE CITY OF MOSCOW, IDAHO.

WHEREAS, the applicant filed an application for Annexation, Comprehensive Plan Land Use Designation, Rezone, and Preliminary Plat on February 8, 2024; and

WHEREAS, this matter came before the Moscow Planning and Zoning Commission during a duly noticed public hearing on March 27, 2024; and

WHEREAS, this matter came before the Moscow City Council during a duly noticed public hearing on May 6, 2024; and

WHEREAS, having reviewed the application, including all exhibits entered, and having considered the issues presented by the applicant and the opponents:

THE CITY COUNCIL OF THE CITY OF MOSCOW, IDAHO, AFTER DUE DELIBERATION AND CONSIDERATION, HEREBY CONCLUDES:

I. RELEVANT FACTS AND CONCLUSIONS

1. The City Council considered the request pursuant to the City of Moscow 2019 Comprehensive Plan, City of Moscow Zoning Ordinance, the Local Land Use Planning Act, and other applicable development regulations.
2. The subject property is a 22.93-acre property proposed to be annexed into the City of Moscow and generally located east of the current terminus of Moser Street.
3. The subject property is currently an open field with the exception of two driveways providing access to two single family dwellings to the east of the subject property. The Moser Estates subdivisions are located to the west of the subject property and Moser Park is located to the southwest. The Rolling Hills 10th Subdivision is currently being platted to the south, which will extend Third Street to the subject property. Agricultural land is located to the east and rural residential properties are located to the north.
4. Within the 2019 Moscow Comprehensive Plan, the subject property is currently designated as Auto-Urban Residential and the proposal is to retain that designation.
5. Auto-Urban Residential (AU-R) designated areas,

“contain predominantly single-family detached homes on lots ranging from 7,000 to 11,000 square feet in size and are more isolated from surrounding uses which may require residents to rely more on automobile transportation. This designation includes those areas generally anticipated to be developed for low- to moderate-density residential uses at densities between three to six units per acre which could include a mix of detached single-family, twinhome, and townhome residential dwellings. Appropriate current zoning for Auto-Urban Residential designated areas include Low Density Residential (R-1), Moderate Density Single Family Residential (R-2) and Medium Density Residential (R-3) in order to include a mixture of attached and detached dwellings where appropriate.”

6. The subject property and adjacent properties immediately to the north and east within Latah County are currently designated as Agriculture/Forestry (AF).
7. Properties to the west and south of the subject property are currently designated as the Moderate Density, Single Family Residential (R-2) Zoning District.
8. The applicant is proposing to rezone the subject property from the Agriculture Forestry (AF) Zone to the Moderate Density, Single Family Residential (R-2) Zoning District.
9. According to the City of Moscow Zoning Code, the R-2 Zoning District is a moderate density residential zone appropriate where the following circumstances are present:
 1. Single family dwellings predominate.
 2. The terrain is not harshly irregular and smaller lot sizes can be accommodated without extensive earthwork.
 3. Utilities and other public facilities are adequate for the densities allowed.
 4. Existing lot development patterns and policies embodied in the Plan will also guide application of this zoning district.
10. Uses permitted within the R-2 Zone include single-family residential dwellings, market and community gardens, group child care facilities, and public parks and recreational facilities. The minimum lot size for parcels within the R-2 Zone is 7,000 sf and the minimum lot width is 60 feet.
11. The applicant is proposing to subdivide the 22.93-acre area with 40 lots ranging from 12,077 square feet to 27,491 square feet in size, referred to as Pine View Subdivision.
12. All of the proposed lots are within the R-2 Zone and meet the minimum lot size and width requirements.
13. The subject property has existing access via Moser Street, and will have access via Third Street when the Rolling Hills 10th Subdivision is extended to the southern portion of the property, which is anticipated this summer. Moser Street is a local neighborhood street which will be constructed to the 28-foot-wide street standard which includes curb, gutter, tree lawns, and sidewalks on both sides of the street and on-street parking on one side of the street.
14. Another local street, Whitetail Lane, extends in the east/west direction through the center of the subdivision and terminates in a cul-de-sac on the western portion of the property and extends to the property line of the adjacent undeveloped property on the east side. Whitetail lane will be constructed to the 28-foot-wide local street standard.
15. Third Street will be extended through the subdivision in the northerly direction and will change street names to Moose Drive at its intersection with Moser Street. Moose Drive will extend to

the northern property line and terminate in a cul-de-sac for fire truck turnaround requirements. However, right-of-way will be extended to the north property line to allow for the future connection with 'D' Street when it is extended in the future. Third Street and Moose Drive are designated as collector streets with a 34-foot-wide roadway with two travel lanes, bike lanes on both sides of the street, and curbing and gutters on both sides of the street.

16. There is currently a corridor dedicated at the end of Moser Street which is intended to provide access to the Moser Park property. The Council finds that a pedestrian walkway shall be extended from Whitetail Lane south to Moser Street in order to provide a more direct pedestrian route to the park property, as well as a shorter distance to McDonald School. The Council also finds that a pedestrian walkway shall be provided from Whitetail Lane north to the property boundary of the adjacent undeveloped property for future pedestrian connectivity if that property were to be developed at some point in the future.
17. Water services are proposed to be extended throughout the subdivision from the existing main within Moser Street and the future main along the Third Street alignment within Rolling Hills 10th Addition.
18. It is anticipated that under commonly observed household water use within the City (114 gallons per day per occupant) that the proposed development could be reasonably anticipated to use approximately 3.74 million gallons of water per year (40 du x 2.25 occupants/du x 114 gallons/occupant x 365 days/year = 3.74 M gallons/year).
19. Sanitary sewer is proposed to be extended throughout the subdivision and conveyed along an existing utility easement along the future alignment of 'D' Street. The subject property is considered developable in the Comprehensive Sewer System Plan.
20. Storm sewer will be piped and directed to a stormwater detention pond in the northwest corner of the subdivision. The detention facilities of the proposed development will need to meet Moscow's Stormwater Runoff Control Standards which require the stormwater to be detained to the pre-development rate. The stormwater is then conveyed to existing mains within 'D' Street.
21. The proposed subdivision falls under the requirements of the parkland dedication codes of the City. However, the parkland dedication requirements have previously been satisfied with a parkland dedication of 1.37 acres towards the creation of the City's Moser Park property in 1994. Therefore, no further parkland dedication is required.
22. The applicant conducted a neighborhood meeting with affected property owners within 600 ft. of the subject property on October 5, 2023 to discuss the proposal.

BASED ON THE ABOVE RELEVANT FACTS AND CONCLUSIONS, THE CITY COUNCIL OF THE CITY OF MOSCOW HEREBY FINDS THE FOLLOWING RELEVANT CRITERIA AND STANDARDS:

II. RELEVANT CRITERIA AND STANDARDS

1. **The proposed subdivision is in conformance with all applicable City Code requirements.**
The proposed preliminary plat is consistent with and in conformance with the requirements and provisions of the Moderate Density, Single Family Residential (R-2) Zoning District, including lot area, dimensions and other relevant provisions. The proposed preliminary plat is also in conformance with the general requirements of the Moscow Subdivision Ordinance including, but not limited to, the provision of the logical and orderly connection to the City's street network, public utilities, and the provision of public parkland.


2. **The proposed subdivision is in general conformance with the Comprehensive Plan.** The proposed preliminary plat is consistent with the City of Moscow Comprehensive Plan and provides for the logical and orderly development and extension of the City's street system. The proposed lots sizes and densities are consistent with the proposed Comprehensive Plan Land Use designation of Auto-Urban Residential.
3. **Public Services and utilities are available or can be made available and are adequate to accommodate the proposed subdivision.** The subject property has direct access to Moser Street and eventually Third Street. Water and Sewer connections are readily available in the area and are proposed to be extended through the subdivision.
4. **The proposed subdivision will not be detrimental to the public health, safety, or general welfare.** The proposed preliminary plat provides for the extension of City streets and services and will not be detrimental to the public health, safety, or general welfare.

III. DECISION

Based on the above Reasoned Statement of Relevant Criteria, the City Council of the City of Moscow approves the preliminary subdivision plat request for the twenty-two point nine three (22.93) acre property generally located east of the current terminus of Moser Street with the following conditions:

1. The proposed subdivision shall be analyzed in the City's water system model to verify that the current design will have adequate potable and fire flow requirements, and if there are deficiencies the applicant shall be responsible for the construction of the improvements needed to adequately serve the subdivision.
2. The applicant shall work with the City to determine whether the 'D' Street sanitary sewer connection is sufficient to accommodate the proposed subdivision, and if there are deficiencies the applicant shall be responsible for the construction of the improvements needed to adequately serve the subdivision.
3. In accordance with a prior development agreement (Latah County Instrument No. 412000), the applicant shall be responsible for the construction of all public improvements from the current terminus of Moser Street to the subject property.
4. The applicant shall be required to conduct a detailed stormwater discharge analysis to include any mitigation actions necessary to ensure that the stormwater facility shall have no downstream adverse impacts subject to the approval of the City Engineer.
5. An emergency vehicle turnaround will need to be provided at the eastern terminus of Whitetail Lane and the road, improvements, and utilities will need to be extended to the eastern property boundary of the subject property.
6. The applicant shall provide adequate access to at least every other manhole for the sanitary sewer and storm sewer mains for maintenance.
7. The applicant shall connect the water line in the Whitetail Lane cul-de-sac to the water line in Moser Street for water quality and redundancy purposes.
8. The applicant shall extend a pedestrian walkway from Whitetail Lane south to Moser Street and north to the property boundary of the adjacent undeveloped property.

PASSED BY THE CITY COUNCIL OF THE CITY OF MOSCOW this 6th day of May, 2024.



Arthur D. Bettge, Mayor

**BEFORE THE CITY COUNCIL
OF THE CITY OF MOSCOW, COUNTY OF LATAH,
STATE OF IDAHO**

REASONED STATEMENT OF RELEVANT CRITERIA AND STANDARDS

REASONED STATEMENT OF RELEVANT CRITERIA AND STANDARDS REGARDING THE REVIEW OF A TWO POINT FIVE THREE (2.53) ACRE PROPERTY PROPOSED TO BE ANNEXED INTO THE CITY OF MOSCOW AND GENERALLY LOCATED EAST OF THE CURRENT TERMINUS OF WILDROSE DRIVE AND SOUTH OF FLOMER LANE.

WHEREAS, the applicant filed an application for Annexation, Comprehensive Plan Land Use Designation, Rezone, Preliminary Plat, and Planned Unit Development on March 5, 2024; and

WHEREAS, this matter came before the Moscow Planning and Zoning Commission during a duly noticed public hearing on March 27, 2024; and

WHEREAS, this matter came before the Moscow City Council during a duly noticed public hearing on May 6, 2024; and

WHEREAS, having reviewed the application, including all exhibits entered, and having considered the issues presented by the applicant and the opponents:

THE CITY COUNCIL OF THE CITY OF MOSCOW, IDAHO, AFTER DUE DELIBERATION AND CONSIDERATION, HEREBY CONCLUDES:

I. RELEVANT FACTS AND CONCLUSIONS

1. The City Council considered the request pursuant to the City of Moscow 2019 Comprehensive Plan, City of Moscow Zoning Ordinance, the Local Land Use Planning Act, and other applicable development regulations.
2. The subject property is a 2.53-acre property generally located east of the current terminus of Wildrose Drive and south of Flomer Lane.
3. The subject property is a 2.53-acre parcel that currently contains an accessory structure adjacent to Flomer Lane. The subject property is surrounded by Ridgeview Estates 2nd Subdivision to the west, Southgate 2nd Subdivision to the northwest, and primarily single-family residential properties located within Latah County to the north, east, and south.
4. Within the 2019 Moscow Comprehensive Plan, the subject property is currently designated as Auto-Urban Residential and the proposal is to retain that designation.
5. Auto-Urban Residential (AU-R) designated areas,
“contain predominantly single-family detached homes on lots ranging from 7,000 to 11,000 square feet in size and are more isolated from surrounding uses which may require residents

to rely more on automobile transportation. This designation includes those areas generally anticipated to be developed for low- to moderate-density residential uses at densities between three to six units per acre which could include a mix of detached single-family, twinhome, and townhome residential dwellings. Appropriate current zoning for Auto-Urban Residential designated areas include Low Density Residential (R-1), Moderate Density Single Family Residential (R-2) and Medium Density Residential (R-3) in order to include a mixture of attached and detached dwellings where appropriate.”

6. All surrounding land is currently designated as Auto-Urban Residential, with the exception of the parks and pathways in the area which are designated as Parks and Open Space.
7. The subject property and adjacent properties immediately to the north, east, and south within Latah County are currently designated as the Low Density, Single Family Residential (R-1) Zone.
8. Ridgeview Estates 2nd Addition to the west is zoned a combination of Low Density, Single Family Residential (R-1), Moderate Density, Single Family Residential (R-2), and Medium Density Residential (R-3).
9. The subject property has street access via Wildrose Drive and Flomer Lane and is shaped like a “U”. Wildrose Drive which is designated as a local residential street that has been constructed as part of Ridgeview Estates 2nd Addition.
10. Water and Sewer mains currently exist within the existing terminus of Wildrose Drive, and are of sufficient capacity to accommodate any proposed use the R-2 Zone would allow.
11. The applicant conducted a neighborhood meeting with affected property owners within 600 feet of the subject property on November 16, 2023 to discuss the proposed rezone.
12. Based upon the availability of public services, constructed adjacent roadway, access and surrounding land use patterns, the City Council concludes that it is appropriate for the property to be designated as Auto-Urban Residential upon annexation into the City of Moscow.

BASED ON THE ABOVE RELEVANT FACTS AND CONCLUSIONS, THE CITY COUNCIL OF THE CITY OF MOSCOW HEREBY FINDS THE FOLLOWING RELEVANT CRITERIA AND STANDARDS:

II. RELEVANT CRITERIA AND STANDARDS


1. **The proposed Comprehensive Plan amendment is consistent with Comprehensive Plan goals, objectives, and implementation actions.** The proposed designation for the subject property of Auto-Urban Residential is consistent with the purposes, goals, objectives and policies of the Comprehensive Plan and are consistent with the surrounding properties, as well as the surrounding land use and development patterns.
2. **The proposed Comprehensive Plan amendment would provide for the logical and orderly location of land uses, community services and facilities.** The City Council finds that the existing designation of Auto-Urban Residential is logical and harmonious with the surrounding land uses and development, and is consistent with the land use designations entirely surrounding the subject property.

3. **The uses expected to occur as a result of the Comprehensive Plan amendment will be compatible with the surrounding area.** The zoning districts that are consistent with the Auto-Urban Residential designation exist in the surrounding subdivisions. The adjacent properties are primarily single-family residential subdivisions.
4. **The size, type, and density of development expected to occur as a result of the Comprehensive Plan amendment will not place an undue burden upon delivery of services provided by any political subdivision within the planning jurisdiction.** The proposed designation is suitable for the area and will not unduly burden the neighborhood of public infrastructure. The subject property has direct access, via Wildrose Drive and Flomer Lane, as well as sufficient and available public utility services to meet the needs of existing and future development.
5. **The proposed Comprehensive Plan amendment is deemed to be appropriate in consideration of changing conditions within the community that are not reflected within the current Comprehensive Plan (such as new development or re-development, land use patterns and/or trends, traffic patterns and/or volume, market demands, community vision and/or needs, capital improvements, or new or revised City plans).** The proposal is to retain the existing Comprehensive Plan land use designation.

III. DECISION

Based on the above Reasoned Statement of Relevant Criteria, the City of Moscow City Council approves retaining the current Comprehensive Plan Land Use Designation of Auto-Urban Residential for the 2.53-acre property with no conditions.

PASSED BY THE CITY COUNCIL OF THE CITY OF MOSCOW this 6th day of May, 2024.



Arthur D. Bettge, Mayor

**BEFORE THE CITY COUNCIL
OF THE CITY OF MOSCOW, COUNTY OF LATAH,
STATE OF IDAHO**

REASONED STATEMENT OF RELEVANT CRITERIA AND STANDARDS

REASONED STATEMENT OF RELEVANT CRITERIA AND STANDARDS REGARDING A REQUEST FOR THE REZONE OF A TWO POINT FIVE THREE (2.53) ACRE PROPERTY PROPOSED TO BE ANNEXED INTO THE CITY OF MOSCOW AND GENERALLY LOCATED EAST OF THE CURRENT TERMINUS OF WILDROSE DRIVE AND SOUTH OF FLOMER LANE FROM THE LOW DENSITY, SINGLE FAMILY RESIDENTIAL (R-1) ZONE TO THE MODERATE DENSITY, SINGLE FAMILY RESIDENTIAL (R-2) ZONE.

WHEREAS, the applicant filed an application for Annexation, Comprehensive Plan Land Use Designation, Rezone, Preliminary Plat, and Planned Unit Development on March 5, 2024; and

WHEREAS, this matter came before the Moscow Planning and Zoning Commission during a duly noticed public hearing on March 27, 2024; and

WHEREAS, this matter came before the Moscow City Council during a duly noticed public hearing on May 6, 2024; and

WHEREAS, having reviewed the application, including all exhibits entered, and having considered the issues presented by the applicant and the opponents:

THE CITY COUNCIL OF THE CITY OF MOSCOW, IDAHO, AFTER DUE DELIBERATION AND CONSIDERATION, HEREBY CONCLUDES:

I. RELEVANT FACTS AND CONCLUSIONS

1. The City Council considered the request pursuant to the City of Moscow 2019 Comprehensive Plan, City of Moscow Zoning Ordinance, the Local Land Use Planning Act, and other applicable development regulations.
2. The subject property is a 2.53-acre property generally located east of the current terminus of Wildrose Drive and south of Flomer Lane.
3. The subject property is a 2.53-acre parcel that currently contains an accessory structure adjacent to Flomer Lane. The subject property is surrounded by Ridgeview Estates 2nd Subdivision to the west, Southgate 2nd Subdivision to the northwest, and primarily single-family residential properties located within Latah County to the north, east, and south.
4. Within the 2019 Moscow Comprehensive Plan, the subject property is currently designated as Auto-Urban Residential and the proposal is to retain that designation.

5. Auto-Urban Residential (AU-R) designated areas,

“contain predominantly single-family detached homes on lots ranging from 7,000 to 11,000 square feet in size and are more isolated from surrounding uses which may require residents to rely more on automobile transportation. This designation includes those areas generally anticipated to be developed for low- to moderate-density residential uses at densities between three to six units per acre which could include a mix of detached single-family, twinhome, and townhome residential dwellings. Appropriate current zoning for Auto-Urban Residential designated areas include Low Density Residential (R-1), Moderate Density Single Family Residential (R-2) and Medium Density Residential (R-3) in order to include a mixture of attached and detached dwellings where appropriate.”
6. All surrounding land is currently designated as Auto-Urban Residential, with the exception of the parks and pathways in the area which are designated as Parks and Open Space.
7. The subject property and adjacent properties immediately to the north, east, and south within Latah County are currently designated as the Low Density, Single Family Residential (R-1) Zone.
8. Ridgeview Estates 2nd Addition to the west is zoned a combination of Low Density, Single Family Residential (R-1), Moderate Density, Single Family Residential (R-2), and Medium Density Residential (R-3).
9. The applicant is proposing to rezone the 2.53-acre parcel from the Low Density, Single Family Residential (R-1) Zone to the Moderate Density, Single Family Residential (R-2) Zone.
10. According to the City of Moscow Zoning Code, the R-2 Zoning District is a moderate density residential zone appropriate where the following circumstances are present:
 1. Single family dwellings predominate.
 2. The terrain is not harshly irregular and smaller lot sizes can be accommodated without extensive earthwork.
 3. Utilities and other public facilities are adequate for the densities allowed.
 4. Existing lot development patterns and policies embodied in the Plan will also guide application of this zoning district.
11. Uses permitted within the R-2 Zone include single-family residential dwellings, market and community gardens, group child care facilities, and public parks and recreational facilities. The minimum lot size for parcels within the R-2 Zone is 7,000 sf and the minimum lot width is 60 feet.
12. The subject property has street access via Wildrose Drive and Flomer Lane and is shaped like a “U”. Wildrose Drive which is designated as a local residential street that has been constructed as part of Ridgeview Estates 2nd Addition.
13. Water and Sewer mains currently exist within the existing terminus of Wildrose Drive, and are of sufficient capacity to accommodate any proposed use the R-2 Zone would allow.
14. The applicant conducted a neighborhood meeting with affected property owners within 600 feet of the subject property on November 16, 2023 to discuss the proposed rezone.

BASED ON THE ABOVE RELEVANT FACTS AND CONCLUSIONS, THE CITY COUNCIL OF THE CITY OF MOSCOW HEREBY FINDS THE FOLLOWING RELEVANT CRITERIA AND STANDARDS:


II. RELEVANT CRITERIA AND STANDARDS

- 1. The proposed rezone is consistent with Comprehensive Plan goals, objectives, and implementation actions.** The proposed rezone is consistent with the proposed 2019 Comprehensive Plan Land Use Designations of Auto-Urban Residential.
- 2. The proposed rezone would provide for the logical and orderly location of land uses and community services and facilities.** The proposed Moderate Density, Single Family Residential (R-2) Zone is consistent with the zoning designations to the west within Ridgeview Estates 2nd Addition Subdivision. The proposed zoning and uses are consistent with the surrounding area and will not unduly burden the neighborhood of public infrastructure.
- 3. The uses expected to occur as a result of the rezone will be compatible with the surrounding area.** The proposed zoning is consistent with adjacent zoning districts and will create a logical and orderly zoning configuration for the subject area. The adjacent properties within Ridgeview Estates 2nd Addition Subdivision are a combination of the Low Density, Single Family Residential (R-1), Moderate Density, Single Family Residential (R-2), and Medium Density Residential (R-3) Zoning Districts.
- 4. The size, type, and density of development expected to occur as a result of the rezone will not place an undue burden upon delivery of services provided by any political subdivision within the planning jurisdiction.** The proposed zoning and uses are suitable for the area and will not unduly burden the area of public infrastructure.
- 5. The size, type, and density of development expected to occur as a result of the rezone can be adequately served by the existing transportation network, public facilities and services.** The subject property has street access via Wildrose Drive and Flomer Lane, which can adequately serve any proposed development allowed in the R-2 Zone. The subject property has sufficient and available public utility services to meet the needs of existing and future development.

III. DECISION

Based on the above Reasoned Statement of Relevant Criteria, the City Council of the City of Moscow approves the rezone request for the two point five three (2.53) acre property generally located east of the current terminus of Wildrose Drive and south of Flomer Lane from the Low Density, Single Family Residential (R-1) Zone to the Moderate Density, Single Family Residential (R-2) Zone with no conditions.

PASSED BY THE CITY COUNCIL OF THE CITY OF MOSCOW this 6th day of May, 2024.



Arthur D. Bettge, Mayor

**BEFORE THE CITY COUNCIL
OF THE CITY OF MOSCOW, COUNTY OF LATAH,
STATE OF IDAHO**

REASONED STATEMENT OF RELEVANT CRITERIA AND STANDARDS

REASONED STATEMENT OF RELEVANT CRITERIA AND STANDARDS REGARDING A REQUEST FOR A PRELIMINARY SUBDIVISION PLAT OF A TWO POINT FIVE THREE (2.53) ACRE PROPERTY PROPOSED TO BE ANNEXED INTO THE CITY OF MOSCOW AND GENERALLY LOCATED EAST OF THE CURRENT TERMINUS OF WILDROSE DRIVE AND SOUTH OF FLOMER LANE, KNOWN AS WILDROSE COURT ADDITION TO THE CITY OF MOSCOW, IDAHO.

WHEREAS, the applicant filed an application for Annexation, Comprehensive Plan Land Use Designation, Rezone, Preliminary Plat, and Planned Unit Development on March 5, 2024; and

WHEREAS, this matter came before the Moscow Planning and Zoning Commission during a duly noticed public hearing on March 27, 2024; and

WHEREAS, this matter came before the Moscow City Council during a duly noticed public hearing on May 6, 2024; and

WHEREAS, having reviewed the application, including all exhibits entered, and having considered the issues presented by the applicant and the opponents:

THE CITY COUNCIL OF THE CITY OF MOSCOW, IDAHO, AFTER DUE DELIBERATION AND CONSIDERATION, HEREBY CONCLUDES:

I. RELEVANT FACTS AND CONCLUSIONS

1. The City Council considered the request pursuant to the City of Moscow 2019 Comprehensive Plan, City of Moscow Zoning Ordinance, the Local Land Use Planning Act, and other applicable development regulations.
2. The subject property is a 2.53-acre property generally located east of the current terminus of Wildrose Drive and south of Flomer Lane.
3. The subject property is a 2.53-acre parcel that currently contains an accessory structure adjacent to Flomer Lane. The subject property is surrounded by Ridgeview Estates 2nd Subdivision to the west, Southgate 2nd Subdivision to the northwest, and primarily single-family residential properties located within Latah County to the north, east, and south.
4. Within the 2019 Moscow Comprehensive Plan, the subject property is currently designated as Auto-Urban Residential and the proposal is to retain that designation.
5. Auto-Urban Residential (AU-R) designated areas,
“contain predominantly single-family detached homes on lots ranging from 7,000 to 11,000 square feet in size and are more isolated from surrounding uses which may require residents

to rely more on automobile transportation. This designation includes those areas generally anticipated to be developed for low- to moderate-density residential uses at densities between three to six units per acre which could include a mix of detached single-family, twinhome, and townhome residential dwellings. Appropriate current zoning for Auto-Urban Residential designated areas include Low Density Residential (R-1), Moderate Density Single Family Residential (R-2) and Medium Density Residential (R-3) in order to include a mixture of attached and detached dwellings where appropriate.”

6. All surrounding land is currently designated as Auto-Urban Residential, with the exception of the parks and pathways in the area which are designated as Parks and Open Space.
7. The subject property and adjacent properties immediately to the north, east, and south within Latah County are currently designated as the Low Density, Single Family Residential (R-1) Zone.
8. Ridgeview Estates 2nd Addition to the west is zoned a combination of Low Density, Single Family Residential (R-1), Moderate Density, Single Family Residential (R-2), and Medium Density Residential (R-3).
9. The applicant is proposing to rezone the 2.53-acre parcel from the Low Density, Single Family Residential (R-1) Zone to the Moderate Density, Single Family Residential (R-2) Zone.
10. According to the City of Moscow Zoning Code, the R-2 Zoning District is a moderate density residential zone appropriate where the following circumstances are present:
 1. Single family dwellings predominate.
 2. The terrain is not harshly irregular and smaller lot sizes can be accommodated without extensive earthwork.
 3. Utilities and other public facilities are adequate for the densities allowed.
 4. Existing lot development patterns and policies embodied in the Plan will also guide application of this zoning district.
11. Uses permitted within the R-2 Zone include single-family residential dwellings, market and community gardens, group child care facilities, and public parks and recreational facilities. The minimum lot size for parcels within the R-2 Zone is 7,000 sf and the minimum lot width is 60 feet.
12. The applicant is proposing to subdivide the 2.53-acre area into 16 lots ranging from 3,000 square feet to 10,666 square feet in size, referred to as the Wildrose Court Subdivision.
13. The applicant has proposed a PUD to coincide with the preliminary plat and is requesting numerous Zoning Code deviations to accommodate smaller lot sizes and more compact development.
14. The applicant is proposing a reduction in the minimum lot area and minimum lot width for the subdivision. Lot 6 which is adjacent to Flomer Lane is 10,666 in size and 85.21 feet in width, which is the only lot that meets the minimum lot size and width requirements of the R-2 Zone. The remainder of the lots range from 3,000 sq ft to 4,654 sq ft in size and 50 to approximately 58 feet in width. The minimum lot size for the R-2 Zone is 7,000 sq ft and the minimum lot width is 60 feet.
15. The setback requirements for the R-2 Zone are 20 feet in the front, 20 feet in the rear, and a minimum of 5 feet on the side. The applicant is proposing the setbacks of 13 feet in the front, 15 feet in the rear, and 5 feet on the side. The proposed average building height of the single-family dwellings of approximately 28 feet is within the maximum height requirement of 35 feet for the R-2 Zone.

16. The subject property has street access via Wildrose Drive and Flomer Lane and is shaped like a “U”. Wildrose Drive which is designated as a local residential street that has been constructed as part of Ridgeview Estates 2nd Addition.
17. The applicant is proposing a private street which loops through the development named Wildrose Circle. Wildrose Circle will meet the City’s private street standard and includes a 28-foot-wide roadway with curbing on both sides of the street and sidewalks and on-street parking on one side of the street.
18. Two of the proposed lots (one of which is the open space parcel) will have street frontage on Flomer Lane, which is a County road that is developed to an approximately 20-foot width and surfaced with gravel.
19. Water mains will be extended throughout the subdivision from the mains within the existing terminus of Wildrose Drive. The property is considered developable in the City’s Comprehensive Water System Plan dated January 2012.
20. Sanitary sewer is proposed to be extended throughout the subdivision from the mains within the existing terminus of Wildrose Drive. The subject property is within the Southeast Sewer District, which will require consent from the District to connect. The City’s Comprehensive Sewer Plan specifies that the city can provide sanitary sewer service to this Addition. As shown on the 2030 peak hour flow projection figure from the Plan, Sanitary sewer mains utilized by Wildrose Subdivision have more than adequate capacity for the proposed subdivision. The main between the Southeast Sewer Lift Station and Carmichael Road is shown to have 50 to 75% pipe capacity remaining. The remainder of the Southeast Sewer District piping is shown to have greater than 75% pipe capacity remaining. Additionally, the South East Sewer Lift Station was designed and constructed with capacity for the 2030 peak hour flow growth scenario and is shown to have more than adequate capacity to serve the Addition.
21. Storm sewer will be piped and directed to a stormwater detention pond located near the entrance to the subdivision. The detention facilities of the proposed development will need to meet Moscow’s Stormwater Runoff Control Standards which required the stormwater to be detained to the pre-development rate before entering the City’s storm system.
22. The proposed subdivision falls under the requirements of the parkland dedication codes of the City. Based on the proposed preliminary plat, the net developable area is 63,549 sf or 1.46 acres. The proposed R-2 Zone has a requirement of 5% for parkland dedication, which requires 3,177 sf or 0.07 acres in parkland dedication. The Moscow Pathways Commission considered the proposal on February 13, 2024 and recommended approval of the parkland dedication for a twenty (20) foot corridor for the construction of an eight (8) foot pathway for a total parkland dedication of 3,202 sf. The Parks and Recreation Commission considered the Moscow Pathways Commission’s recommendation and the proposal during their February 22, 2024 meeting. The Parks and Recreation Commission also recommended approval of the 3,202 sf pathway corridor and constructed eight (8) foot pathway as proposed. The parkland dedication, as proposed, meets and slightly exceeds the parkland dedication requirements under Moscow City Code.
23. The applicant conducted a neighborhood meeting with affected property owners within 600 ft. of the subject property on November 16, 2023 to discuss the proposal.

BASED ON THE ABOVE RELEVANT FACTS AND CONCLUSIONS, THE CITY COUNCIL OF THE CITY OF MOSCOW HEREBY FINDS THE FOLLOWING RELEVANT CRITERIA AND STANDARDS:

II. RELEVANT CRITERIA AND STANDARDS


- 1. The proposed subdivision is in conformance with all applicable City Code requirements.** The proposed preliminary plat is consistent with and in conformance with the requirements and provisions of Planned Unit Development chapter of the City Code. The proposed preliminary plat is also in conformance with the general requirements of the Moscow Subdivision Ordinance including, but not limited to, the provision of the logical and orderly connection to the City's street network, public utilities, and the provision of public parkland.
- 2. The proposed subdivision is in general conformance with the Comprehensive Plan.** The proposed preliminary plat is consistent with the City of Moscow Comprehensive Plan and provides for the logical and orderly development and extension of the City's street system. The proposed lots sizes and densities are consistent with the proposed Comprehensive Plan Land Use designation of Auto-Urban Residential.
- 3. Public Services and utilities are available or can be made available and are adequate to accommodate the proposed subdivision.** The subject property has direct access to Wildrose Drive and Flomer Lane which are local neighborhood streets. Water and Sewer connections are readily available in the area and are proposed to be extended through the subdivision.
- 4. The proposed subdivision will not be detrimental to the public health, safety, or general welfare.** The proposed preliminary plat provides for the extension of City streets and services and will not be detrimental to the public health, safety, or general welfare.

III. DECISION

Based on the above Reasoned Statement of Relevant Criteria, the City Council of the City of Moscow approves the preliminary subdivision plat request for the two-point five three (2.53) acre area of land generally located east of the current terminus of Wildrose Drive and south of Flomer Lane with the following conditions:

1. The proposed subdivision shall be analyzed in the City's water system model to verify that the current design will have adequate potable and fire flow requirements, and if there are deficiencies the applicant shall be responsible for the construction of the improvements needed to adequately serve the subdivision.
2. The applicant shall gain approval of the Southeast Sewer District to accept Sanitary Sewer Water in a form acceptable to both the City and the District.
3. The applicant shall dedicate 10 feet of right-of-way along the Flomer Lane frontage of the subject property in order to accommodate the construction of a local street per City Standards in the future in the event it becomes necessary to do so.
4. The applicant shall be required to conduct a detailed stormwater discharge analysis to include any mitigation actions necessary to ensure that the stormwater facility shall have no downstream adverse impacts subject to the approval of the City Engineer.
5. The applicant shall extend the water main currently terminating at Lot 13 to the south to connect with the water main within Wildrose Court to improve water quality and redundancy in the subdivision.

PASSED BY THE CITY COUNCIL OF THE CITY OF MOSCOW this 6th day of May, 2024.



Arthur D. Bettge, Mayor

**BEFORE THE CITY COUNCIL
OF THE CITY OF MOSCOW, COUNTY OF LATAH,
STATE OF IDAHO**

REASONED STATEMENT OF RELEVANT CRITERIA AND STANDARDS

REASONED STATEMENT OF RELEVANT CRITERIA AND STANDARDS REGARDING A REQUEST FOR A PLANNED UNIT DEVELOPMENT (PUD) OF A TWO POINT FIVE THREE (2.53) ACRE PROPERTY PROPOSED TO BE ANNEXED INTO THE CITY OF MOSCOW AND GENERALLY LOCATED EAST OF THE CURRENT TERMINUS OF WILDROSE DRIVE AND SOUTH OF FLOMER LANE, KNOWN AS WILDROSE COURT ADDITION TO THE CITY OF MOSCOW, IDAHO.

WHEREAS, the applicant filed an application for Annexation, Comprehensive Plan Land Use Designation, Rezone, Preliminary Plat, and Planned Unit Development on March 5, 2024; and

WHEREAS, this matter came before the Moscow Planning and Zoning Commission during a duly noticed public hearing on March 27, 2024; and

WHEREAS, this matter came before the Moscow City Council during a duly noticed public hearing on May 6, 2024; and

WHEREAS, having reviewed the application, including all exhibits entered, and having considered the issues presented by the applicant and the opponents:

THE CITY COUNCIL OF THE CITY OF MOSCOW, IDAHO, AFTER DUE DELIBERATION AND CONSIDERATION, HEREBY CONCLUDES:

I. RELEVANT FACTS AND CONCLUSIONS

1. The City Council considered the request pursuant to the City of Moscow 2019 Comprehensive Plan, City of Moscow Zoning Ordinance, the Local Land Use Planning Act, and other applicable development regulations.
2. The subject property is a 2.53-acre property generally located east of the current terminus of Wildrose Drive and south of Flomer Lane.
3. The subject property is a 2.53-acre parcel that currently contains an accessory structure adjacent to Flomer Lane. The subject property is surrounded by Ridgeview Estates 2nd Subdivision to the west, Southgate 2nd Subdivision to the northwest, and primarily single-family residential properties located within Latah County to the north, east, and south.
4. Within the 2019 Moscow Comprehensive Plan, the subject property is currently designated as Auto-Urban Residential and the proposal is to retain that designation.
5. Auto-Urban Residential (AU-R) designated areas,
“contain predominantly single-family detached homes on lots ranging from 7,000 to 11,000 square feet in size and are more isolated from surrounding uses which may require residents to rely more on automobile transportation. This designation includes those areas generally anticipated to be developed for low- to moderate-density residential uses at densities between

three to six units per acre which could include a mix of detached single-family, twinhome, and townhome residential dwellings. Appropriate current zoning for Auto-Urban Residential designated areas include Low Density Residential (R-1), Moderate Density Single Family Residential (R-2) and Medium Density Residential (R-3) in order to include a mixture of attached and detached dwellings where appropriate.”

6. All surrounding land is currently designated as Auto-Urban Residential, with the exception of the parks and pathways in the area which are designated as Parks and Open Space.
7. The subject property and adjacent properties immediately to the north, east, and south within Latah County are currently designated as the Low Density, Single Family Residential (R-1) Zone.
8. Ridgeview Estates 2nd Addition to the west is zoned a combination of Low Density, Single Family Residential (R-1), Moderate Density, Single Family Residential (R-2), and Medium Density Residential (R-3).
9. The applicant is proposing to rezone the 2.53-acre parcel from the Low Density, Single Family Residential (R-1) Zone to the Moderate Density, Single Family Residential (R-2) Zone.
10. According to the City of Moscow Zoning Code, the R-2 Zoning District is a moderate density residential zone appropriate where the following circumstances are present:
 1. Single family dwellings predominate.
 2. The terrain is not harshly irregular and smaller lot sizes can be accommodated without extensive earthwork.
 3. Utilities and other public facilities are adequate for the densities allowed.
 4. Existing lot development patterns and policies embodied in the Plan will also guide application of this zoning district.
11. Uses permitted within the R-2 Zone include single-family residential dwellings, market and community gardens, group child care facilities, and public parks and recreational facilities. The minimum lot size for parcels within the R-2 Zone is 7,000 sf and the minimum lot width is 60 feet.
12. The applicant is proposing to subdivide the 2.53-acre area into 16 lots ranging from 3,000 square feet to 10,666 square feet in size, referred to as the Wildrose Court Subdivision.
13. The applicant has proposed a PUD to coincide with the preliminary plat and is requesting numerous Zoning Code deviations to accommodate smaller lot sizes and more compact development.
14. The applicant has proposed that 15 of the lots would have a similar style of single-family home constructed on the property. The single-family home is a three-story design with the lower level partially daylighted on one side to follow the contours of the property. The home is a modern shed roof design which includes alternating horizontal and vertical fiber-cement lap siding. There are 3-4 floor plan options that are available which vary from floor to floor.
15. The applicant is proposing a reduction in the minimum lot area and minimum lot width for the subdivision. Lot 6 which is adjacent to Flomer Lane is 10,666 in size and 85.21 feet in width, which is the only lot that meets the minimum lot size and width requirements of the R-2 Zone. The remainder of the lots range from 3,000 sq ft to 4,654 sq ft in size and 50 to approximately 58 feet in width. The minimum lot size for the R-2 Zone is 7,000 sq ft and the minimum lot width is 60 feet.

16. The setback requirements for the R-2 Zone are 20 feet in the front, 20 feet in the rear, and a minimum of 5 feet on the side. The applicant is proposing the setbacks of 13 feet in the front, 15 feet in the rear, and 5 feet on the side. The proposed average building height of the single-family dwellings of approximately 28 feet is within the maximum height requirement of 35 feet for the R-2 Zone.
17. The minimum PUD base density of the R-2 Zone is 4.8 dwelling units per acre. The proposed PUD has a net developable area of 2.53 acres, which results in a base density of 12.16 dwelling units. Since the proposal exceeds the base density with 16 dwelling units, the applicant needs to achieve a 32% bonus density on the project. The PUD section allows for numerous ways of achieving bonus density and the applicant has chosen to focus on increases to the common open space of the development, provisions of pedestrian and bicycle path connectivity, maintenance of existing land contours, and also sustainable development practices.
18. Bonuses may be awarded for providing functional, common open space, which may be in the form of natural areas, floodplains, wetlands, stands of trees or other natural vegetation or riparian areas, playgrounds, active or passive recreational areas, internal pedestrian and/or bike paths and similar areas. Up to a 10% maximum bonus may be awarded if at least 20% of the proposed PUD area is devoted for functional common open space, in excess of any open space required elsewhere in the Code. The applicant has proposed to dedicate approximately 10% of the total area to open space, which the City Council has determined would warrant a 5% density bonus.
19. The applicant has also proposed to incorporate a number of energy conservation and green building materials within the development. Under the sustainable development section of density bonuses, a 15% increase may be awarded. The applicant has proposed to incorporate the following provisions:
 1. Wall Cavities Netted and Blown, Resulting in a R-23 Rating
 2. Energy Star Rated Windows and HVAC System
 3. Energy Star Efficient Appliances
 4. Efficient Framing Methods
 5. Onsite Recycling for Construction Materials
 6. Locate HVAC System in Living Space Envelope (Not in Garage)
 7. Use of Local Materials and/or Environmentally Preferred Products
20. Based upon the incorporation of the proposed sustainable development measures, the City Council has determined that a 12% density bonus is warranted.
21. Bonuses may be awarded for increasing pedestrian, bicycle and/or vehicular connectivity between the proposed development and existing and/or future neighborhoods. To be awarded the bonus, such connectivity shall be in excess of adopted City policy and standards. The applicant is proposing to connect the existing path within Southgate 2nd Addition to Wildrose Circle through the open space parcel. A maximum 10% bonus may be awarded under this category. The applicant has exceeded the parkland dedication requirement and chosen to develop the pathway instead of traditional parkland, so the City Council has determined that a 5% density bonus is warranted.
22. A 5% maximum bonus may be awarded if the applicant provides a landscaping plan that is significantly in excess of the minimum landscaping otherwise required by the Zoning Code and that it would provide significantly greater benefit to the PUD site or the neighborhood. The applicant has proposed a landscape plan that retains existing landscaping and exceeds the

landscaping requirements required by code. However, it is the City Council's determination that in order to achieve the full 5% density bonus, a landscape plan needs to be provided for each lot, as well as the entrance to the subdivision. Should this additional landscape plan be provided, it is the City Council's determination that a 5% density bonus is warranted.

23. A 10% bonus may be awarded for the maintenance of existing land contours, vegetation, or other special site features. Bonuses will be awarded based on the amount of site disturbance including whether there is minimal or slight disturbance; whether there is excavation other than for structural foundations; whether streets follow contours of the land; amount of grading; and whether there is removal of natural vegetation. It is the City Council's determination that the applicant has designed the site to minimize the amount of site disturbance and has designed the single-family dwellings to be daylighted on one side in order to preserve the contours of the site. There are no slopes greater than 20% on the site or other natural features, but it is the City Council's determination that the preservation of the existing site contours warrants a 5% density bonus.
24. The sum of the total density bonuses proposed totals 32%, which is the density bonus required to achieve 16 dwelling units on the property.
25. The subject property has street access via Wildrose Drive and Flomer Lane and is shaped like a "U". Wildrose Drive which is designated as a local residential street that has been constructed as part of Ridgeview Estates 2nd Addition.
26. The applicant is proposing a private street which loops through the development named Wildrose Circle. Wildrose Circle will meet the City's private street standard and includes a 28-foot-wide roadway with curbing on both sides of the street and sidewalks and on-street parking on one side of the street.
27. Two of the proposed lots (one of which is the open space parcel) will have street frontage on Flomer Lane, which is a County road that is developed to an approximately 20-foot width and surfaced with gravel.
28. Water mains will be extended throughout the subdivision from the mains within the existing terminus of Wildrose Drive. The property is considered developable in the City's Comprehensive Water System Plan dated January 2012.
29. Sanitary sewer is proposed to be extended throughout the subdivision from the mains within the existing terminus of Wildrose Drive. The subject property is within the Southeast Sewer District, which will require consent from the District to connect. The City's Comprehensive Sewer Plan specifies that the city can provide sanitary sewer service to this Addition. As shown on the 2030 peak hour flow projection figure from the Plan, Sanitary sewer mains utilized by Wildrose Subdivision have more than adequate capacity for the proposed subdivision. The main between the Southeast Sewer Lift Station and Carmichael Road is shown to have 50 to 75% pipe capacity remaining. The remainder of the Southeast Sewer District piping is shown to have greater than 75% pipe capacity remaining. Additionally, the South East Sewer Lift Station was designed and constructed with capacity for the 2030 peak hour flow growth scenario and is shown to have more than adequate capacity to serve the Addition.
30. Storm sewer will be piped and directed to a stormwater detention pond located near the entrance to the subdivision. The detention facilities of the proposed development will need to meet Moscow's Stormwater Runoff Control Standards which required the stormwater to be detained to the pre-development rate before entering the City's storm system.
31. The proposed subdivision falls under the requirements of the parkland dedication codes of the City. Based on the proposed preliminary plat, the net developable area is 63,549 sf or 1.46 acres.

The proposed R-2 Zone has a requirement of 5% for parkland dedication, which requires 3,177 sf or 0.07 acres in parkland dedication. The Moscow Pathways Commission considered the proposal on February 13, 2024 and recommended approval of the parkland dedication for a twenty (20) foot corridor for the construction of an eight (8) foot pathway for a total parkland dedication of 3,202 sf. The Parks and Recreation Commission considered the Moscow Pathways Commission's recommendation and the proposal during their February 22, 2024 meeting. The Parks and Recreation Commission also recommended approval of the 3,202 sf pathway corridor and constructed eight (8) foot pathway as proposed. The parkland dedication, as proposed, meets and slightly exceeds the parkland dedication requirements under Moscow City Code.

32. The applicant conducted a neighborhood meeting with affected property owners within 600 ft. of the subject property on November 16, 2023 to discuss the proposal.

BASED ON THE ABOVE RELEVANT FACTS AND CONCLUSIONS, THE CITY COUNCIL OF THE CITY OF MOSCOW HEREBY FINDS THE FOLLOWING RELEVANT CRITERIA AND STANDARDS:

II. RELEVANT CRITERIA AND STANDARDS

1. **The proposed PUD is consistent with the Comprehensive Plan.** The proposed PUD is consistent with the uses and densities designated within the 2019 Comprehensive Plan. The Auto-Urban Residential (AU-R) designation provides low- to moderate-density residential uses at densities between three to six units per acre. Therefore, the City Council finds that the proposed PUD is consistent with the Comprehensive Plan.
2. **The proposed PUD is consistent with the intents and purposes of this Chapter.** The proposed PUD meets the intent of the PUD chapter to permit and encourage innovative, economical, and attractive development; which includes land uses which harmonize with natural features and constraints; which promotes efficient, innovative, economical, attractive, and environmentally sensitive development; and which efficiently phases and locates public and private services and facilities. The proposed PUD utilizes a natural hillside and an existing single-family dwelling within the design and is accessed by a private street which allows for less of an impact to the existing property.
3. **The proposed PUD is compatible with the character and uses in the surrounding area.** The PUD is consistent with the surrounding area which is primarily a mixture of residential developments. The proposed PUD provides smaller lot and house sizes, which provide a more affordable housing option within the surrounding area.
4. **Public services and utilities are available or can be made available and are adequate to accommodate the proposed PUD.** The Engineering Department has indicated that water, sanitary sewer, and storm sewer systems are readily available in the area. The subject property has been determined to be developable in the 2012 Comprehensive Water System Plan and the 2011 Comprehensive Sewer System Plan.
5. **The proposed PUD will not endanger the public health or safety.** There is no evidence that the proposed PUD would have an impact on the public health and safety. The proposed PUD will help serve the need of providing additional single-family homes to meet the needs of a diverse population.
6. **The residential densities, proposed land uses, and design proposed within the PUD promote the innovative, efficient, economic and attractive development of the subject property.** The


proposed PUD has been designed to minimize the amount of site disturbance and the single-family dwellings have been designed to be daylighted on one side in order to preserve the contours of the site. The subject property is accessed by a private street which allows for less of an impact to the existing property.

III. DECISION

Based on the above Reasoned Statement of Relevant Criteria, the City Council of the City of Moscow approves the Planned Unit Development (PUD) request for the 2.53-acre property generally located east of the current terminus of Wildrose Drive and south of Flomer Lane with the following condition:

1. In order to achieve the full 5% density bonus for landscaping, the applicant shall expand the landscape plan to include landscaping on individual lots and the entrance to the subdivision.

PASSED BY THE CITY COUNCIL OF THE CITY OF MOSCOW this 6th day of May, 2024.



Arthur D. Bettge, Mayor